

LIGHT
TING

ADES

ADES

Lighting Innovation



www.ades-lighting.com

ADES

Catalogue

COMPANY INTRODUCTION

TABLE OF CONTENTS

PRODUCTS



About Us

Founded in 2018, ADES Lighting is a leading company in the field of lighting design and providing lighting solutions for commercial, industrial, and residential projects. With extensive experience and dedication to our profession, we take pride in being a trusted partner for many clients in creating comprehensive lighting spaces.

At ADES Lighting, we believe that light is not only a source of illumination but also essential element in creating effective living and working environments. With a deep understanding of light and creative abilities, we offer customized lighting solutions that are tailored to specific project.

The team of experts at ADES consists of architects, lighting engineers, and talented designers who possess in-depth knowledge of lighting technology and design trends. We employ advanced design methods and utilize the latest technologies to create diverse and efficient lighting solutions. We always listen and understand our clients' desires in order to create outstanding living and working spaces that reflect the individuality and essence of each project.

In addition to lighting design, ADES also provides a range of high-quality lighting fixtures from leading manufacturers worldwide. We distribute led lights, decorative lights, smart lighting systems, and various other lighting devices to deliver the most comprehensive lighting solutions.

With a mission to design human-centric lighting, ADES Lighting is committed to delivering optimal lighting solutions that blend artistry and technology, innovative and captivating spaces. Let's work together to create memorable moments of light.



Lighting design consultants

ADES

- Professional
- Creative
- Effective

- A professional lighting design plan is able to accurately calculate the amount of light required without compromising on functionality or wasting energy and money.
- ADES offers lighting design services with the mission Human Centric Lighting.
- ADES's team of design experts clearly understands the needs and standards required for each project. The customer's requirements, preferences or personality will be fully synthesized in a detailed design that will help them improve and upgrade their living space effectively through lighting.
- Let's work together to create memorable moments of light.



Visual Effects

Visual Perception
Lighting is essential for visual perception. Adequate lighting enables us to see and interpret our surroundings accurately.

Visual Comfort
Proper lighting levels and distribution contribute to visual comfort.

Color Perception
Lighting can highlight architectural features, create ambiance and enhance the aesthetics of spaces.

Safety
Adequate lighting is crucial for maintaining safe environments.

Architectural Aesthetic Impact
Lighting can highlight architectural features, create ambiance and enhance the aesthetics of spaces.

Non-Visual Effects

Mood and Emotions
Lighting influences our mood and emotions. Bright, natural light can boost energy and positivity, while dimmer, warmer lighting can create a cozy and relaxed atmosphere.

Productivity Concentration
Proper lighting is essential for maintaining focus and productivity.

Circadian Rhythms
Light plays a significant role in regulating our circadian rhythm, the natural biological processes that control our sleep-wake cycle.

Health
Insufficient or poor-quality lighting can lead to eyestrain, headaches, and other health issues. Proper lighting can help reduce these negative effects.

LIGHTING

is controlling our life




SCIENTIFIC DATA

Under the same light conditions compared with traditional lighting, rhythmic lighting can reduce the level of Melatonin by 18% and improve the concentration by 3%. It can increase Melatonin level by 5% at night and make people enter deep sleep 52 minutes in advance.



The above content is taken from Korea National University

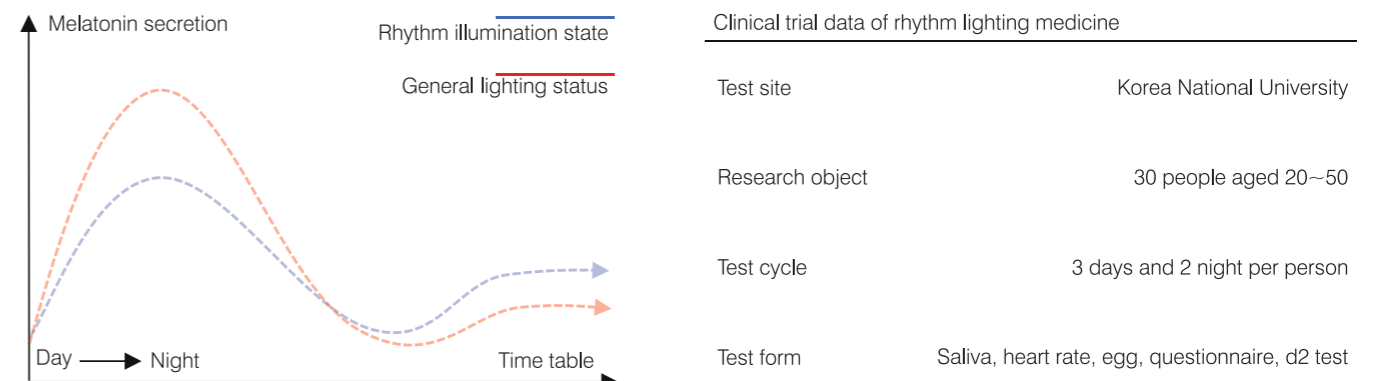


2002

A third type of photoreceptor in the retina, the retinal ganglion photoreceptor, was found. Photobiological effect has been completely explained and developed with the study of non-visual biological effect of light. People have found that the impact of light on human beings is not just to let people see the world at the time; it also affects human physiological rhythm.


Light is closely related to health. Easy digital control based on LED. It can be precisely adjusted according to the needs of the human body for health lighting so as to achieve the controllable characteristics of the main factors of non-visual biological effects of around the application of LED lighting technology design scheme of intelligent health lighting system.

INDOOR


Recessed Ceiling

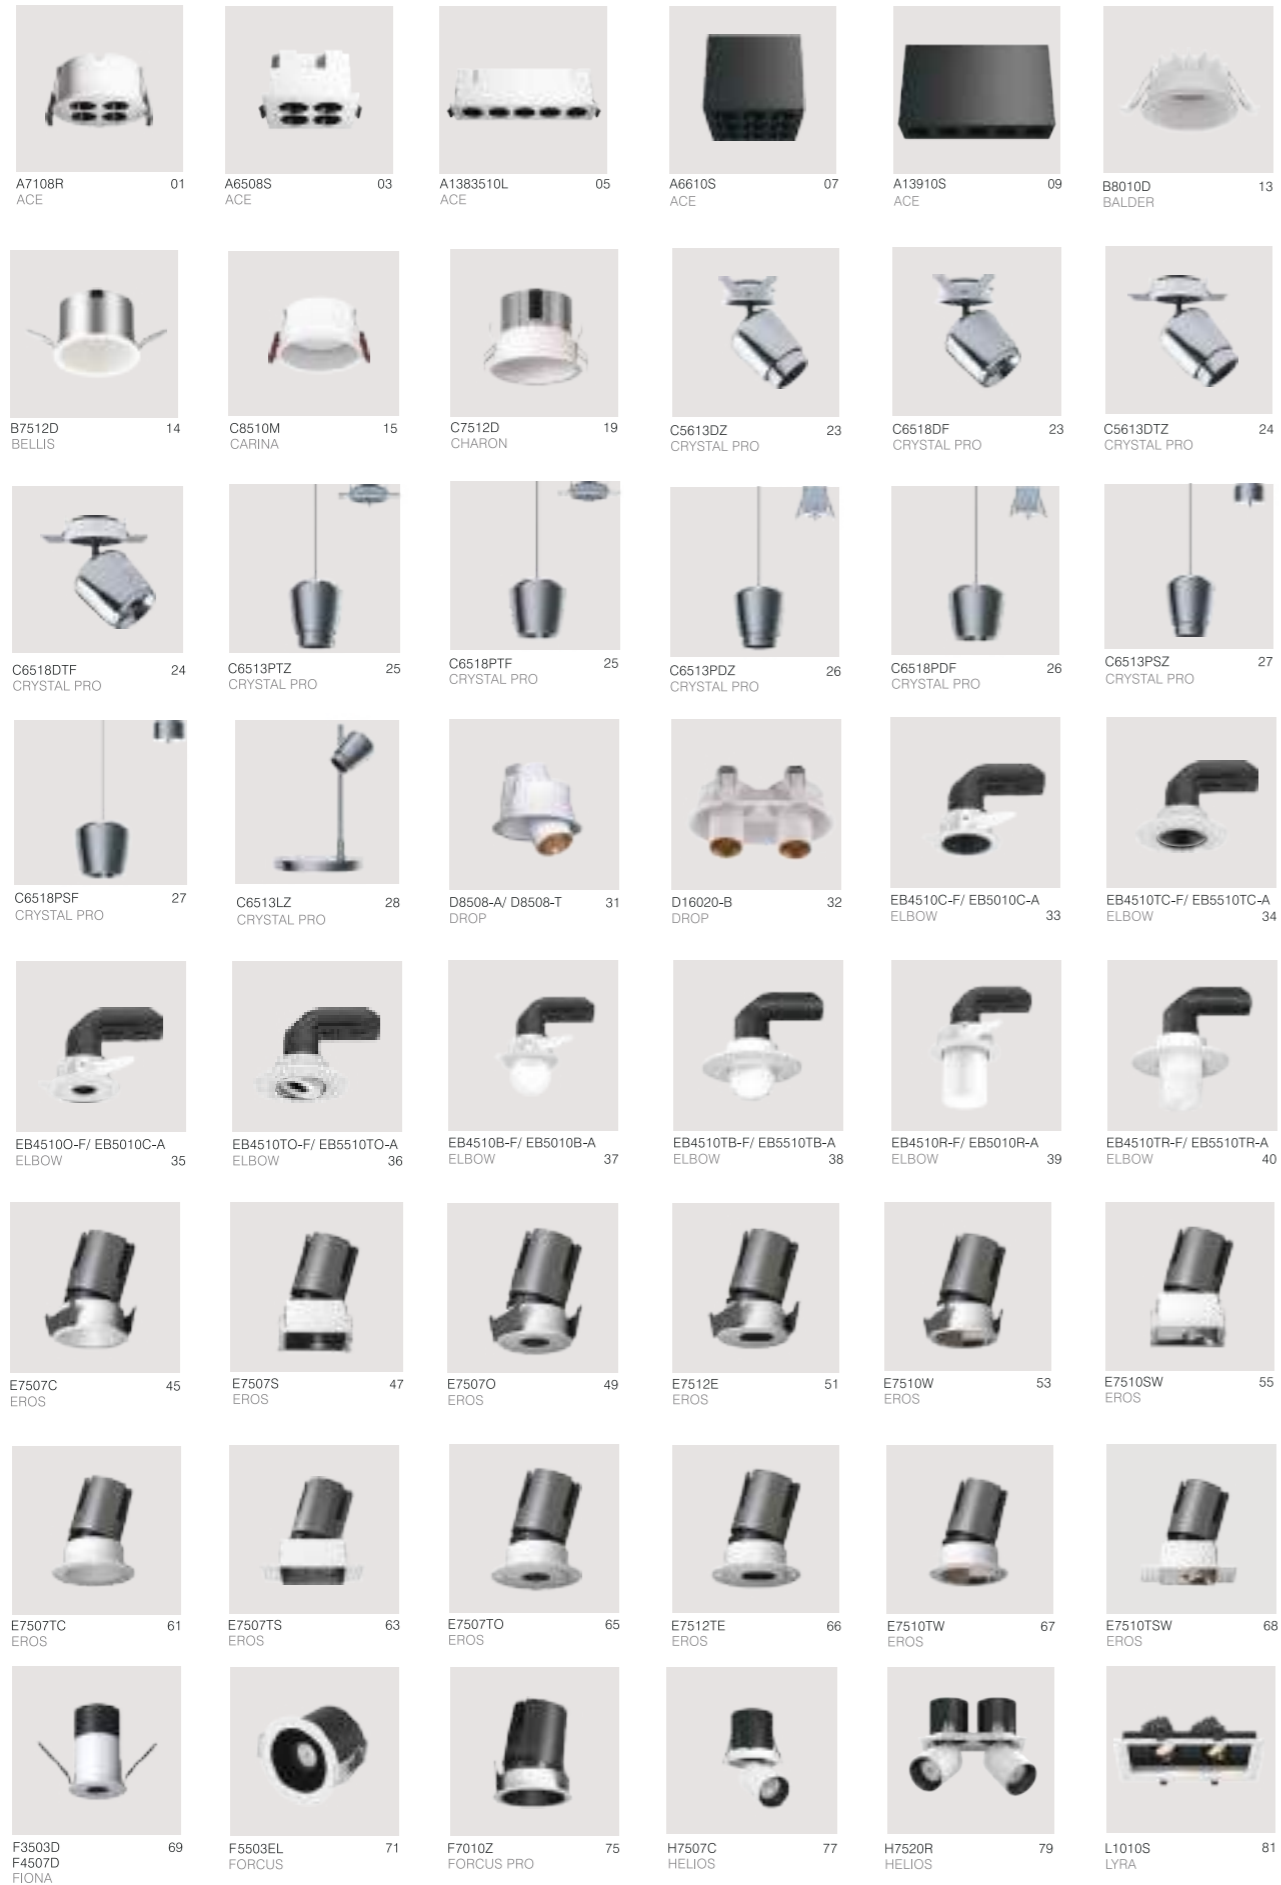

Recessed Ceiling

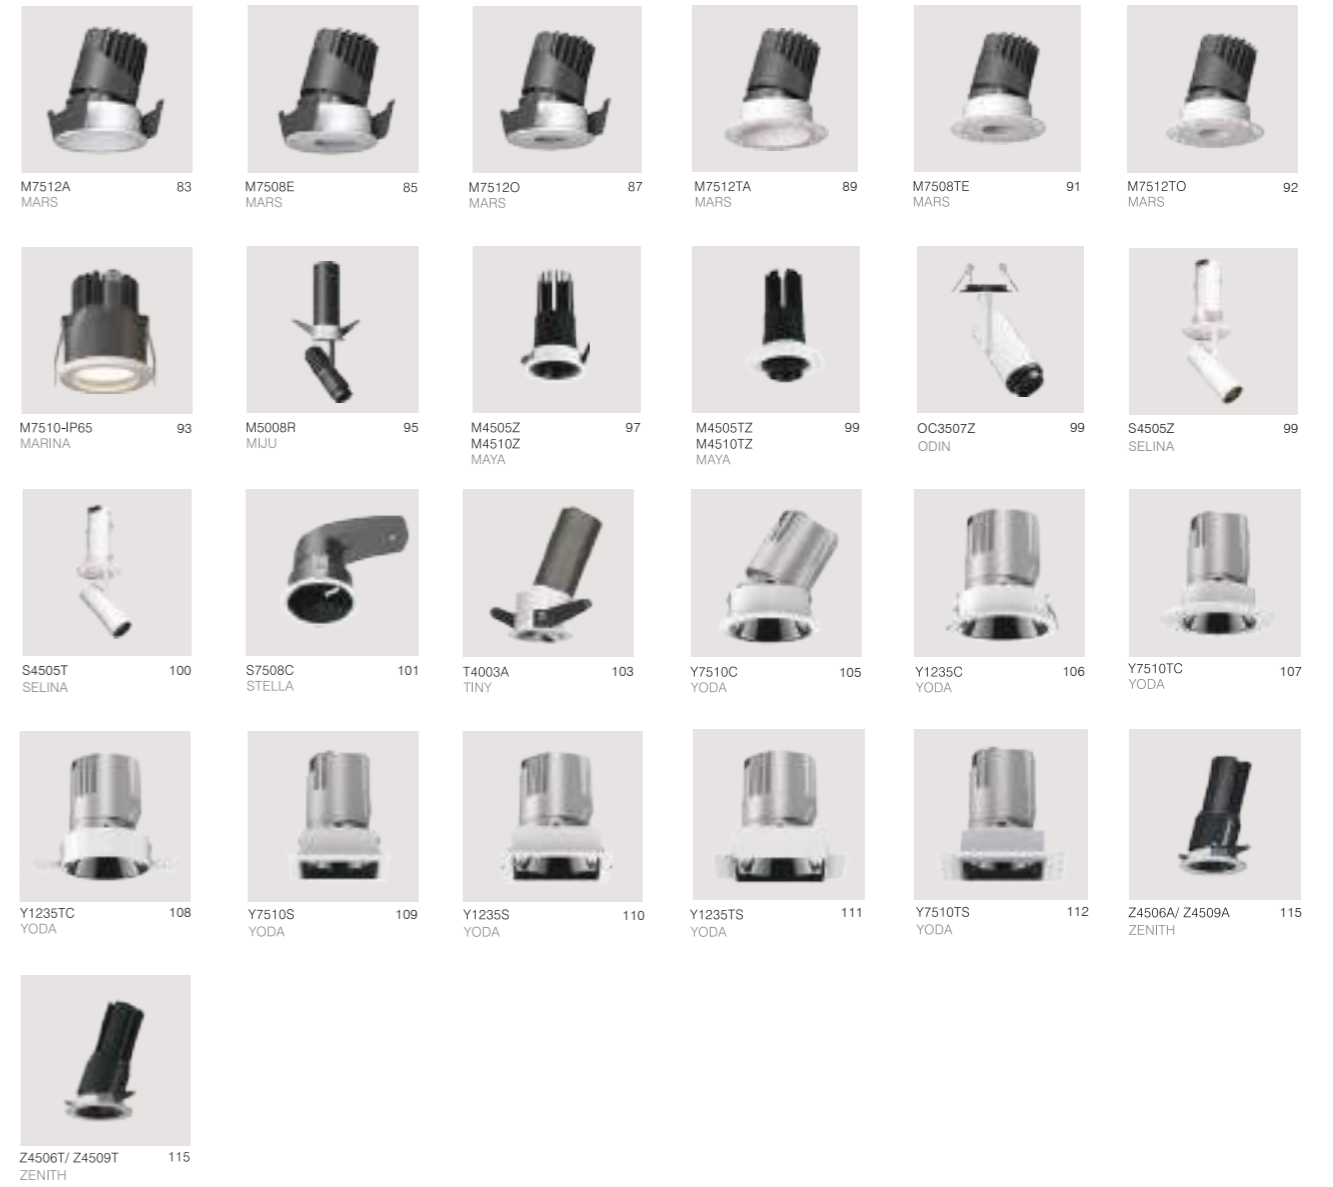


Surface

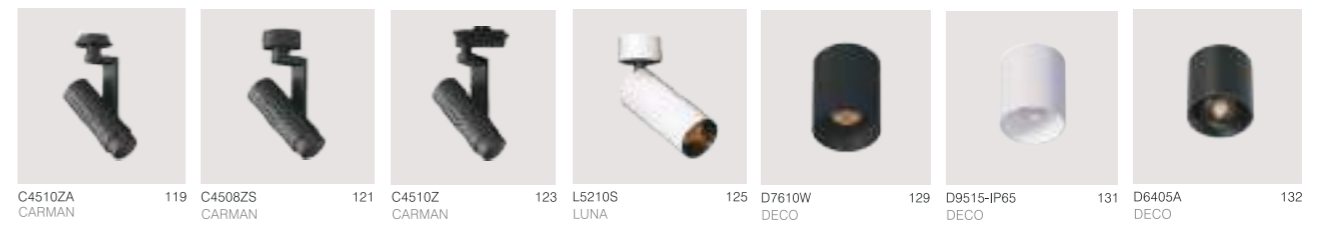


Step Light



Aluminum LED Profile

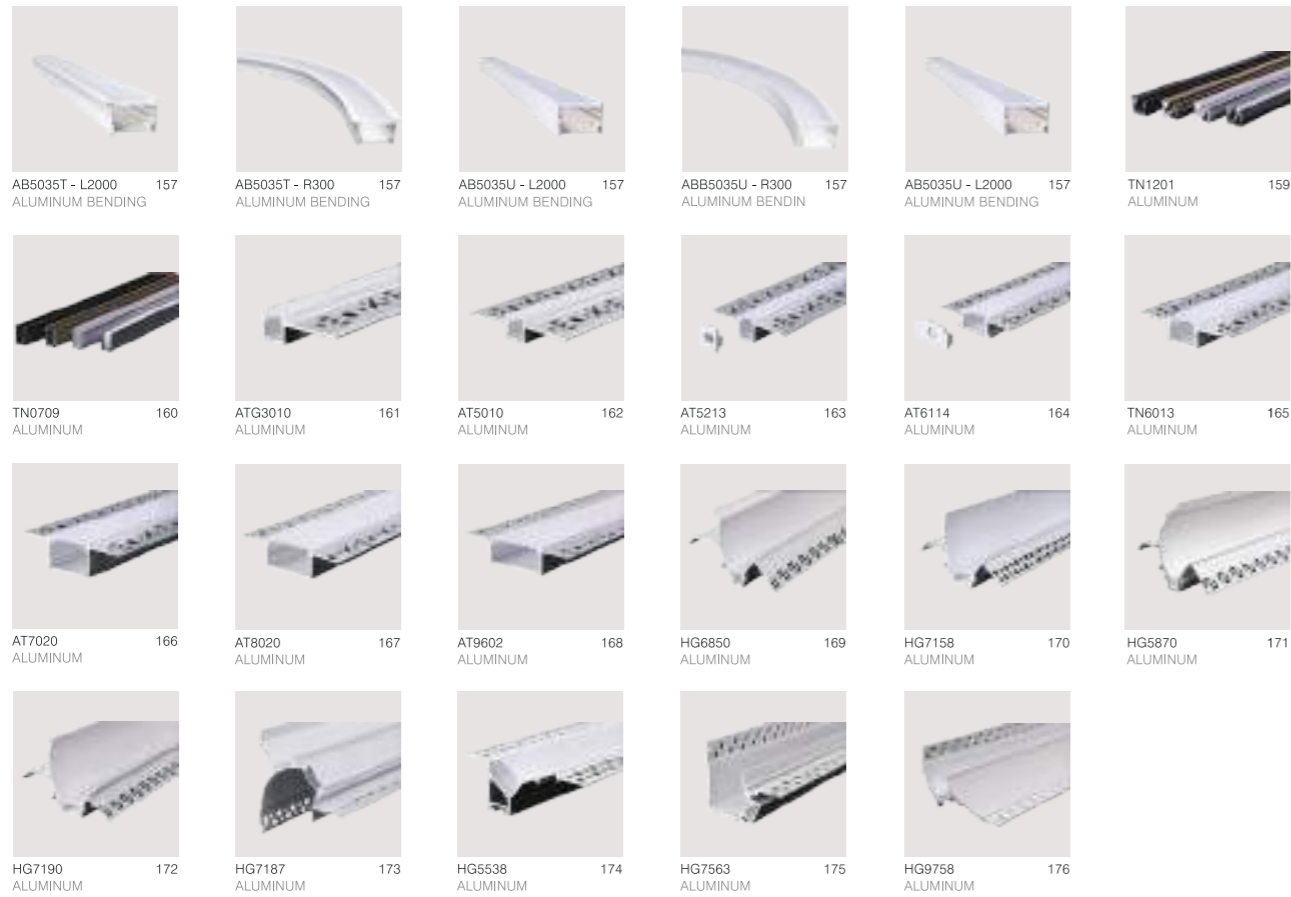

Art Track Light

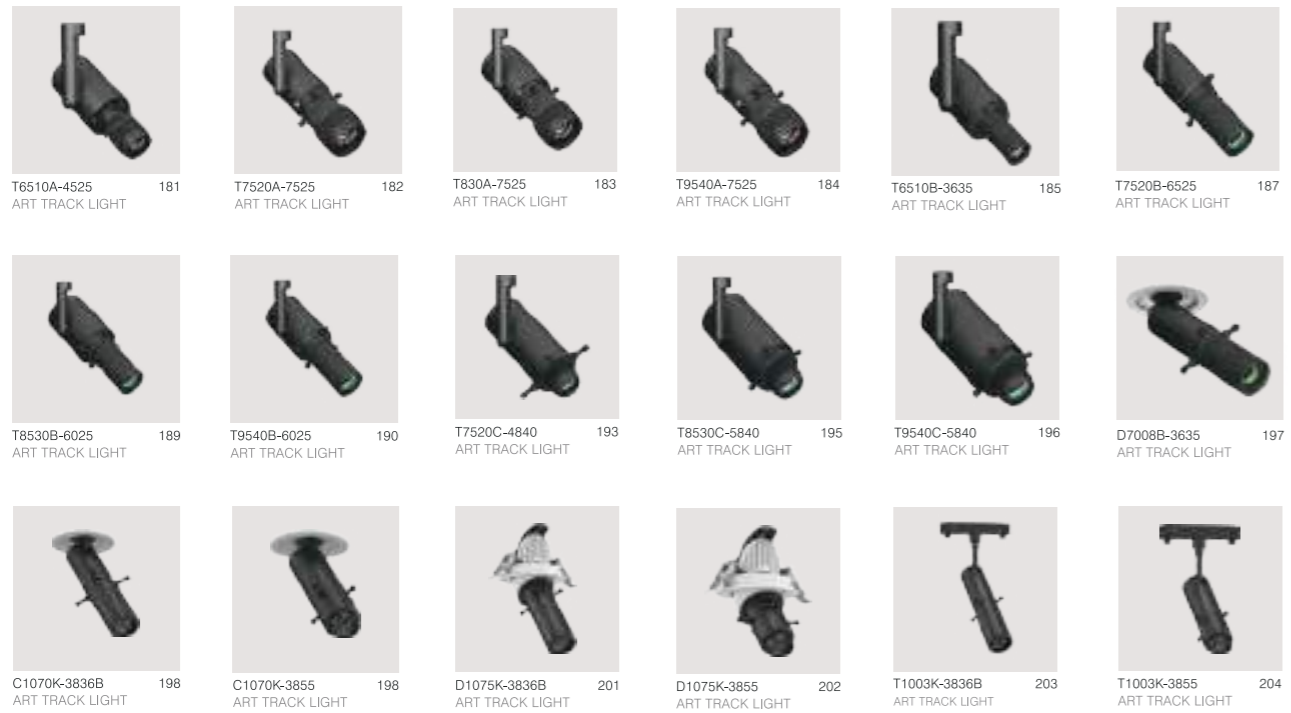


Display Light




Display Light



Magnetic Track

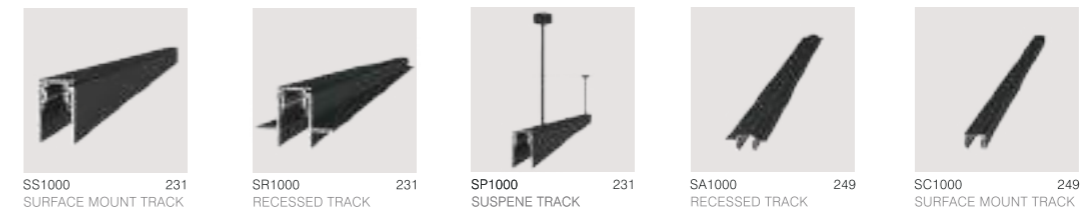

Magnetic Track Light

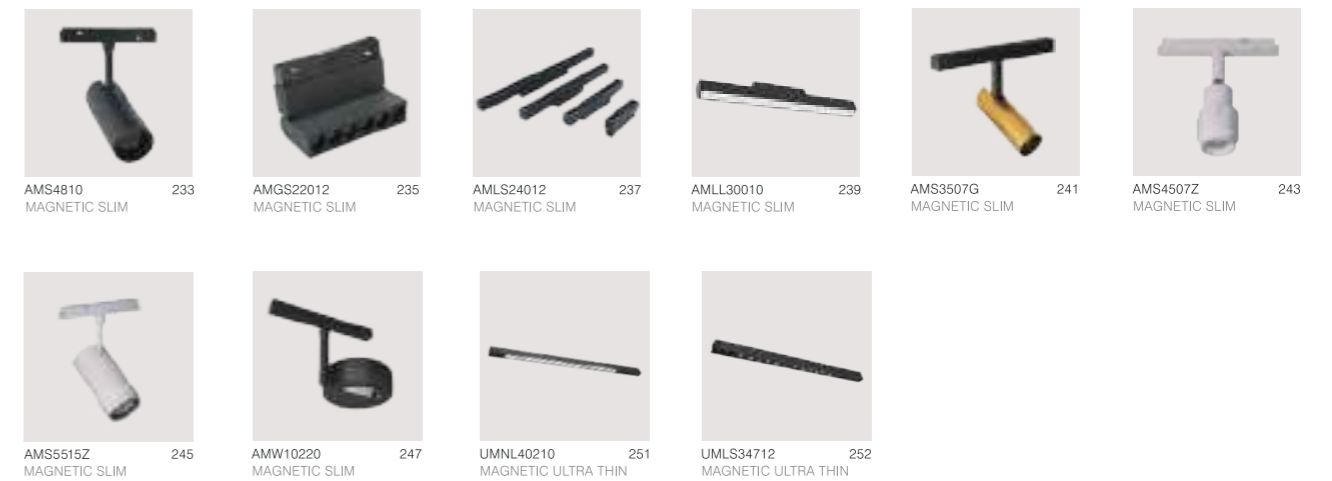


Track Light



T5 LED Tube




LED Wall Washer + Neon Strip

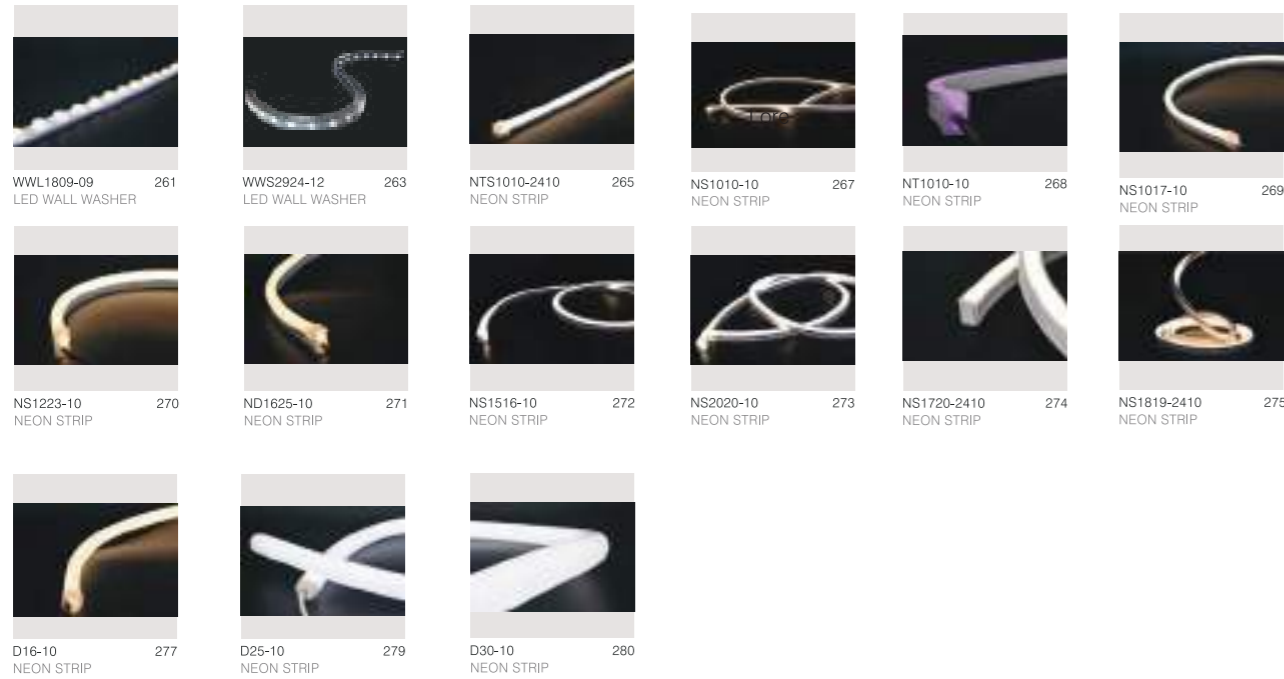

LED Strip



Decorate

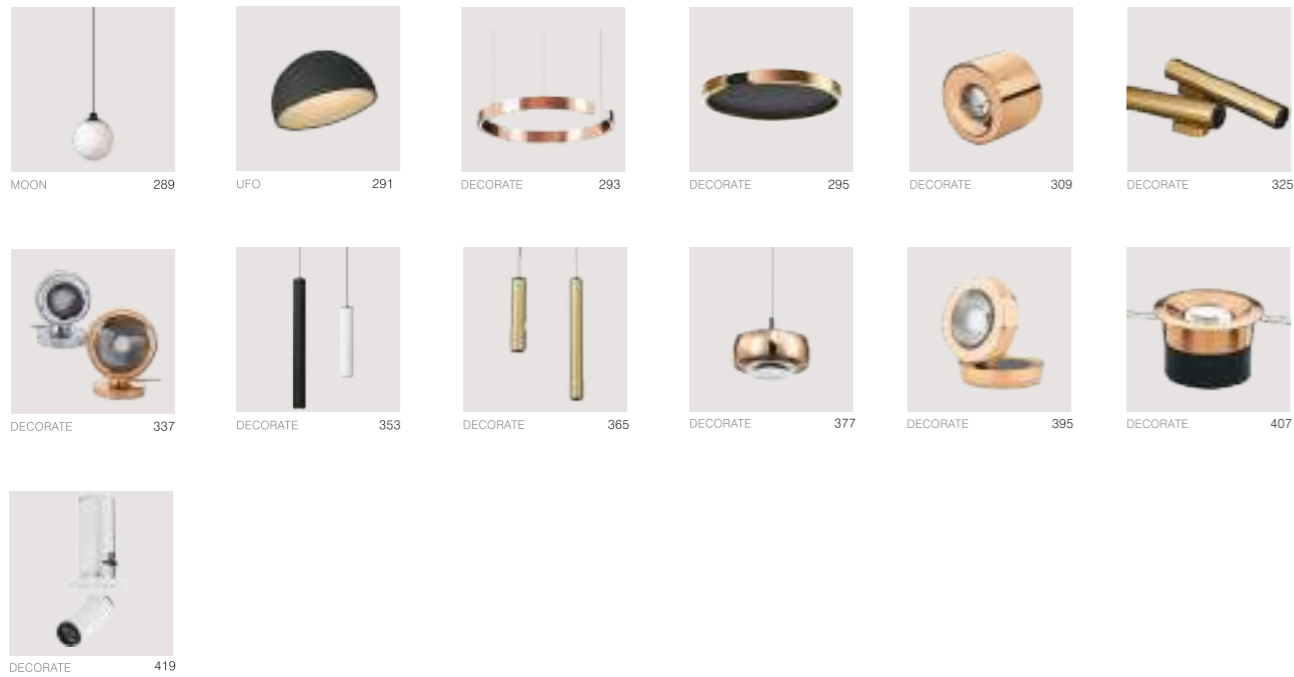


OUTDOOR

Flood Light



Flood Light

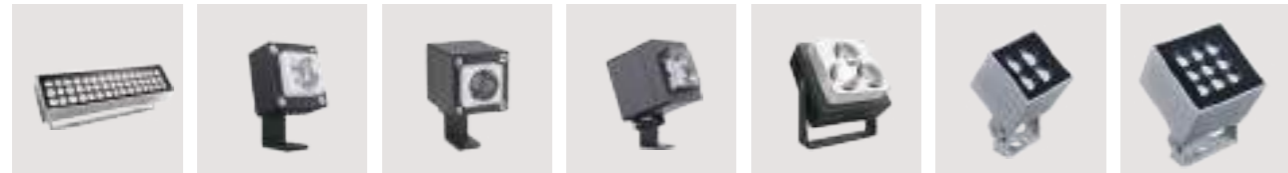

FL663180-45LT 494 FLOOD LIGHT
 FL4030-03RL 495 FLOOD LIGHT
 FL4054-03RL 496 FLOOD LIGHT
 FL5966-08RL 499 FLOOD LIGHT
 FL10003-12RL 501 FLOOD LIGHT
 FL7008-4LD 503 FLOOD LIGHT
 FL11018-9LD 504 FLOOD LIGHT




FL13530-16LD 505 FLOOD LIGHT
 FL16050-25LD 506 FLOOD LIGHT
 FL540-288LT 507 FLOOD LIGHT
 FL663-540LT 508 FLOOD LIGHT
 FL20024-24LD 509 FLOOD LIGHT
 FL27036-36LD 511 FLOOD LIGHT
 FL31054-54LD 512 FLOOD LIGHT

Underwater Light



UW38-1.5LT 515 UNDERWATER LIGHT
 UW55-02SL 515 UNDERWATER LIGHT
 UW69-02SLT 516 UNDERWATER LIGHT
 UW69-02ALT 516 UNDERWATER LIGHT
 UW45-01PL 517 UNDERWATER LIGHT
 UW180-10SL 518 UNDERWATER LIGHT

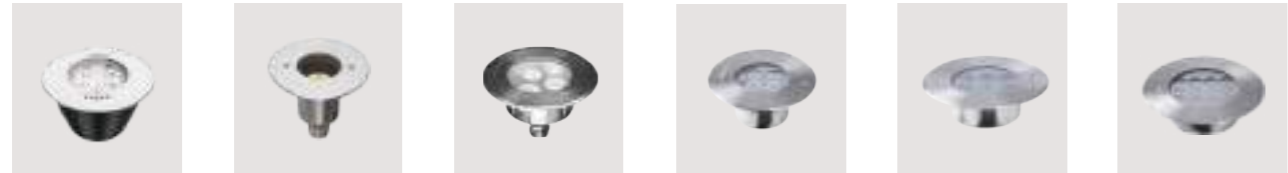

UW145-12SL 518 UNDERWATER LIGHT
 UW98-02LT 519 UNDERWATER LIGHT
 UW118-06LT 520 UNDERWATER LIGHT
 UW135-08LT 521 UNDERWATER LIGHT
 UW180-12LT 522 UNDERWATER LIGHT
 UW205-24LT 523 UNDERWATER LIGHT



UW250-36LT 524 UNDERWATER LIGHT
 UW149-12LT 525 UNDERWATER LIGHT
 UW170-15LT 525 UNDERWATER LIGHT
 UW182A-24LT 526 UNDERWATER LIGHT
 UW200A-24LT 526 UNDERWATER LIGHT
 UW160-18LT 527 UNDERWATER LIGHT



UW115-12LT 528 UNDERWATER LIGHT
 UW115-06SL 529 UNDERWATER LIGHT
 UW140-10SL 529 UNDERWATER LIGHT
 UW153-12LT 531 UNDERWATER LIGHT
 UW153-18LT 532 UNDERWATER LIGHT
 UW180-24LT 533 UNDERWATER LIGHT




UW220-42LT 534 UNDERWATER LIGHT
 UW113A-06LT 535 UNDERWATER LIGHT
 UW113B-06LT 536 UNDERWATER LIGHT
 UW190-18LD 537 UNDERWATER LIGHT
 UW230-36LD 538 UNDERWATER LIGHT
 UW224-42LT 539 UNDERWATER LIGHT



UW328-12LT 540 UNDERWATER LIGHT
 UW195-06LT 541 UNDERWATER LIGHT
 UW328-12LT 542 UNDERWATER LIGHT
 UW250-12LT 543 UNDERWATER LIGHT
 UW135-08LT 544 UNDERWATER LIGHT
 UW42-03LT 545 UNDERWATER LIGHT

Underwater Light

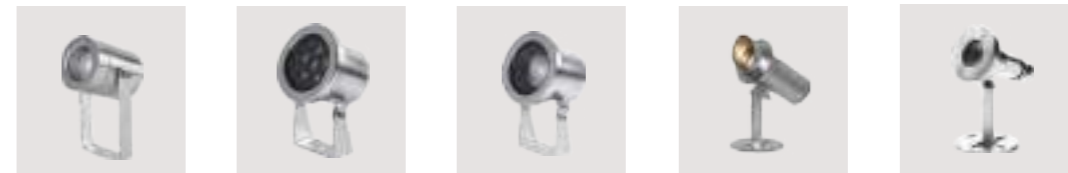

UW65-06LT 546 UNDERWATER LIGHT
 UW70-06LT 547 UNDERWATER LIGHT
 UW95-12LT 548 UNDERWATER LIGHT
 UW60-02LT 549 UNDERWATER LIGHT
 UW61-02LT 550 UNDERWATER LIGHT

Inground Light




IG5501 553 INGROUND LIGHT
 IG5503 553 INGROUND LIGHT
 IG10-0.2LT 554 INGROUND LIGHT
 IG20-0.6LT 554 INGROUND LIGHT
 IG95-03LT 555 INGROUND LIGHT
 IG139-06LT 556 INGROUND LIGHT



IG160-12LT 557 INGROUND LIGHT
 IG180-18LT 558 INGROUND LIGHT
 IG210-24LT 559 INGROUND LIGHT
 IG250-36LT 560 INGROUND LIGHT
 IG280-30SL 561 INGROUND LIGHT
 IG155-10WRL 563 INGROUND LIGHT



IG200-20WRL 565 INGROUND LIGHT
 IG260-30WRL 566 INGROUND LIGHT
 IG200-18RL 567 INGROUND LIGHT
 IG250-30RL 569 INGROUND LIGHT
 IG320-48SL 570 INGROUND LIGHT
 IG55-02AL 573 INGROUND LIGHT

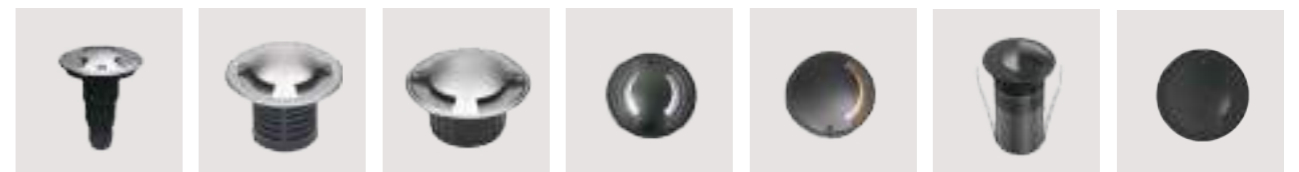


IG70-01AL 574 INGROUND LIGHT
 IG116-02AL 575 INGROUND LIGHT
 IG173-05AL 576 INGROUND LIGHT
 IG116-01AL 577 INGROUND LIGHT
 IG328-12AL 578 INGROUND LIGHT
 IG44-02AL 579 INGROUND LIGHT
 IG120-01AL 580 INGROUND LIGHT




IG98-18RL 581 INGROUND LIGHT
 IG90-36RL 582 INGROUND LIGHT
 IG30-10RL 583 INGROUND LIGHT
 IG50-18RL 584 INGROUND LIGHT
 IG67-18LD 585 INGROUND LIGHT
 IG43-18LD 586 INGROUND LIGHT
 IG90-36LD 587 INGROUND LIGHT

Linear Light

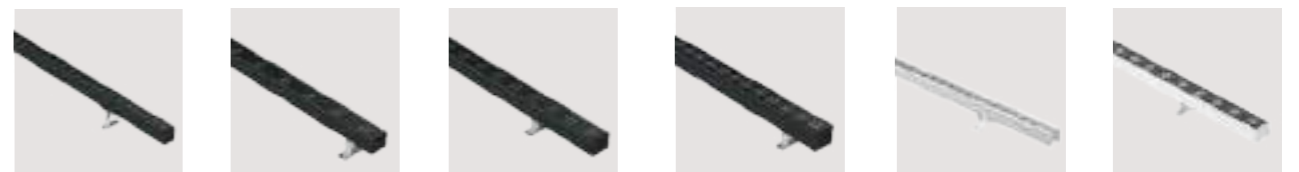

LN24-12RL 591 LINEAR LIGHT
 LN33-18RL 592 LINEAR LIGHT
 LN38-24RL 593 LINEAR LIGHT
 LN65-48RL 594 LINEAR LIGHT
 LN22-12RL 595 LINEAR LIGHT
 LN30-24RL 596 LINEAR LIGHT

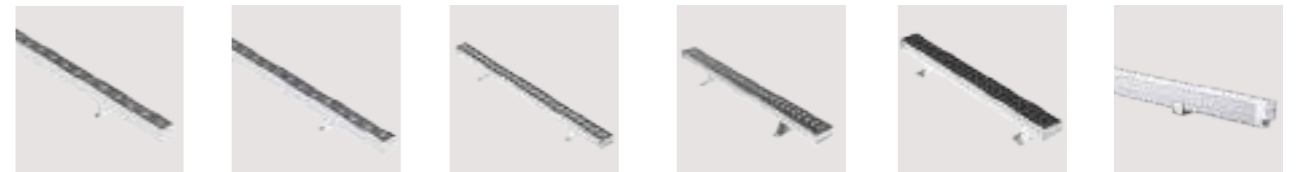

LN42-36RL 597 LINEAR LIGHT
 LN56-60RL 598 LINEAR LIGHT
 LN66-60RL 599 LINEAR LIGHT
 LN90-120RL 600 LINEAR LIGHT
 LN100-120RL 601 LINEAR LIGHT
 LN15-48RL 602 LINEAR LIGHT

Linear Light



Garden Light




Bollard



Wall Light



Window Light

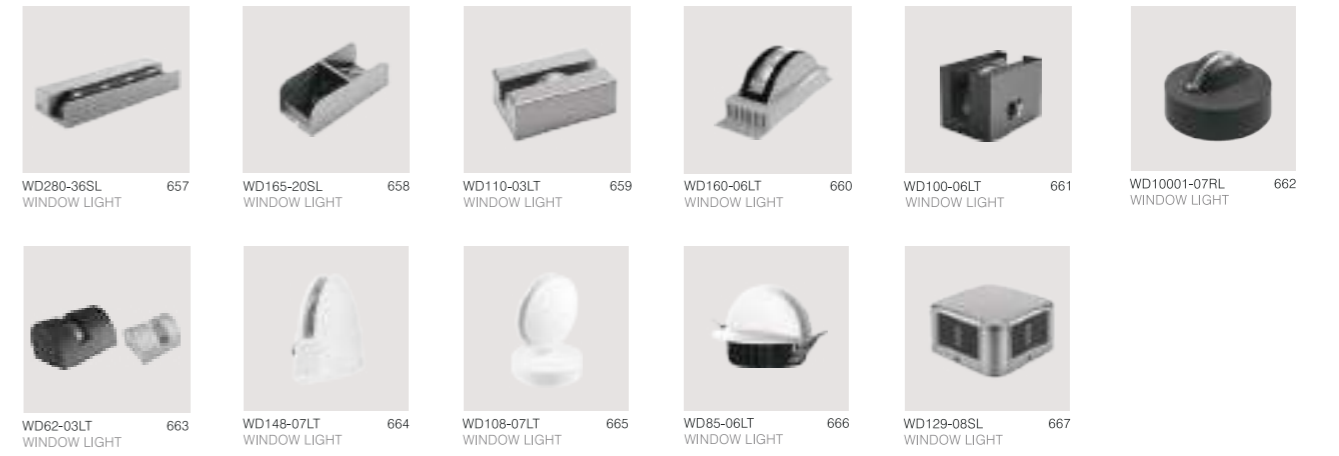

Pixel Light



LED Tube



Control System





Body color

Matt Black

Matt White

Reflector color


Matt White

Matt Black



RECESSED CEILING

Model:	A7108R
Power:	2x4W
Luminous:	560lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

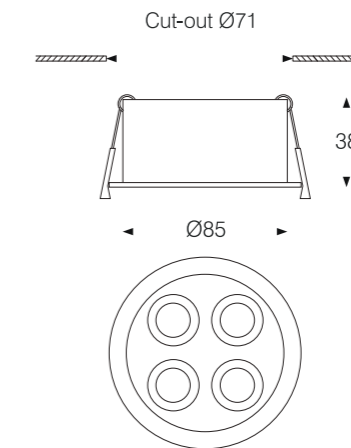

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

● Matt Black

○ Matt White

Reflector color





○ Matt White/ Shiny White

● Matt Black/ Shiny Black



RECESSED CEILING

Model:	A6508S	A9818S
Power:	8W	18W
Luminous:	560lm	1260lm
Beam angle:	24°/ 36°	
Dimensions:		

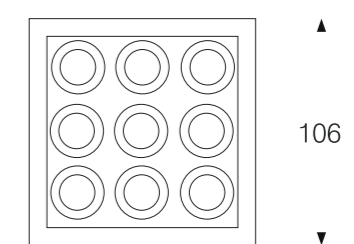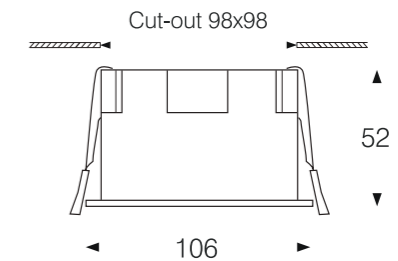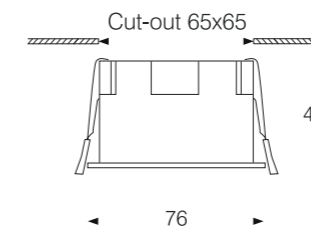

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White/ Shiny White


● Matt Black/ Shiny Black



RECESSED CEILING

Model:	A353502L	A653504L	A953506L	A1383510L	A2804520L
Power:	2W	2x2W	3x2W	5x2W	10x2W
Luminous:	150lm	300lm	450lm	750lm	1500lm
Beam angle:	15°/ 24°/ 36°				

Dimensions:

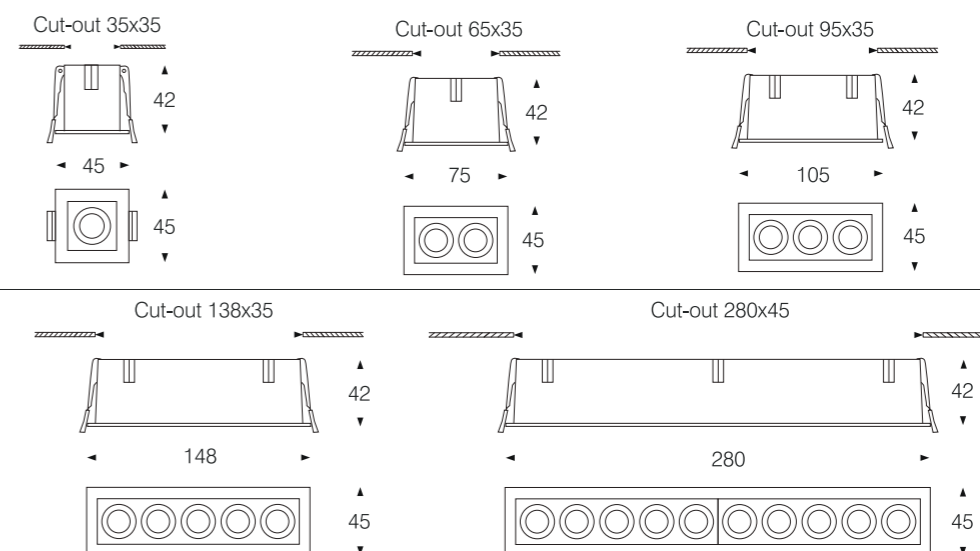

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt Black

Matt White

Reflector color



Matt White/ Shiny White

Matt Black/ Shiny Black



SURFACE

Model:	A6610S	A9618S
Power:	10W	18W
Luminous:	700lm	1350lm
Beam angle:	24°/ 36°	
Dimensions:		

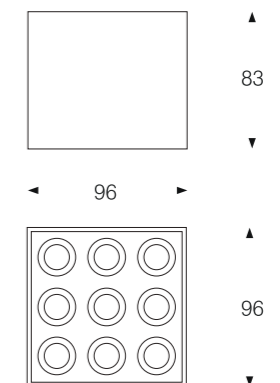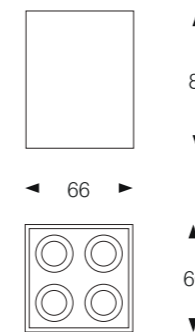

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt Black

Matt White

Reflector color


Matt White/ Shiny White

Matt Black/ Shiny Black



SURFACE

Model:	A13910S
Power:	10W
Luminous:	700lm
Beam angle:	24°/ 36°
Dimensions:	

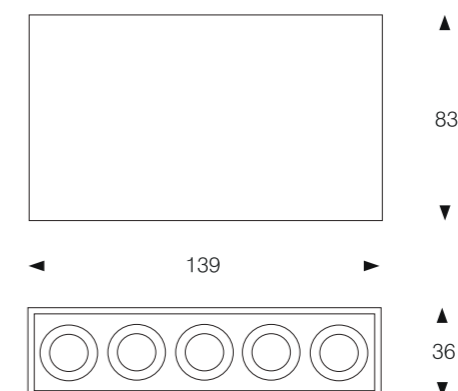

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

BALDER

- The slim lamp body size is only 49mm, suitable for locations with low ceilings
- Optional with 4 Beam angle:s: 15 °-24°-40°-60°
- High Color rendering index (CRI>95)
- IP44 is suitable for areas with high humidity
- Control device options: On/Off, Triac, 0-10V, Dali




- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



RECESSED CEILING

Model:	B8010D
Power:	10W
Luminious:	750lm
Beam angle:	24°/40°
Dimensions:	

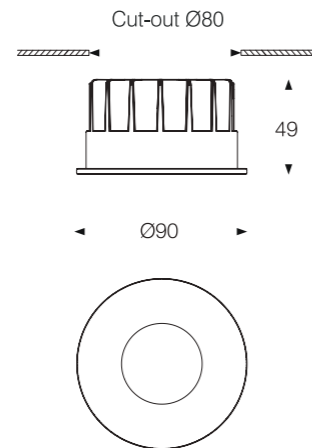

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

- Body color
- Metal Grey
- Reflector color
- Matt White
 - Matt Black/ Shiny Black



RECESSED CEILING

Model:	B5506D	B7512D	B9518D
Power:	6W	12W	18W
Luminious:	480lm	960lm	1440lm
Beam angle:	24°/ 40°/ 55°		
Dimensions:			

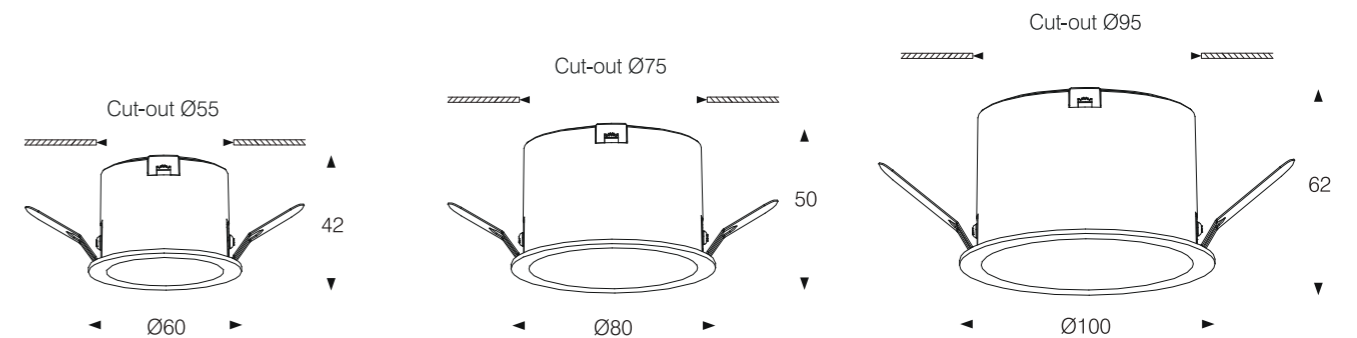

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color


Matt White

Reflector color

Matt White

RECESSED CEILING

Model:	C5505M	C7507M	C8510M	C9520M
Power:	5W	7W	10W	20W
Luminous:	375lm	525lm	750lm	1500lm
Beam angle:	60°			
Dimensions:				

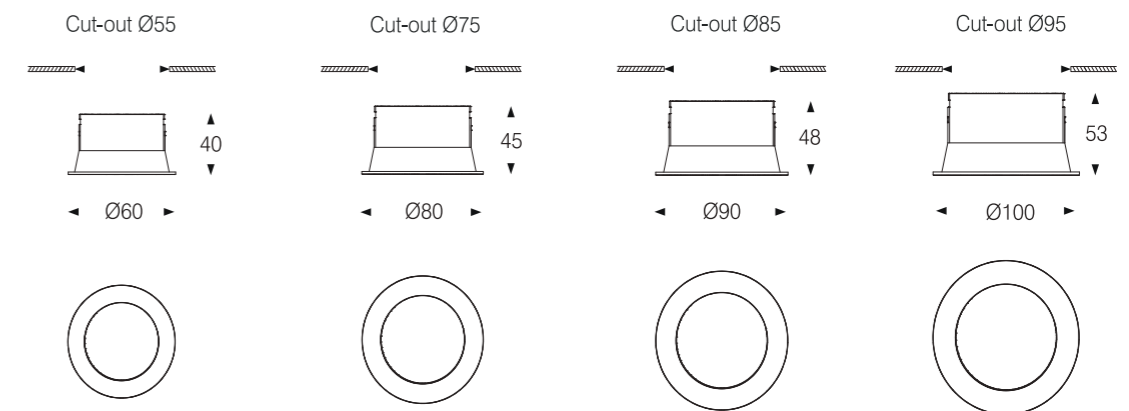

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

ULTRA-THIN BEZEL DESIGN

Diverse color range to satisfy all your demands.



CHARON

VISUAL COMFORT

Better beam control, more artistic atmosphere



CHARON

Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White


● Matt Black



RECESSED CEILING

Model:	C5507D	C7512D
Power:	7W	12W
Luminous:	525lm	900lm
Beam angle:	15°/ 24°/ 36°	24°/ 36°/ 55°

Dimensions:

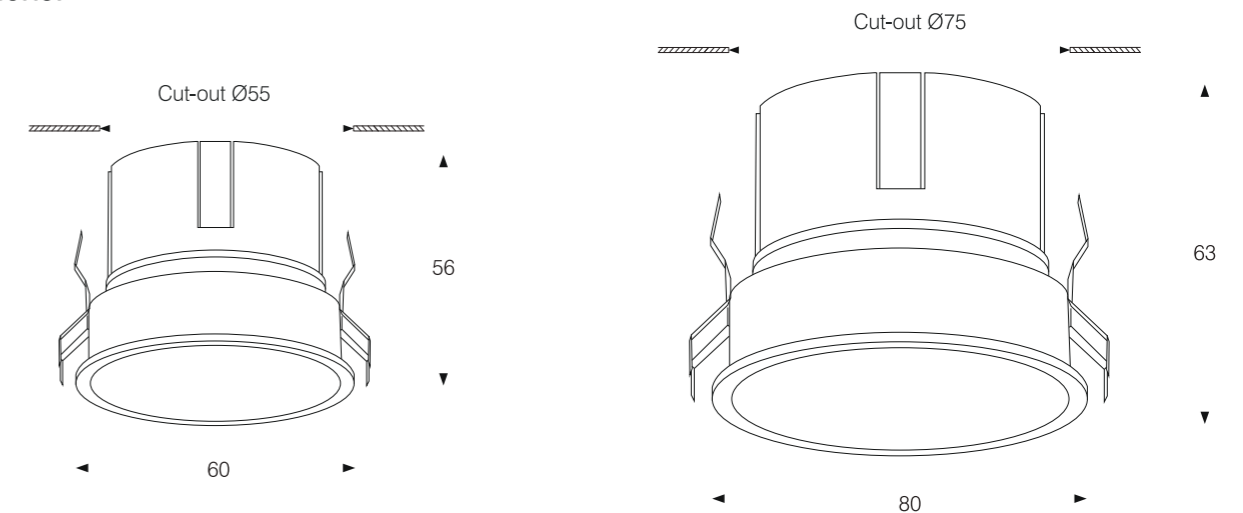

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Fast Connector


Focusing Module



Red

Purple

Green

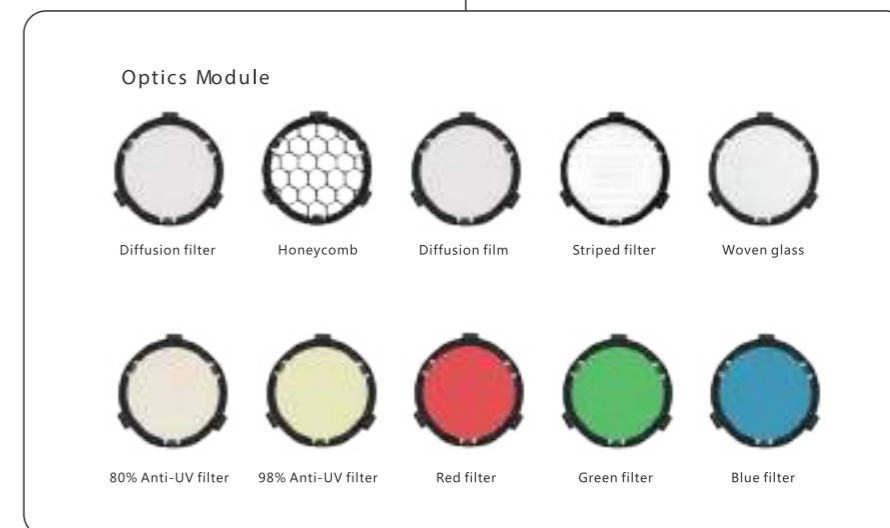

Body color


- Matt White
- Matt Black
- Chrome



RECESSED CEILING

Model:	C5613DZ	C6518DF
Power:	13W	18W
Luminous:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°

Dimensions:

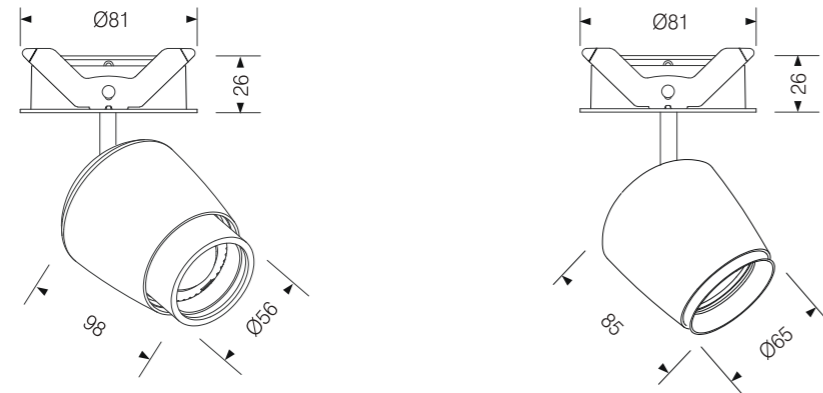


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color


- Matt White
- Matt Black
- Chrome

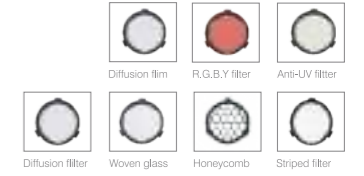

TRIMLESS CEILING

Model:	C5613DTZ	C6518DTF
Power:	13W	18W
Luminous:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/20°/30°/50°

Dimensions:

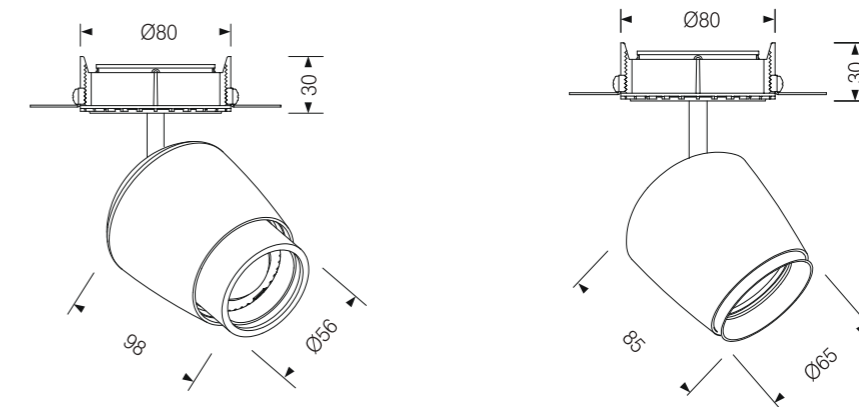

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




Body color

- Matt White
- Matt Black
- Chrome

PENDANT


Model:	C6513PTZ	C6518PTF
Power:	13W	18W
Luminous:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°

Dimensions:

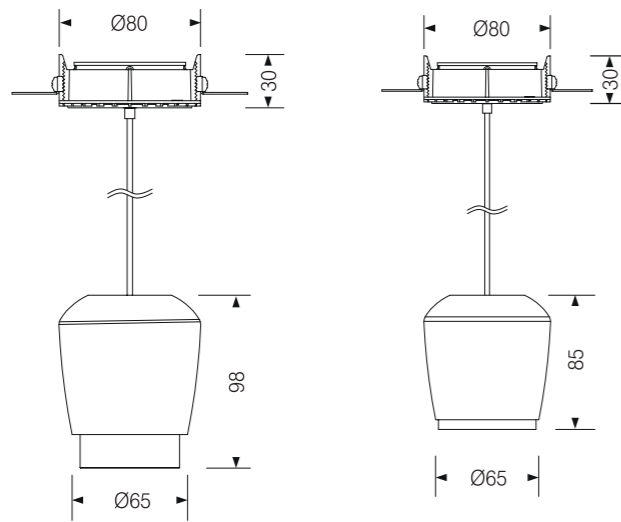

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

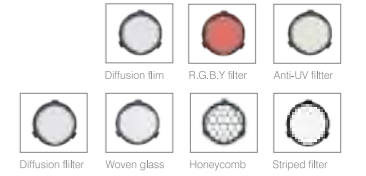


Body color

- Matt White
- Matt Black
- Chrome

PENDANT

Model:	C6513PDZ	C6518PDF
Power:	13W	18W
Luminous:	720lm	720lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°

Dimensions:

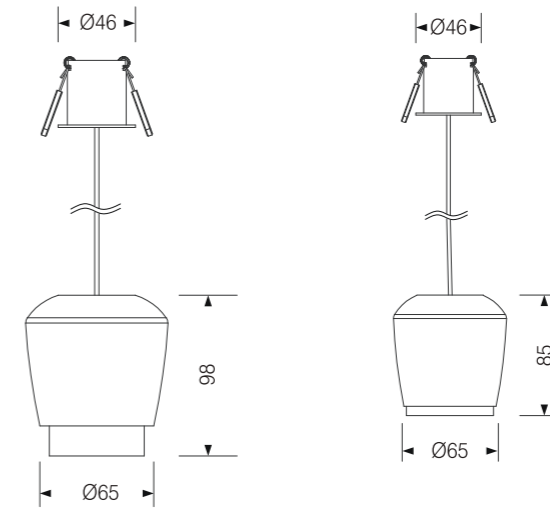

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

CRYSTAL PRO




Body color

- Matt White
- Matt Black
- Chrome

PENDANT

Model:	C6513PSZ	C6518PSF
Power:	13W	18W
Luminous:	720lm	1330lm
Beam angle:	Zoomable 10°-60°	15°/ 20°/ 30°/ 50°

Dimensions:

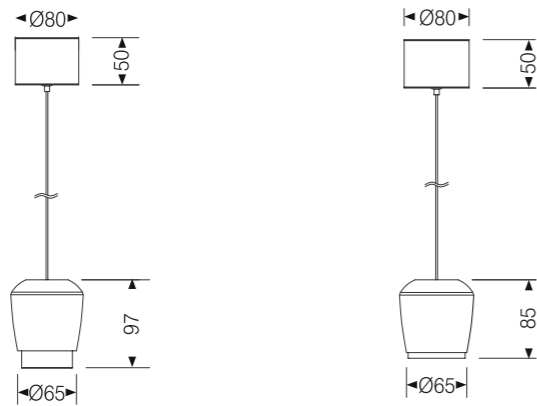

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

CRYSTAL PRO




Body color

- Matt White
- Matt Black
- Chrome

LAMP

Model:	C6513LZ	C6513TZ
Power:	13W	13W
Luminous:	720lm	720lm
Beam angle:	Zoomable 10°-60°	Zoomable 10°-60°

Dimensions:

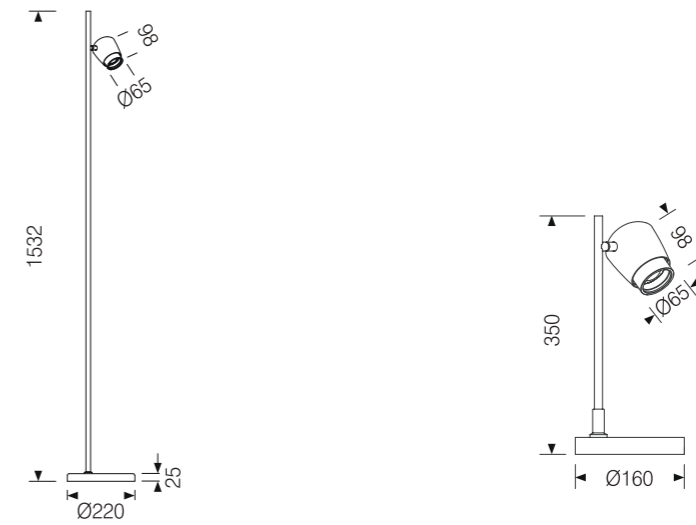

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth, Touch dimming



- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black
 - Glitter Gold




RECESSED CEILING

Model:	D8508-A	D8510-A
Power:	8W	10W
Luminous:	560lm	750lm
Beam angle:	15°/ 24°/ 36°	15°/ 24°/ 36°
Dimensions:		


TRIMLESS CEILING

Model:	D8508-T
Power:	8W
Luminous:	560lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

Cut-out Ø85

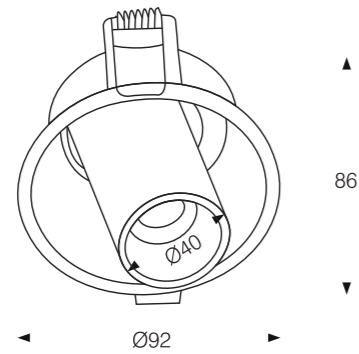

Cut-out Ø95

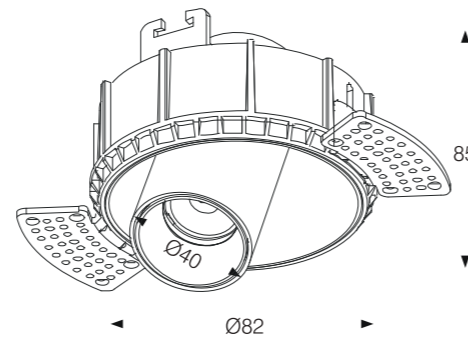

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



RECESSED CEILING

Model:	D16020-B
Power:	2x10W
Luminous:	1700lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

Cut-out Ø160x85

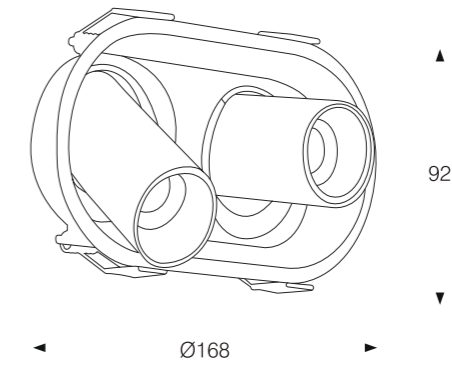

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



RECESSED CEILING

Model:	EB4510C-F	EB5010C-A
Power:	10W	10W
Luminous:	787lm	787lm
Beam angle:	15° / 24° / 36° / 55°	
Dimensions:		

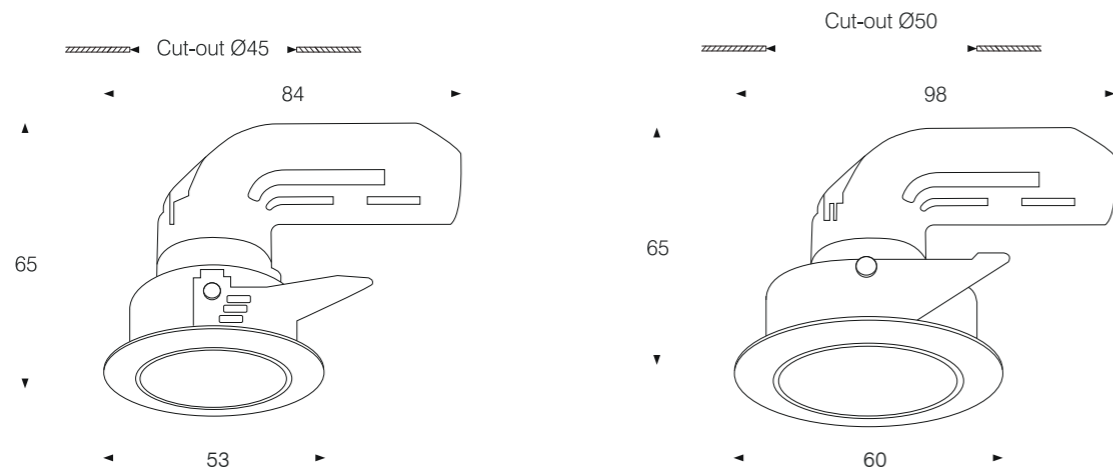

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

- Body color
- Metal Grey
 - Matt White
- Reflector color
- Matt White
 - Matt Black



TRIMLESS CEILING

Model:	EB4510TC-F	EB3503TC-A	EB5510TC-A
Power:	10W	3W	10W
Luminous:	787lm	236lm	787lm
Beam angle:	15° / 24° / 36° / 55°		
Dimensions:			

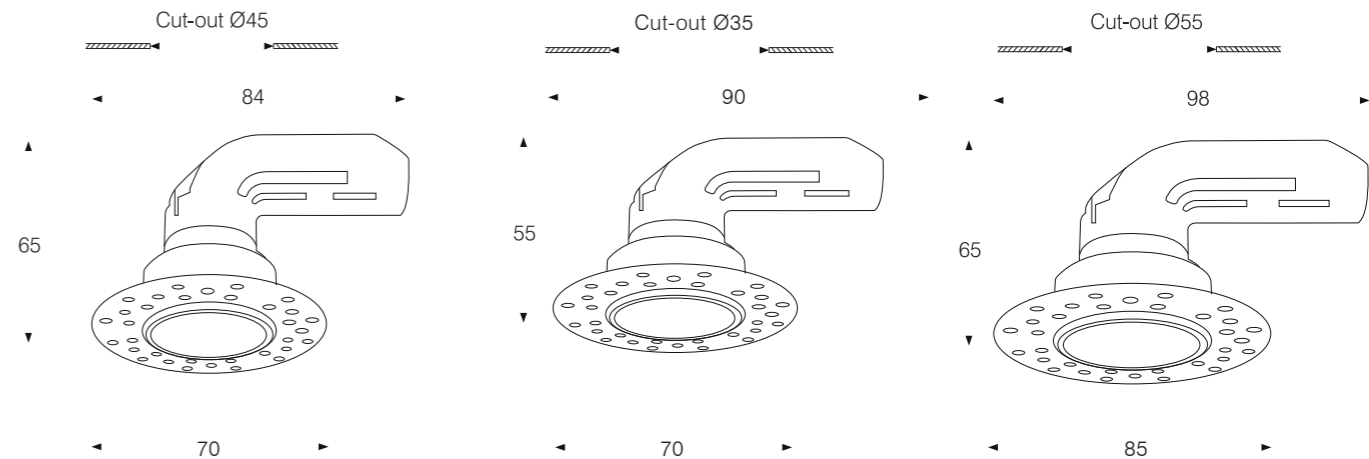

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



RECESSED CEILING

Model:	EB45100-F	EB50100-A
Power:	10W	10W
Luminous:	500lm	500lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

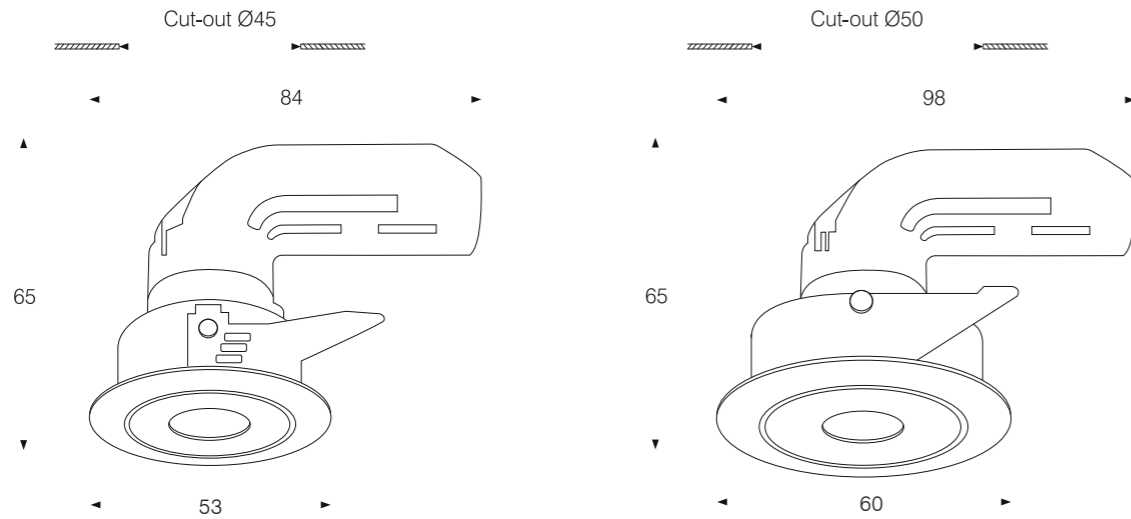

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth


- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



TRIMLESS CEILING

Model:	EB4510TO-F	EB3503TO-A	EB5510TO-A
Power:	10W	3W	10W
Luminous:	500lm	236lm	500lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

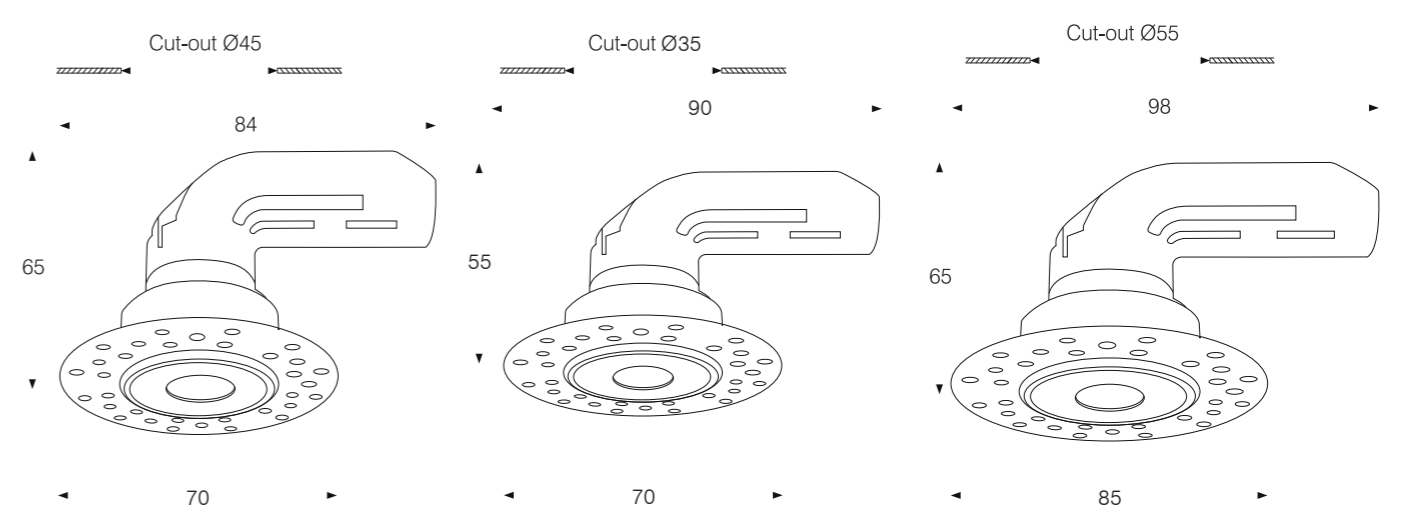

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth


- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



RECESSED CEILING

Model:	EB4510B-F	EB5010B-A
Power:	10W	10W
Luminous:	400lm	400lm

Dimensions:

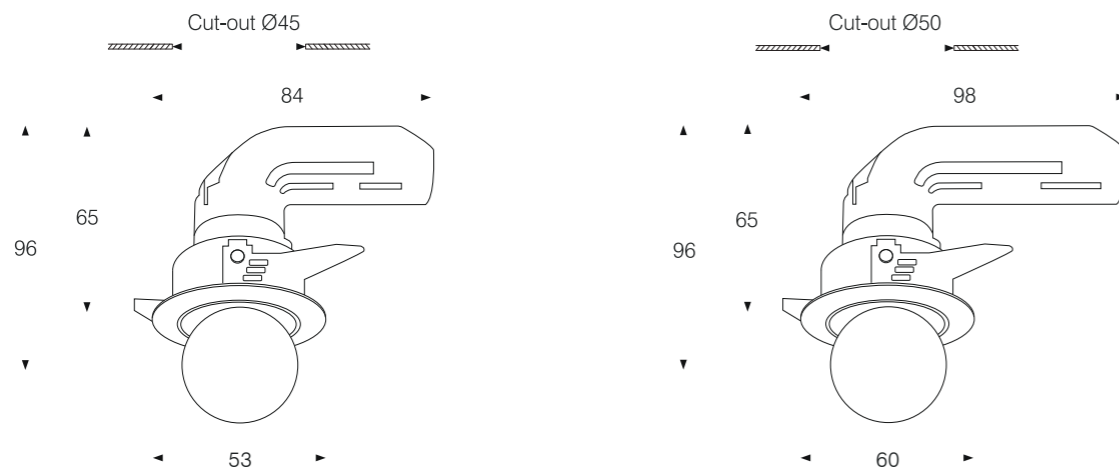

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

- Body color
- Matt Black
 - Matt White
- Reflector color
- Matt White
 - Matt Black



TRIMLESS CEILING

Model:	EB4510TB-F	EB5510TB-A
Power:	10W	10W
Luminous:	400lm	400lm

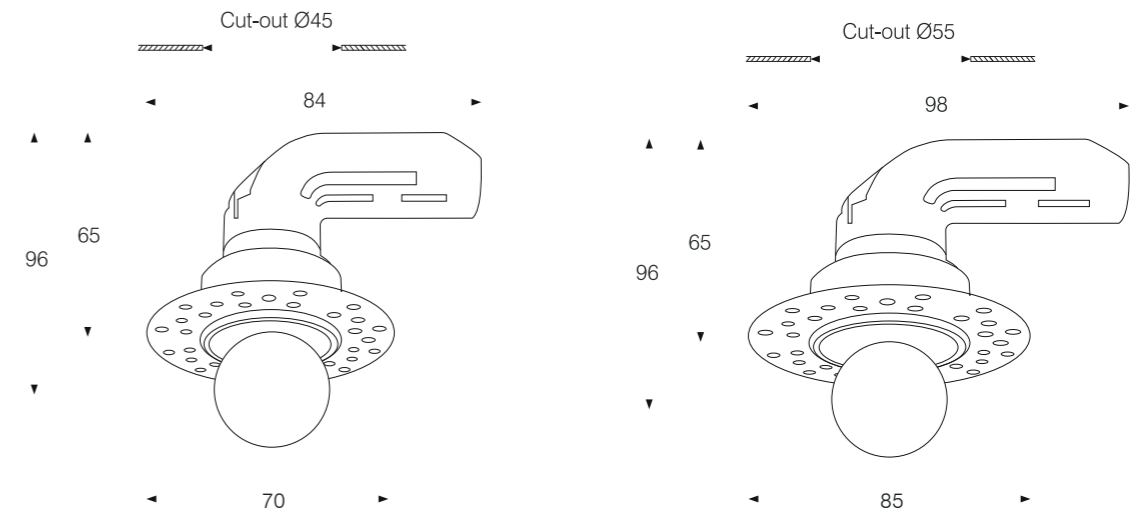

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ELBOW

Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White

● Matt Black




20°

RECESSED CEILING

Model:	EB4510R-F	EB5010R-A
Power:	10W	10W
Luminous:	400lm	400lm

Dimensions:

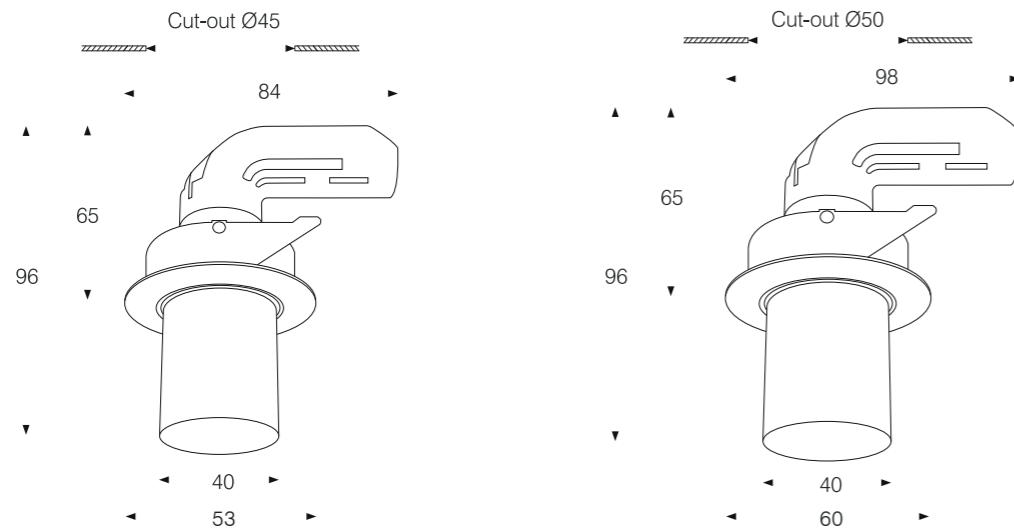

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ELBOW

Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White

● Matt Black




20°

TRIMLESS CEILING

Model:	EB4510TR-F	EB5510TR-A
Power:	10W	10W
Luminous:	400lm	400lm

Dimensions:

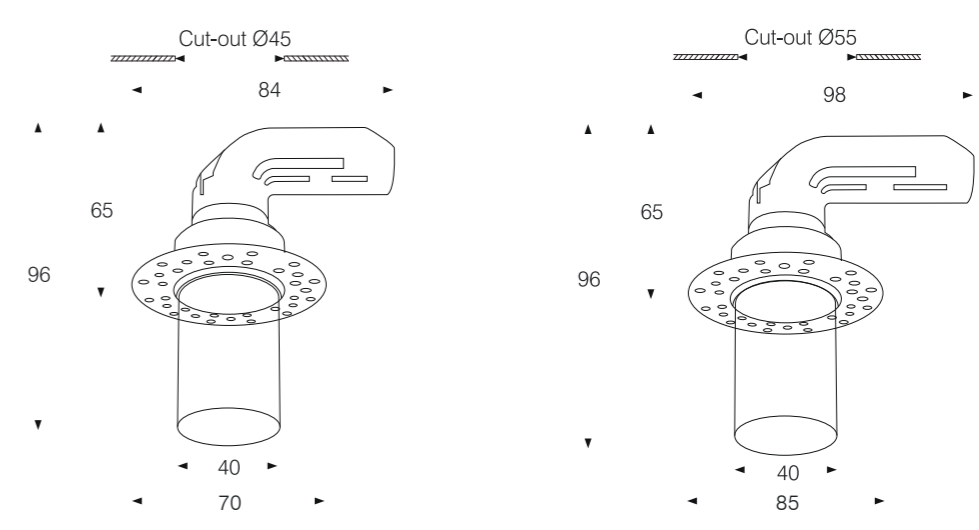

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Bluetooth

ULTRA-THIN BEZEL DESIGN

As a concise, visually striking lighting fixture, the light source has deep anti-glare, precise light control, and can present perfect lighting.

The charm of creating circular light effects






EROS



Tunable White




- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver



RECESSED CEILING

Model:	E7507C	E7512C	E7518C	E9525C
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

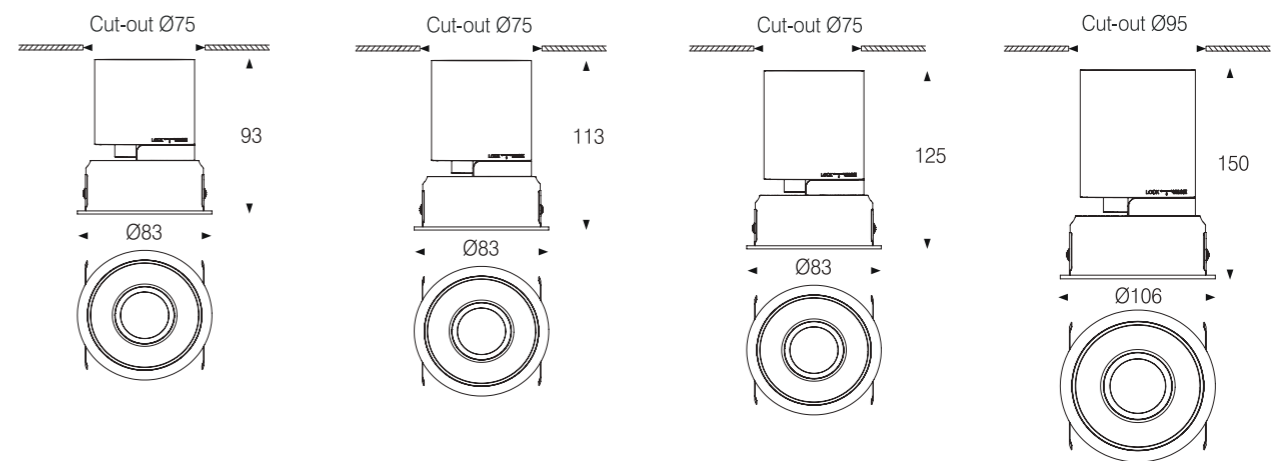

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color


● Metal Grey

Reflector color

○ Matt White/ Shiny White

● Matt Black/ Shiny Black

● Gloss Silver




Honey Comb Frost Strip Grid

RECESSED CEILING

Model:	E7507S	E7512S	E7518S	E9525S
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/24°/36°/55°			

Dimensions:

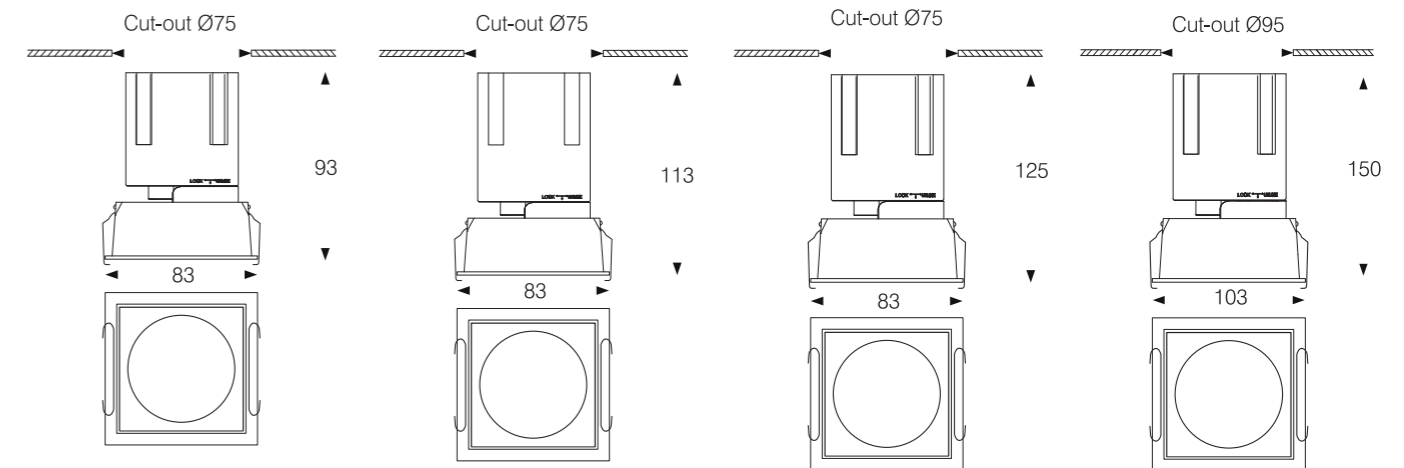

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




- Body color
- Metal Grey
- Reflector color
- Matt White



RECESSED CEILING

Model:	E75070	E75120	E75180	E95250
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1800lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

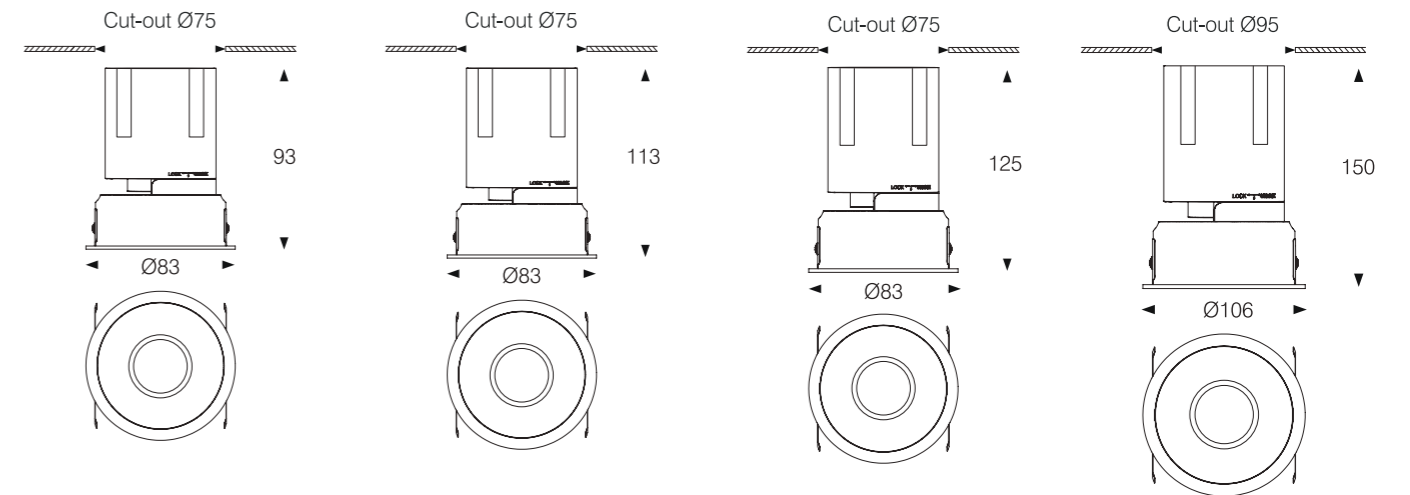

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



- Body color
- Metal Grey
- Reflector color
- Matt White

RECESSED CEILING

Model:	E7507E	E7512E	E7518E
Power:	7W	12W	18W
Luminous:	525lm	900lm	1350lm
Beam angle:	24°/ 36°		
Dimensions:			

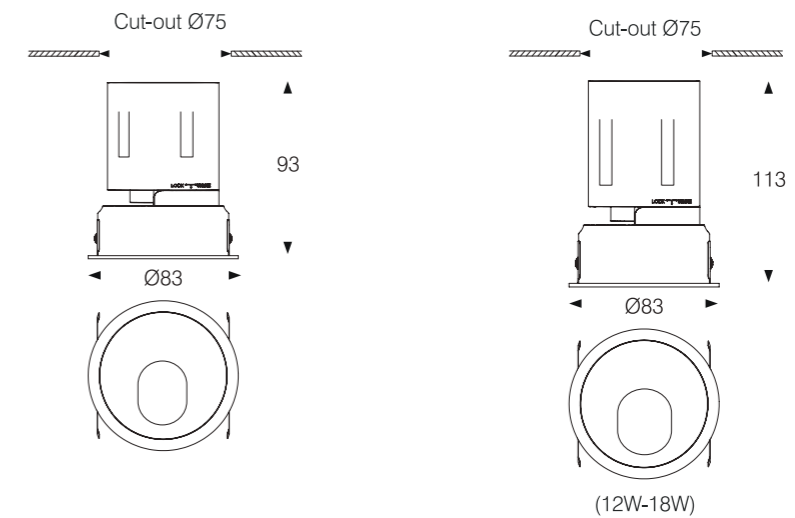

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




- Body color
- Metal Grey
- Reflector color
- Gloss Silver



RECESSED CEILING

Model:	E7510W	E7518W	E9525W
Power:	10W	18W	25W
Luminous:	600lm	1350lm	1875lm
Beam angle:	60°		

Dimensions:

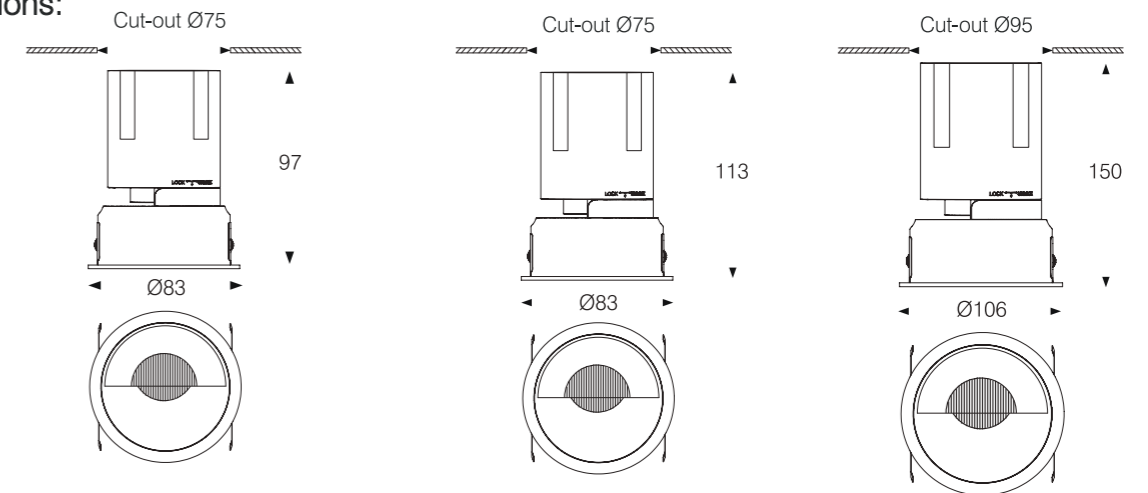

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




- Body color
- Metal Grey
- Reflector color
- Gloss Silver



RECESSED CEILING

Model:	E7510SW	E7518SW	E9525SW
Power:	10W	18W	25W
Luminous:	600lm	1350lm	1825lm
Beam angle:	60°		

Dimensions:

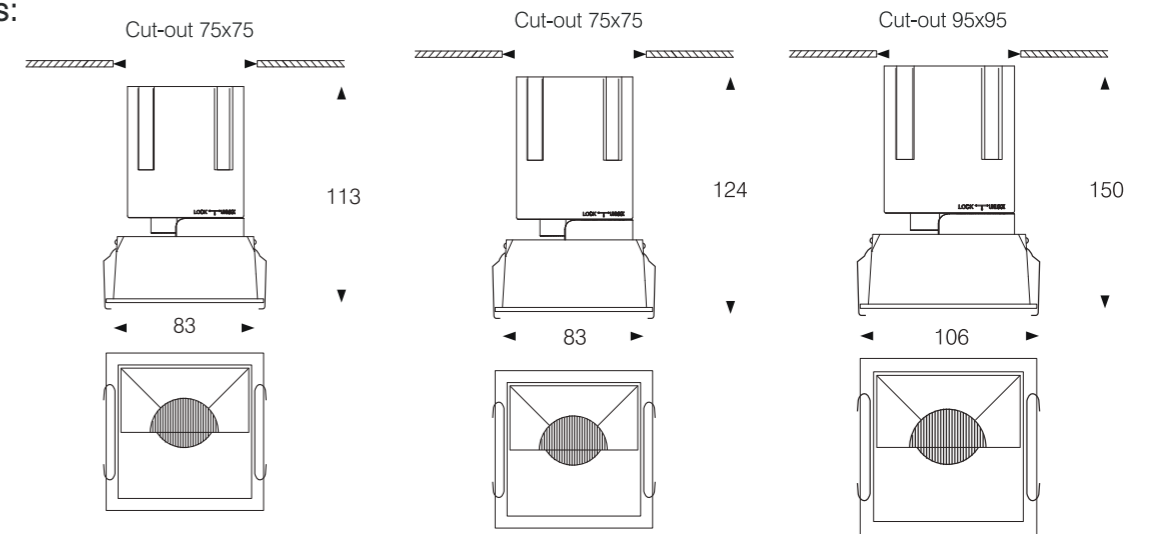


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

EROS TRIMLESS

New design with an edgeless structure beneath the ceiling surface, making the ceiling surface neater and enhancing aesthetics

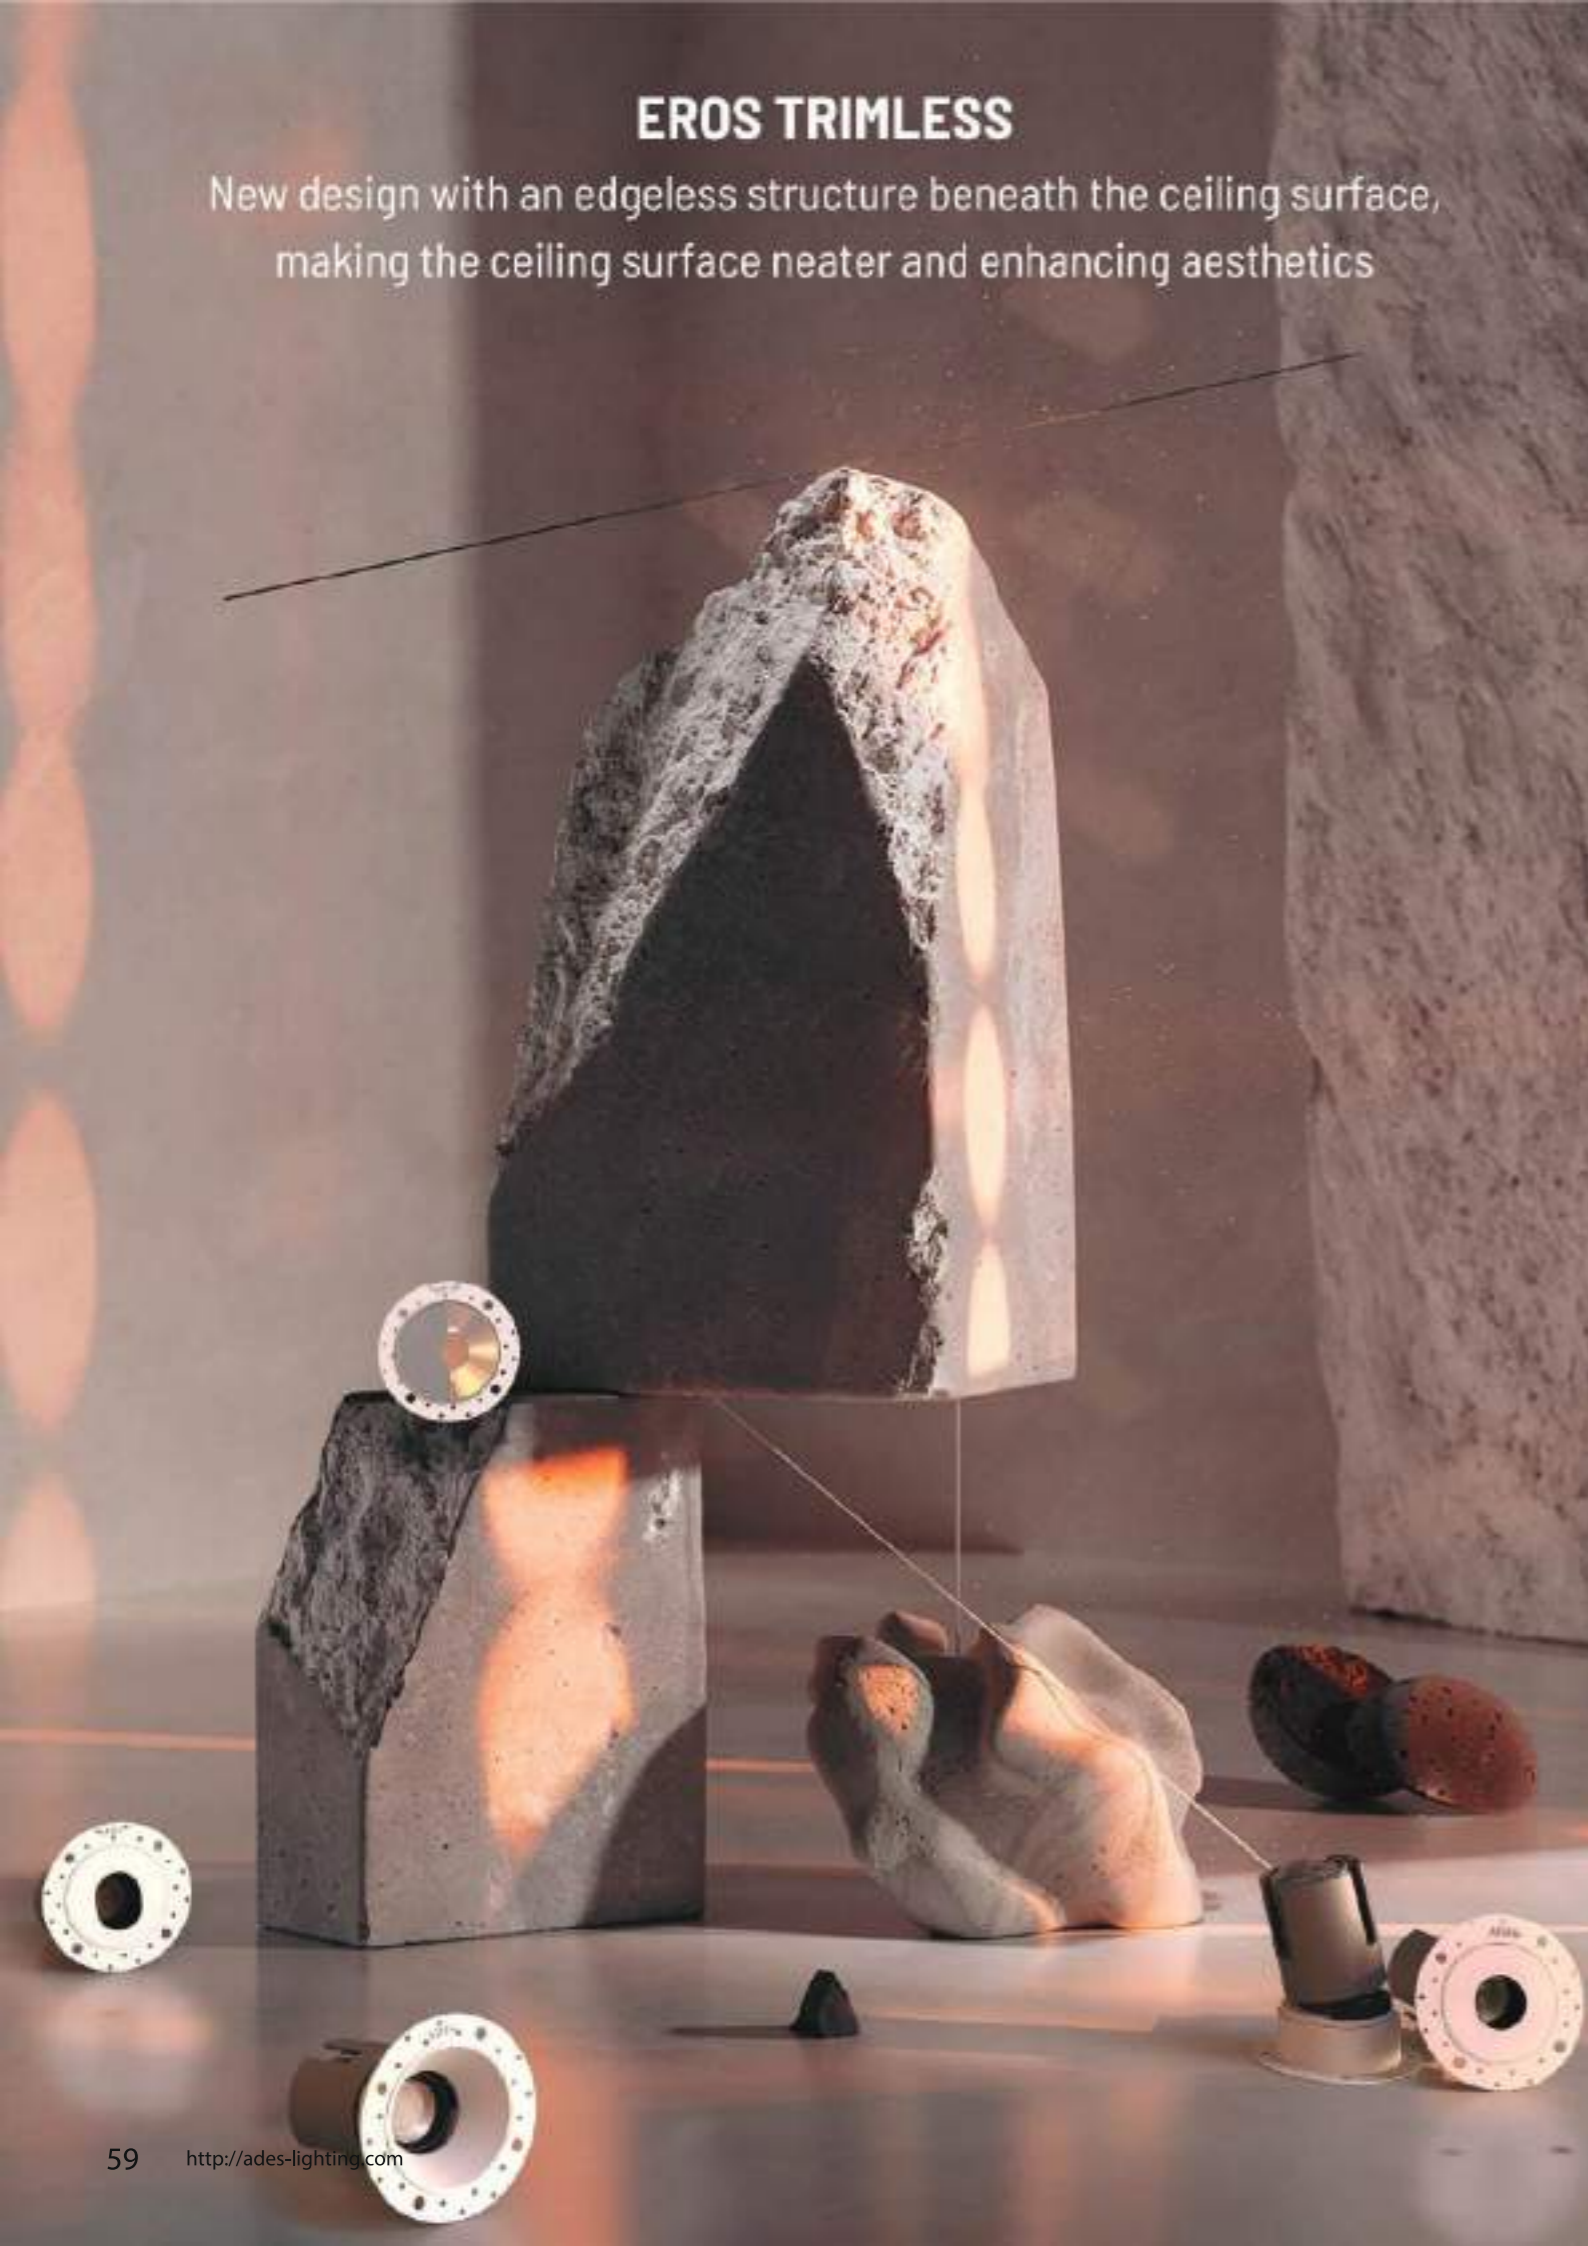



Body color


● Metal Grey

Reflector color

○ Matt White/ Shiny White

● Matt Black/ Shiny Black


● Gloss Silver



TRIMLESS CEILING

Model:	E7507TC	E7512TC	E7518TC	E9525TC
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

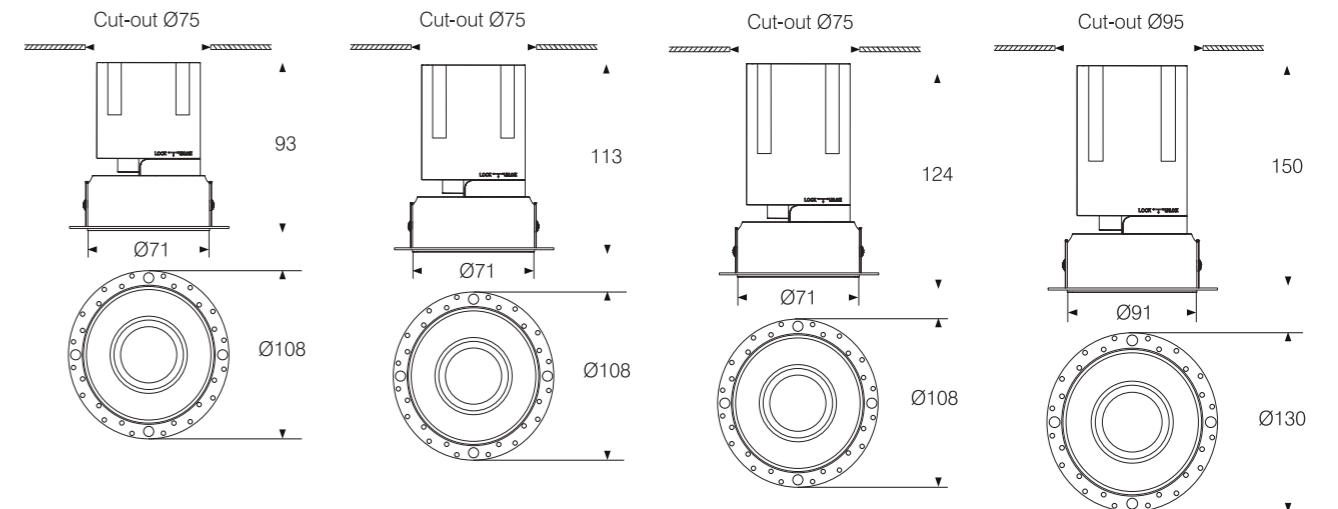

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




Body color

● Metal Grey

○ Matt White/ Shiny White

● Matt Black/ Shiny Black


● Gloss Silver



TRIMLESS CEILING

Model:	E7507TS	E7512TS	E7518TS	E9525TS
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 36°/ 55°			

Dimensions:

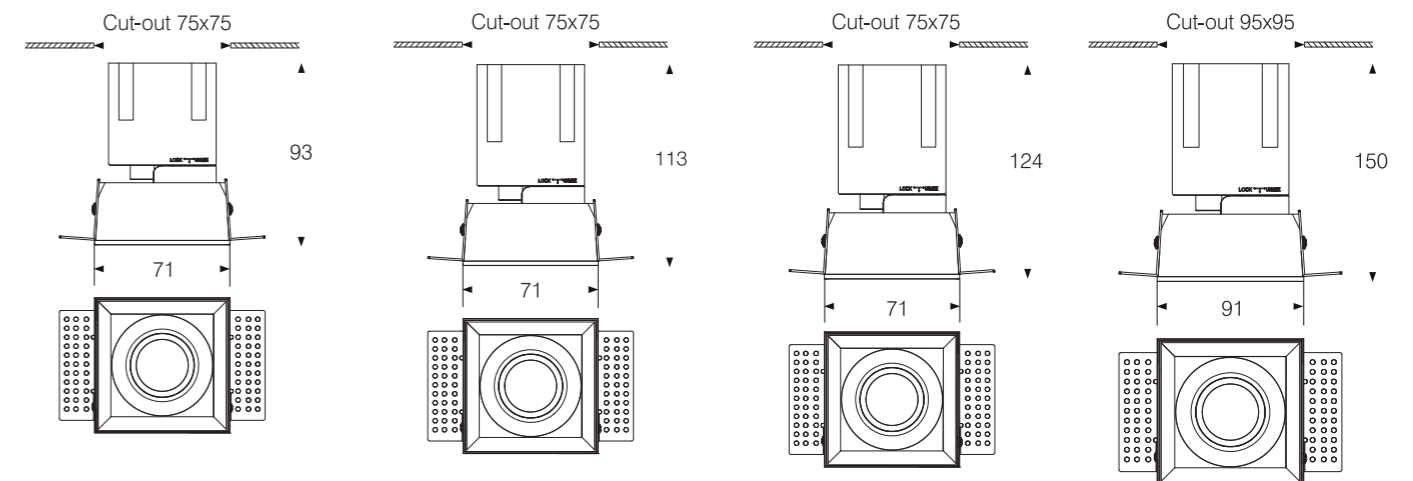

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
 Metal Grey
 Reflector color
 Matt White



TRIMLESS CEILING

Model:	E7507TO	E7512TO	E7518TO	E9525TO
Power:	7W	12W	18W	25W
Luminous:	525lm	900lm	1350lm	1800lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

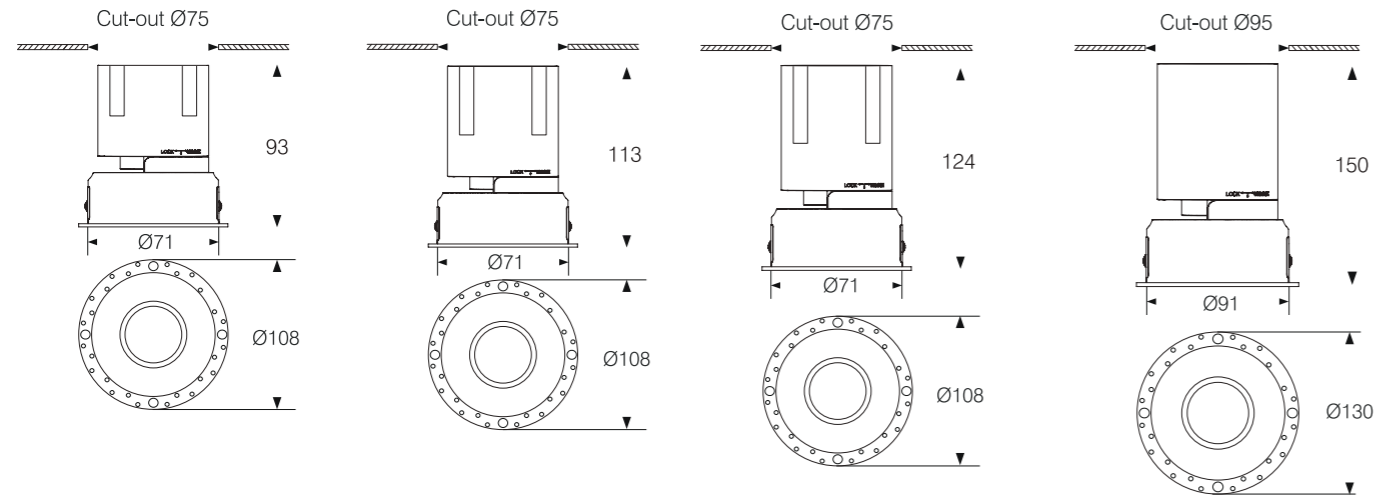

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
 Metal Grey
 Reflector color
 Matt White



TRIMLESS CEILING

Model:	E7507TE	E7512TE	E7518TE
Power:	7W	12W	18W
Luminous:	525lm	900lm	1350lm
Beam angle:	15°/ 24°/ 36°		

Dimensions:

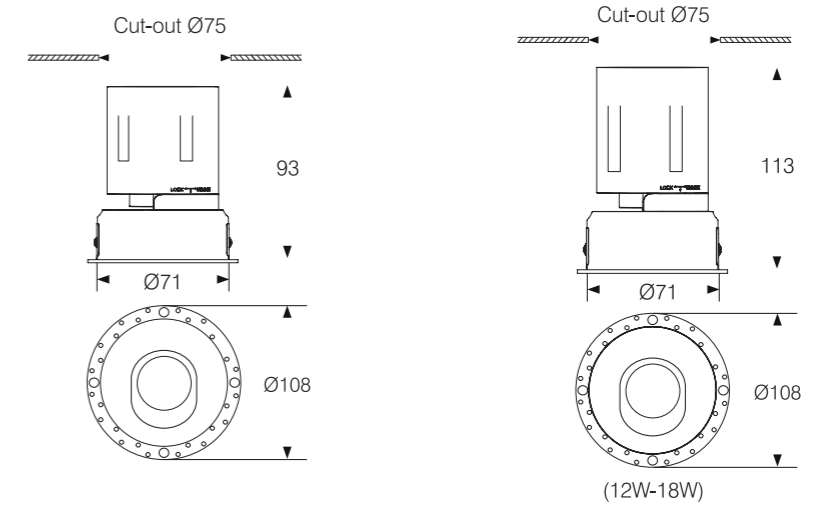

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Gloss Silver



TRIMLESS CEILING

Model:	E7510TW	E7518TW	E9525TW
Power:	10W	18W	25W
Luminous:	600lm	1350lm	1875lm
Beam angle:	60°		

Dimensions:

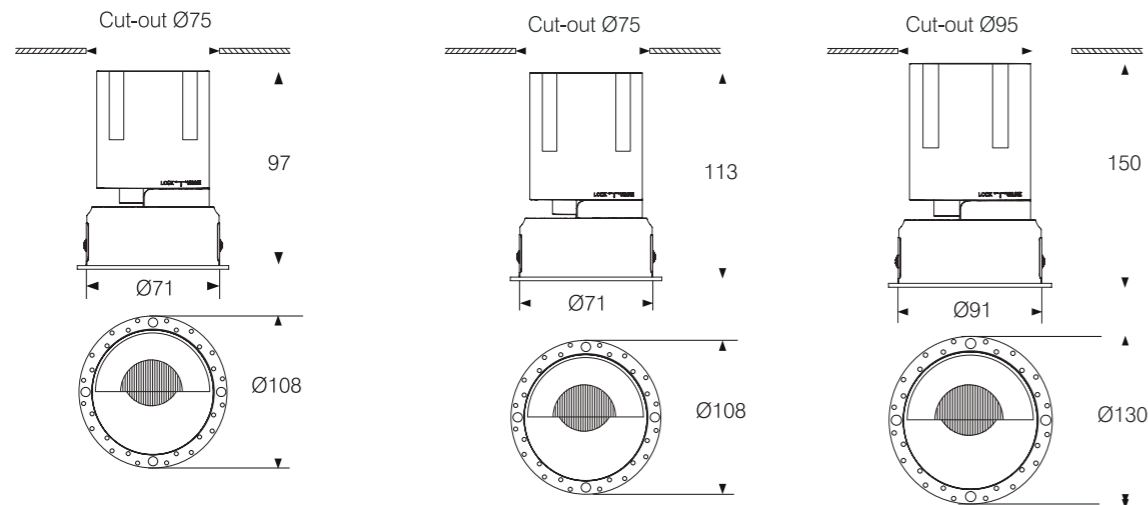

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Gloss Silver



TRIMLESS CEILING

Model:	E7510TSW	E7518TSW	E9525TSW
Power:	10W	18W	25W
Luminous:	600lm	1350lm	1875lm
Beam angle:	60°		

Dimensions:

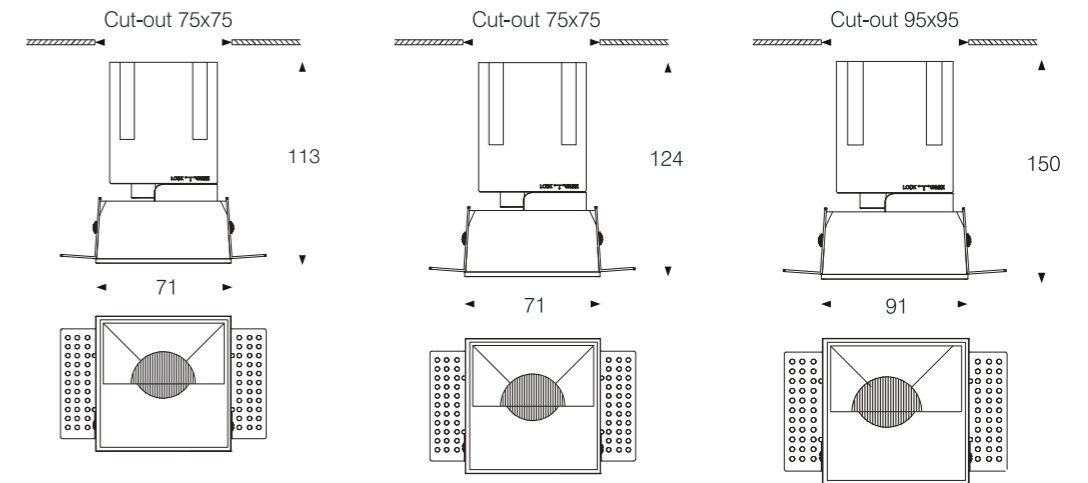

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color


○ Matt White

● Matt Black

RECESSED CEILING

Model:	F3503D	F4505D	F4507D
Power:	3W	5W	7W
Lumini-	210lm	350lm	490lm
Beam angle:	8°/ 15°/ 24°/ 36°	15°/ 24°/ 36°	

Dimensions:

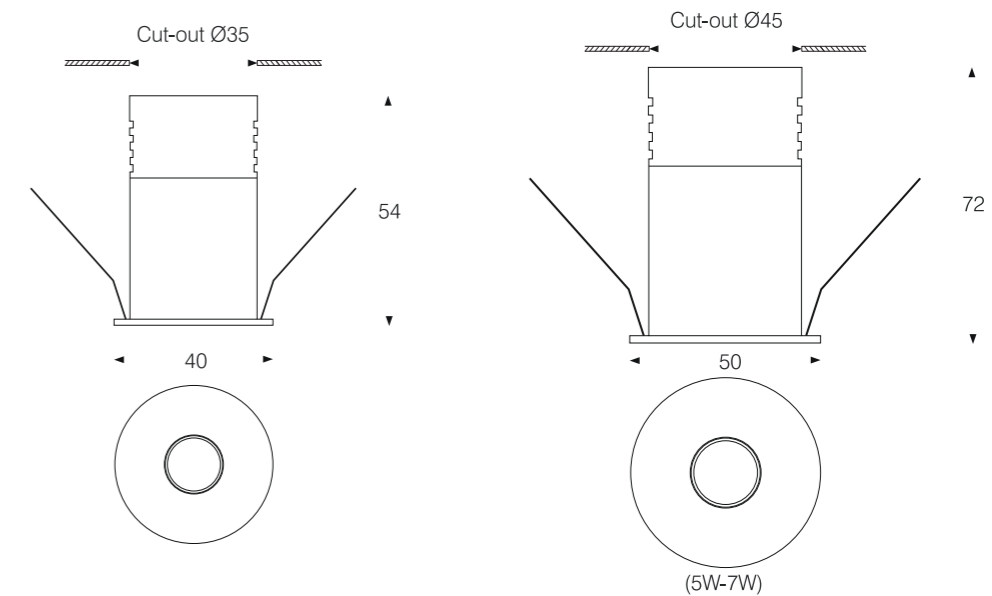

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt White

Reflector color


Preat Black

Matt Black

Matt White

RECESSED CEILING

Model:	F5503EL	F5505EL	F7507EL
Power:	3W	5W	7W
Luminous:	225lm	375lm	750lm
Beam angle:	5°		
Dimensions:			

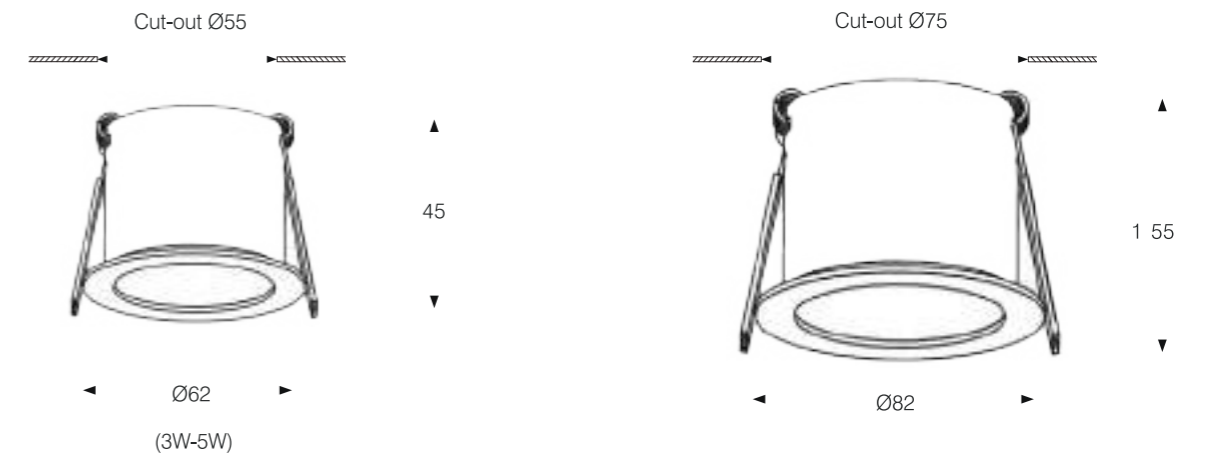


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Elevating your design with the innovative Focus Pro lights.

With adjustable features, the Focus Pro lights allows you to effortlessly change the projection angle which provides unparalleled flexibility to meet the unique requirements of your project.

ZOOMABLE 15°-55°

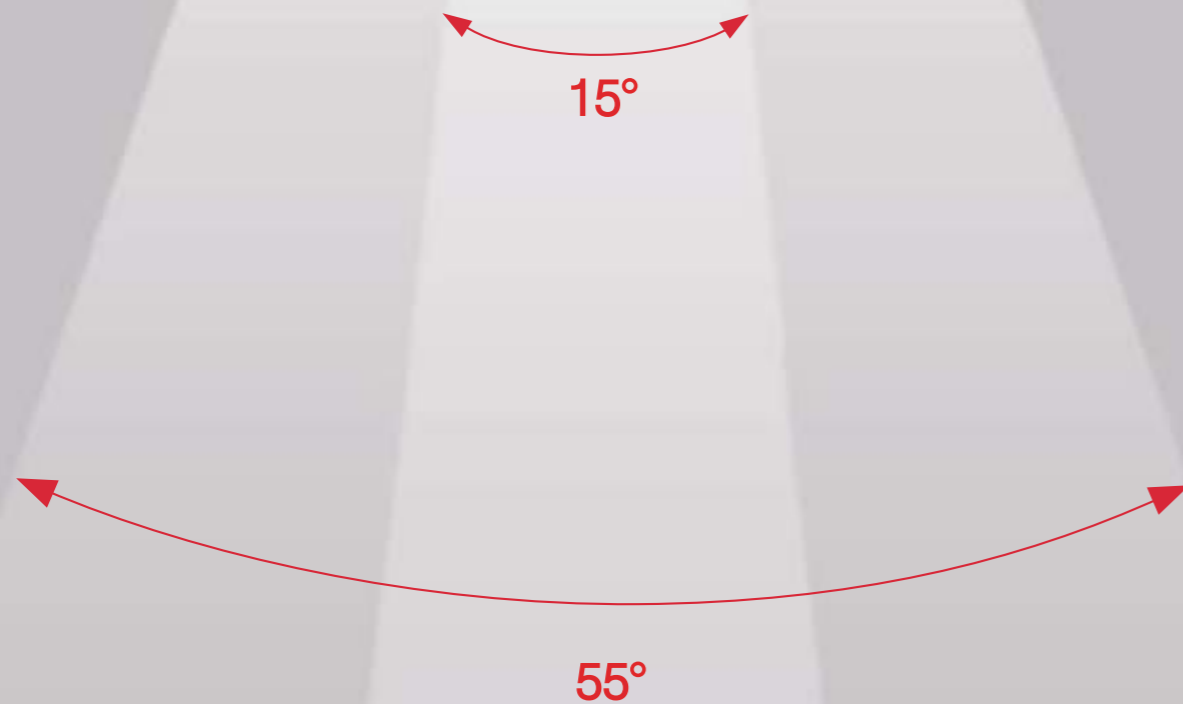

FOCUS PRO



Body color

Matt White

Matt Black


Reflector color

Matt White

Matt Black/ Pearl Black

RECESSED CEILING

Model:	F7010Z
Power:	10W
Lumini-	700lm
Beam angle:	Zoomable 15°-55°
Dimensions:	

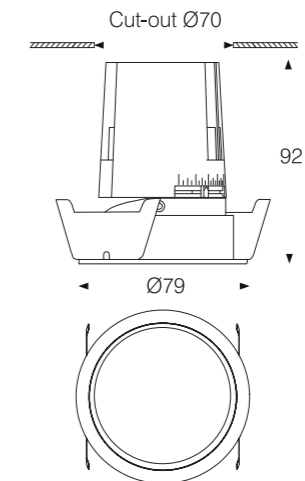


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

HELIOS

- The Helios uses an asymmetrical hinge that allows for 90° of tilt and 355° of rotation. The unique feature of this hinge is the thin, seamless tube shape that increases aesthetics.
- Suitable for residential, store,.....

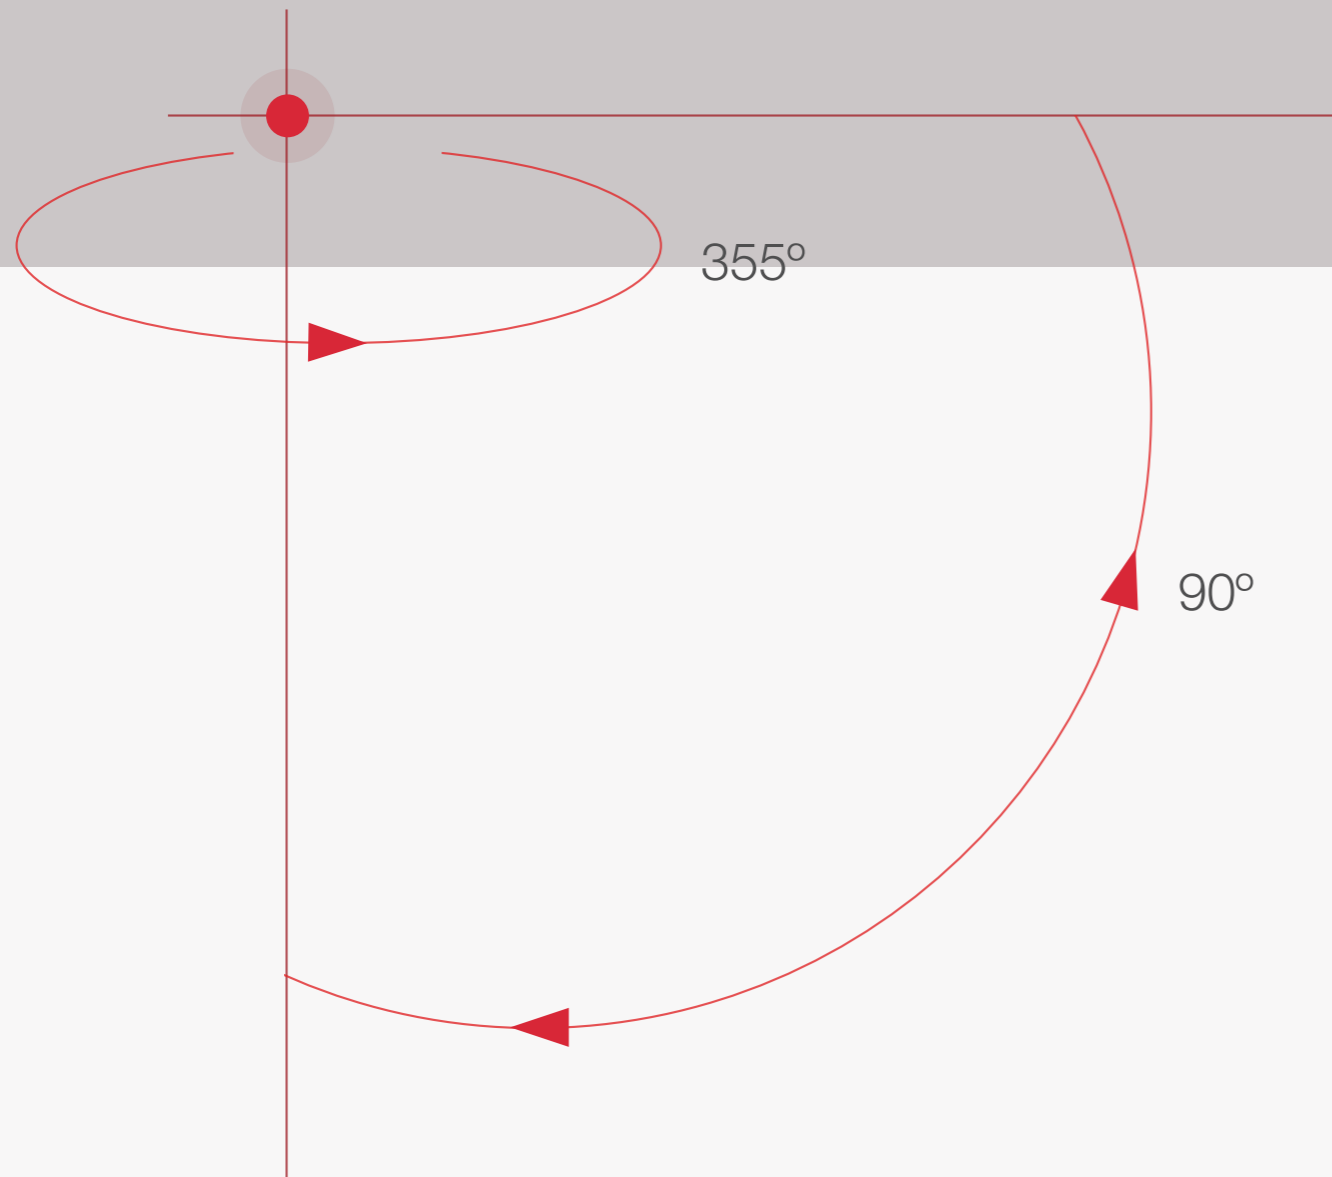

Folding 90° and rotating 355° allows the lamp to illuminate exactly where needed



Body color

● Matt Black

○ Matt White

Reflector color


○ Matt White

● Matt Black



RECESSED CEILING

Model:	H7507C	H9015C
Power:	7W	15W
Luminous:	525lm	1125lm
Beam angle:	15°/24°	24°
Dimensions:		

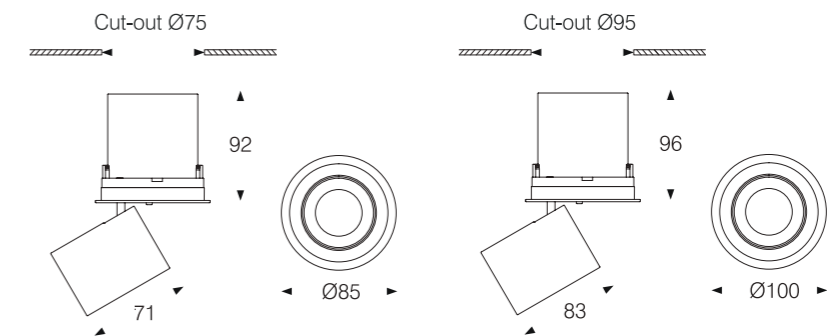

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt Black

Matt White

Reflector color


Matt White

Matt Black



RECESSED CEILING

Model	H7520R
Power:	2x10W
Lumini-	2x750lm
Beam angle:	15°/ 24°/ 36°
Dimensions:	

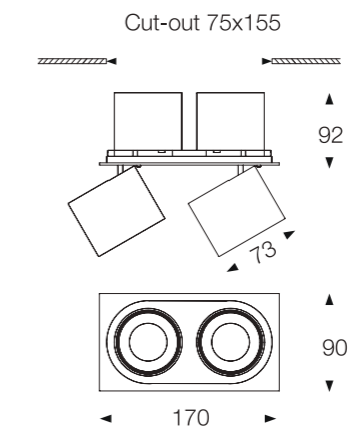

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt White

Matt Black

Reflector color

Matt White


Matt Black



RECESSED CEILING

Model:	L1010S	L1020R	L2830R
Power:	10W	2x10W	3x10W
Luminous:	750lm	1500lm	2250lm
Beam angle:	15°/ 24°/ 40°		

Dimensions:

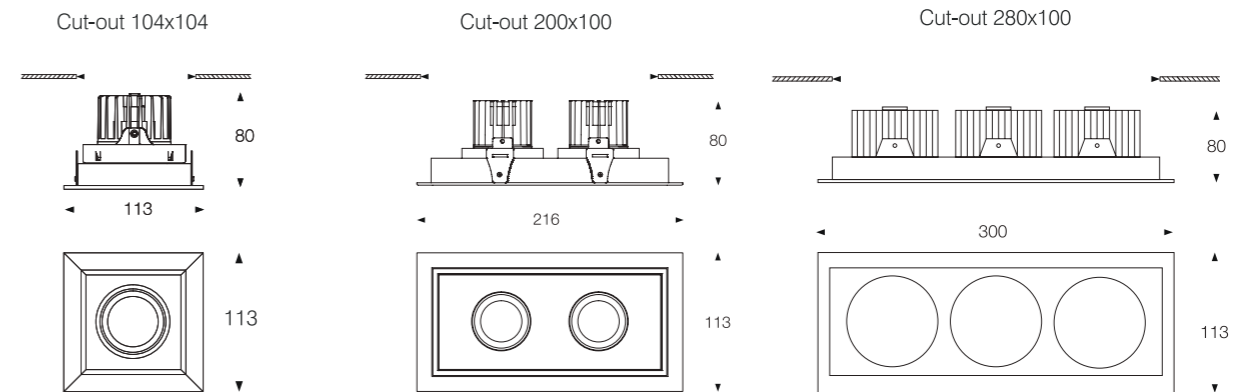

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

● Metal Grey

○ Reflector color

○ Matt White

● Matt Black


● Gloss Silver



RECESSED CEILING

Model	M7508A	M7512A	M9518A	M9525A
Power:	8W	12W	18W	25W
Lumini-	600lm	900lm	1350lm	1875lm
Beam angle:	15°/ 24°/ 38°/ 55°			

Dimensions:

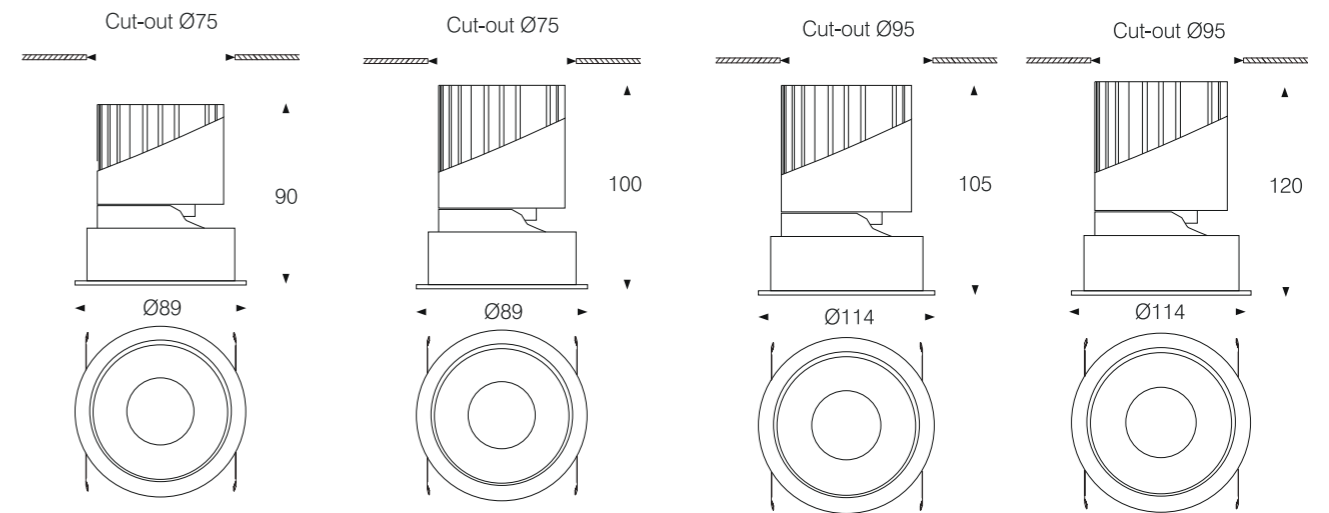

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth





- Body color
- Metal Grey
- Reflector color
- Matt White



RECESSED CEILING

Model:	M7508E	M7512E	M9518E
Power:	8W	12W	18W
Lumini-	560lm	840lm	1260lm
Beam angle:		15°/ 24°/ 38°	
Dimensions:			

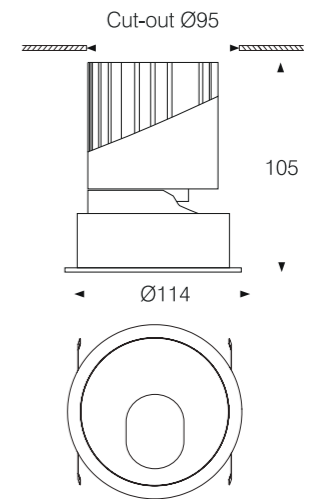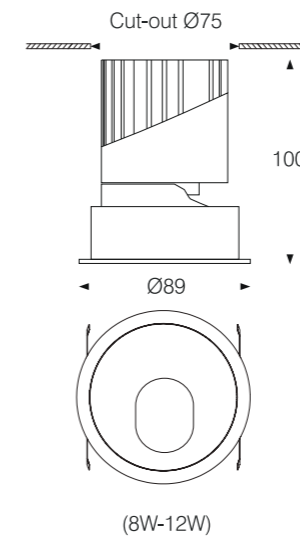

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




- Body color
- Metal Grey
- Reflector color
- Matt White



RECESSED CEILING

Model:	M5506O	M7512O	M9518O	M9525O
Power:	6W	12W	18W	25W
Lumini-	420lm	840lm	1260lm	1750lm
Beam angle:	15°/ 24°/ 38°			

Dimensions:

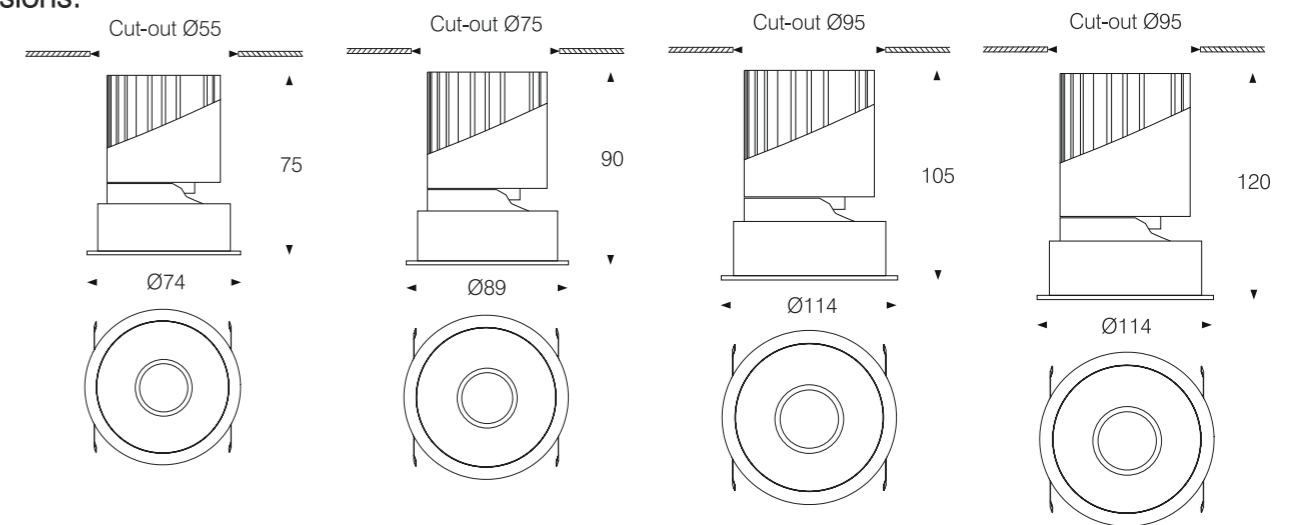

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth




- Body color
- Metal Grey
- Reflector color
- Matt White



TRIMLESS CEILING

Model	M7508TA	M7512TA	M9518TA	M9525TA
Power:	8W	12W	18W	25W
Lumini-	600lm	840lm	1260lm	1750lm
Beam angle:	15°/ 24°/ 38°/ 55°			

Dimensions:

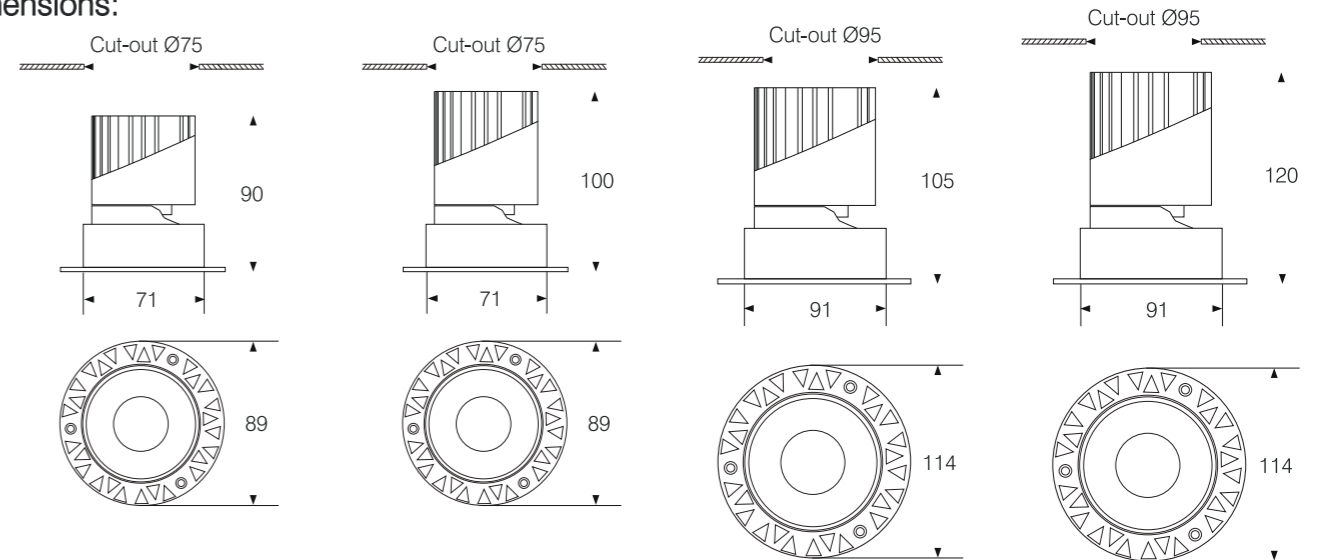

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
 ● Metal Grey
 Reflector color
 ○ Matt White



TRIMLESS CEILING

Model:	M7508TE	M7512TE	M9518TE
Power:	8W	12W	18W
Luminious:	560lm	840lm	1260lm
Beam angle:	15°/ 24°/ 38°		

Dimensions:

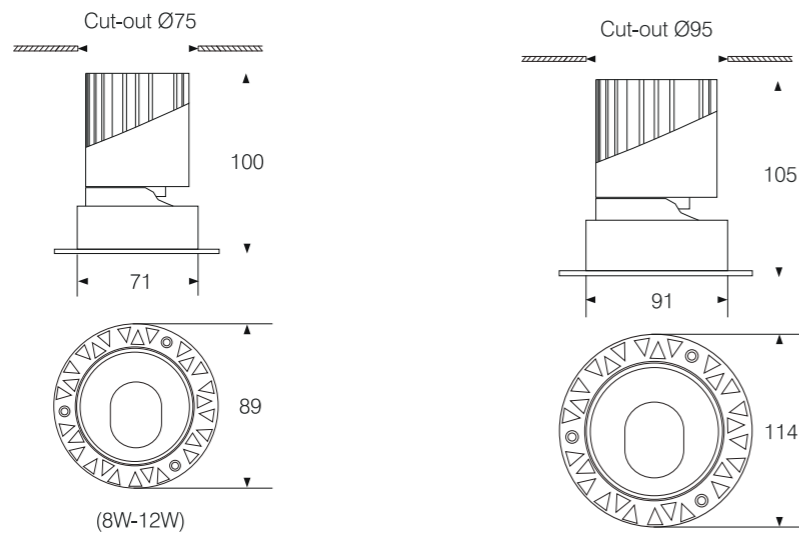

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
 ● Metal Grey
 Reflector color
 ○ Matt White



TRIMLESS CEILING

Model	M5506TO	M7512TO	M9518TO	M9525TO
Power:	6W	12W	18W	25W
Luminious:	420lm	840lm	1260lm	1750lm
Beam angle:	15°/ 24°/ 38°			

Dimensions:

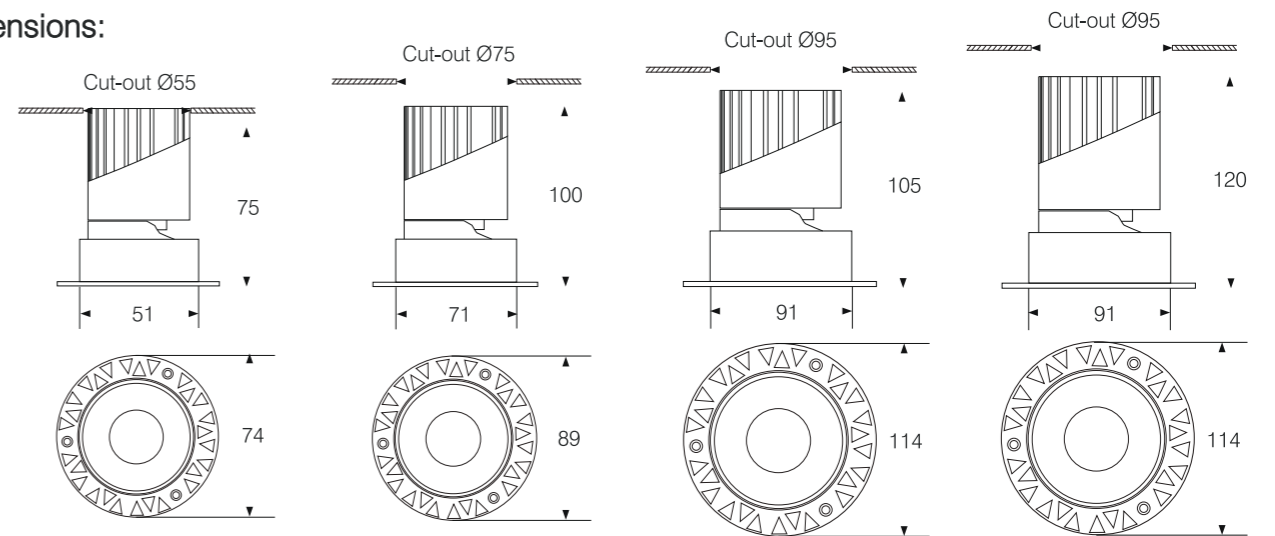

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt White


Reflector color

Matt White



RECESSED CEILING

Model:	M7510-IP65	M9520-IP65
Power:	10W	20W
Luminous:	750lm	1500lm
Beam angle:	24°/ 36°	24°/ 36°
Dimensions:		

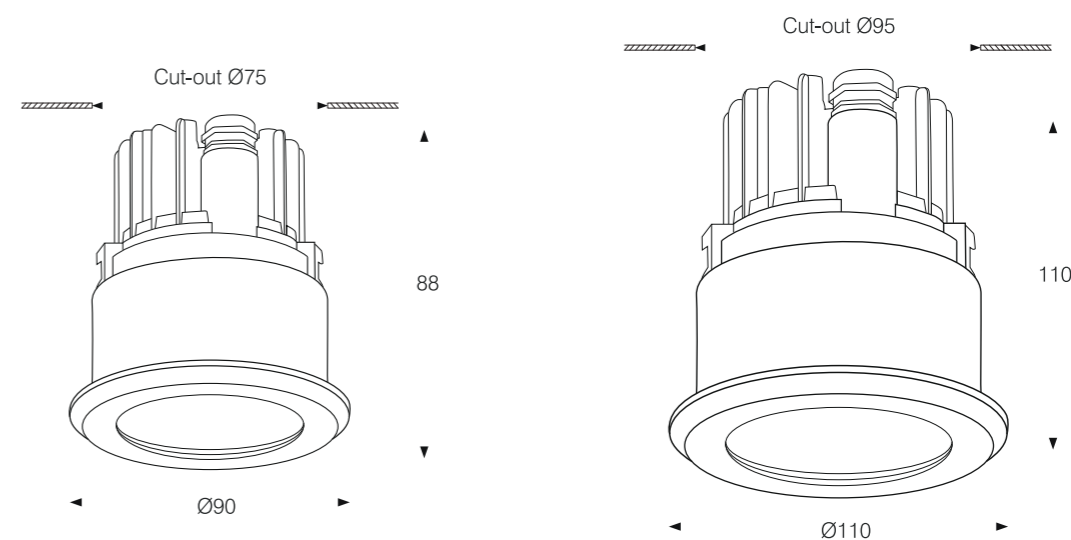


General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



RECESSED CEILING

Model:	M5008R
Power:	8W
Luminous:	400lm
Beam angle:	24°
Dimensions:	

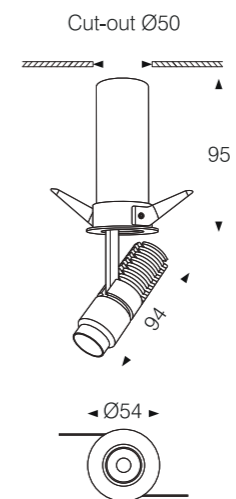

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	98
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable Whitte
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

○ Metal White

● Matt Black

Reflector color

○ Matt White

● Matt Black




ZOOMABLE RECESSED CEILING

Model:	M4505Z	M4510Z
Power:	5W	10W
Luminous:	350lm	700lm
Beam angle:	Zoomable 8°-40°	

ZOOMABLE TRIMLESS CEILING

Model:	M4505TZ	M4510TZ
Power:	5W	10W
Luminous:	350lm	700lm
Beam angle:	Zoomable 8°-40°	

Dimensions:

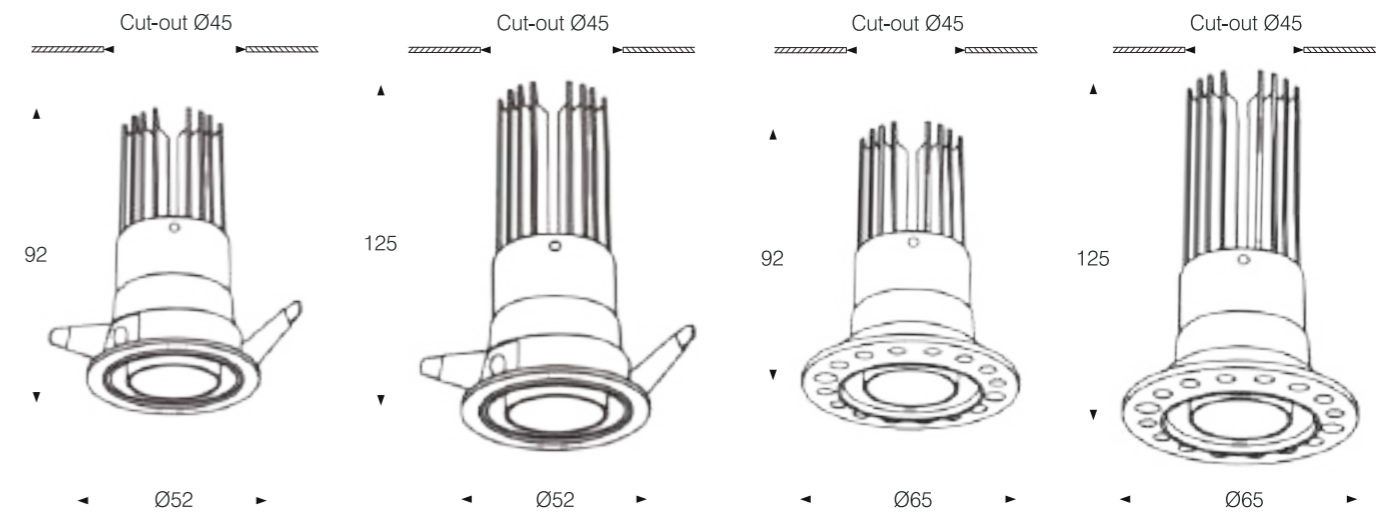

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Minimalistic looking but multiple functions; It can be vertically adjustable and rotated horizontally in any direction.

Body color

- Matt White
- Matt Black



Reflector color

- Matt White
- Matt Black




ZOOMABLE RECESSED CEILING

Model	OC3507Z	OC3515Z
Power:	7W	15W
Luminous:	302lm	652lm
Beam angle:	Zoomable 15°-45°	
Dimensions:		

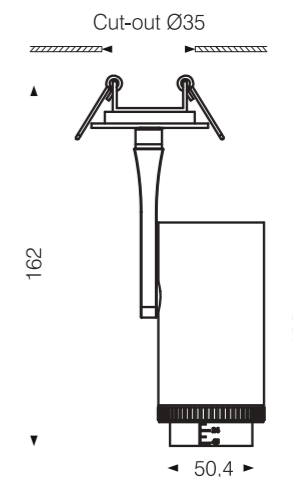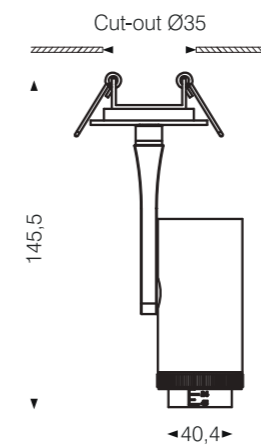

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

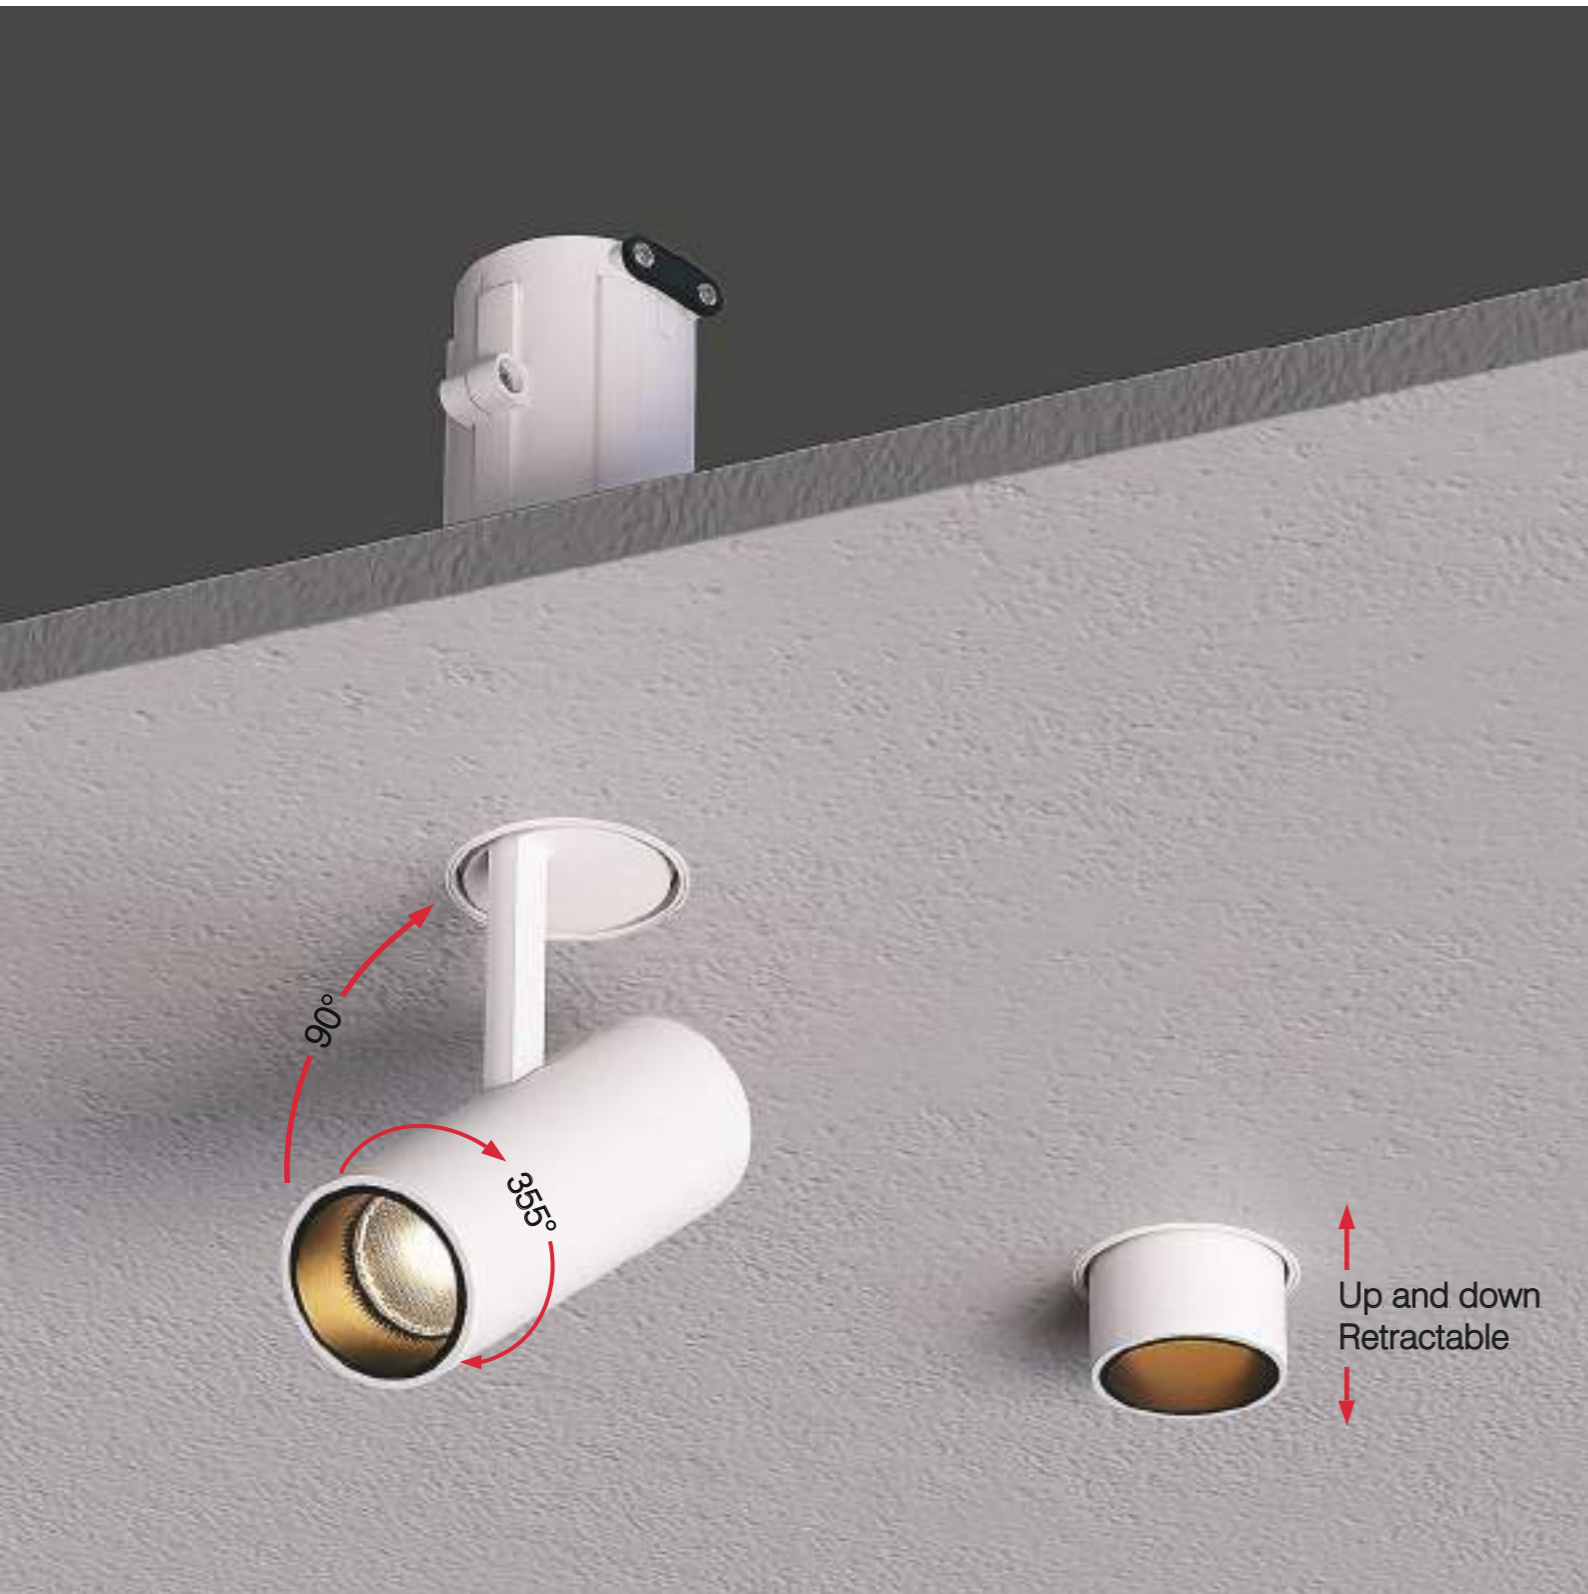

Body color

- Matt White
- Matt Black

Reflector color

- Matt White
- Matt Black





RECESSED CEILING

TRIMLESS CEILING


Model	S4505Z	S4505T
Power:	5W	5W
Luminous:	350lm	350lm
Beam angle:	20°/ 30°/ 40°/ 60°	20°/ 30°/ 40°/ 60°

Dimensions:

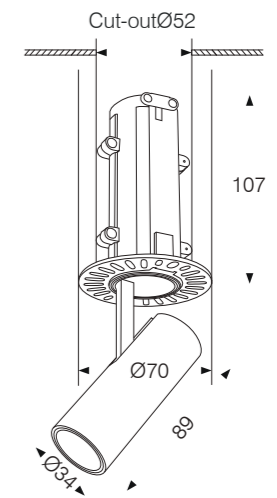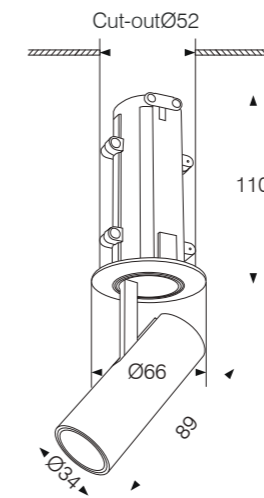

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

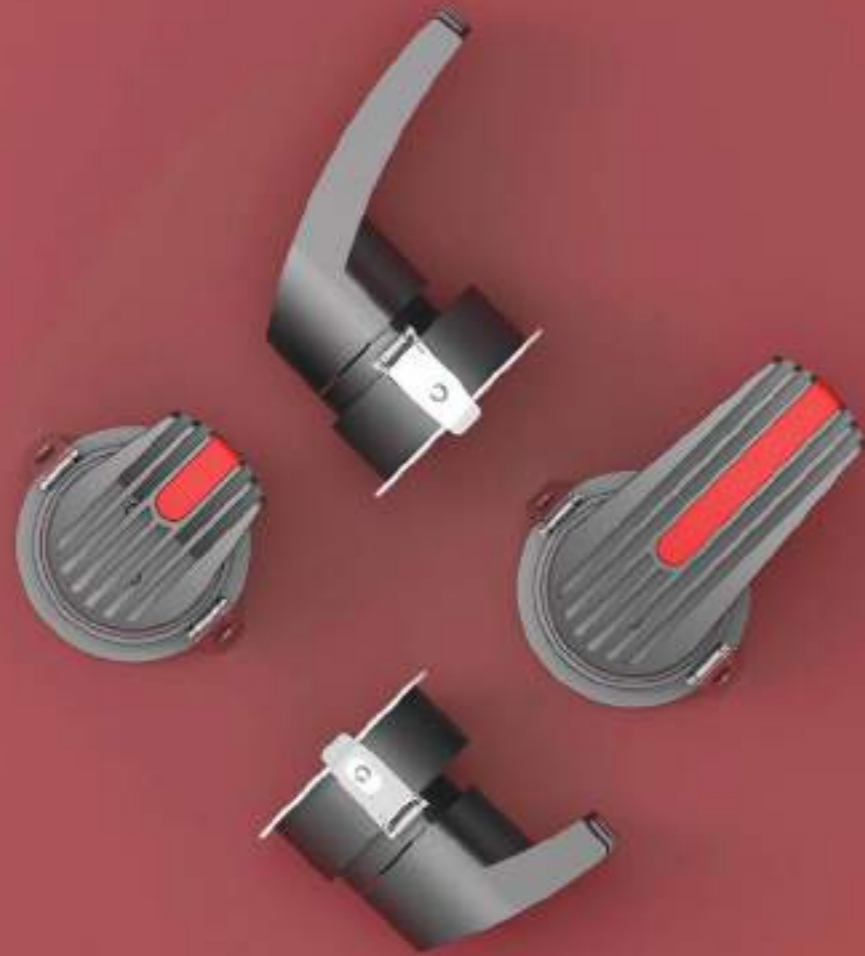

Body color

● Metal Grey

○ Reflector color

○ Matt White

● Matt Black





● Gloss Silver



RECESSED CEILING

Model:	S7508C	S7512C	S7515C	S9525C	S9535C
Power:	8W	12W	15W	25W	35W
Lumini-	600lm	900lm	1125lm	1875lm	1350lm
Beam angle:	8°/ 15°/ 24°/ 36°/ 55°				

Dimensions:

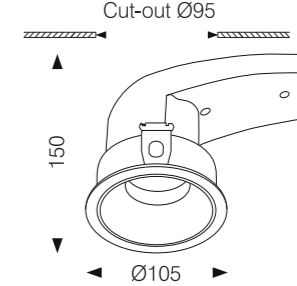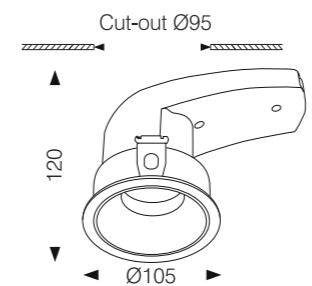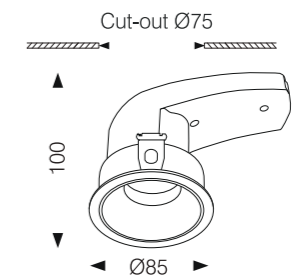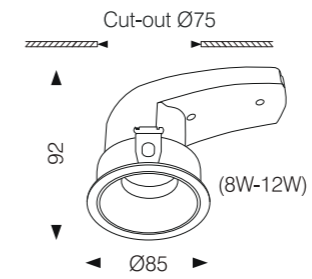

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

Matt White/ Metal Grey

Matt Black

Reflector color

Matt White

Matt Black




Honey Comb

RECESSED CEILING

Model:	T4003A	T4605A	T4607A	T5212A
Power:	3W	5W	7W	12W
Luminous:	195lm	375lm	525lm	883lm
Beam angle:	15°/ 24°/ 36°			

Dimensions:

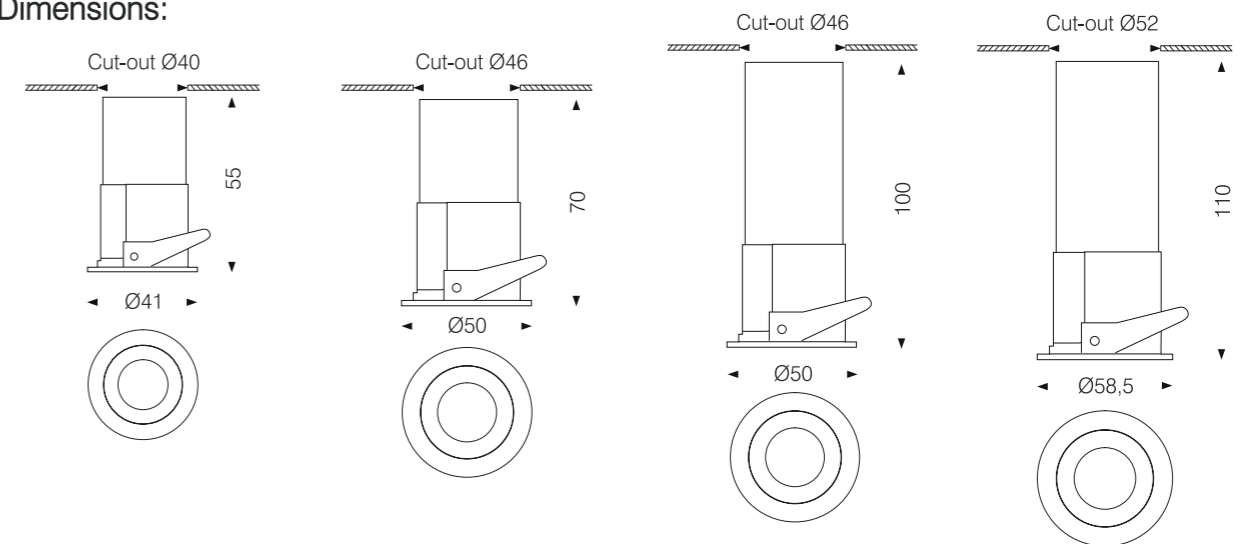

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 5000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Matt White
 - Matt Black/ Shiny Black
 - Gloss Silver



RECESSED CEILING

Model	Y7510C	Y7515C	Y9525C
Power:	10W	15W	24W
Lumini-	750lm	1125lm	1800lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

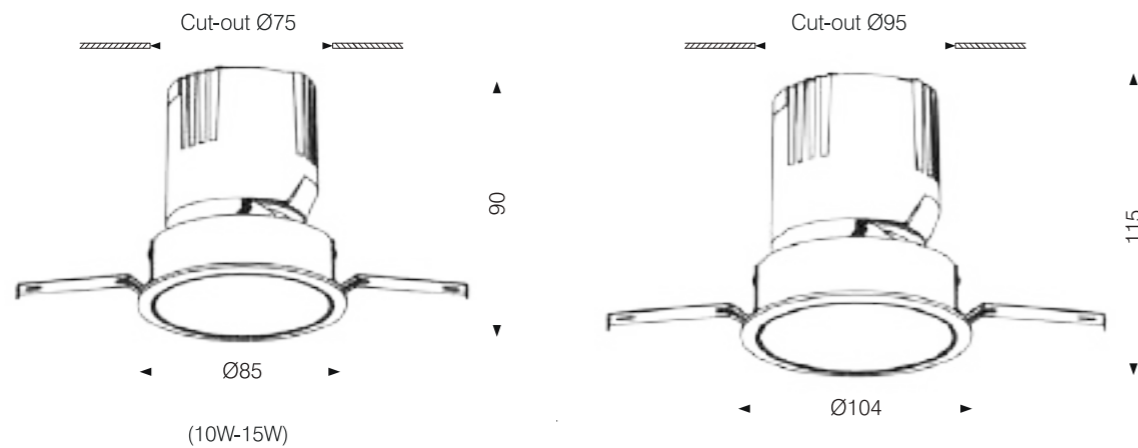

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Matt White
 - Matt Black/ Shiny Black
 - Gloss Silver



RECESSED CEILING

Model	Y1235C	Y1455C
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

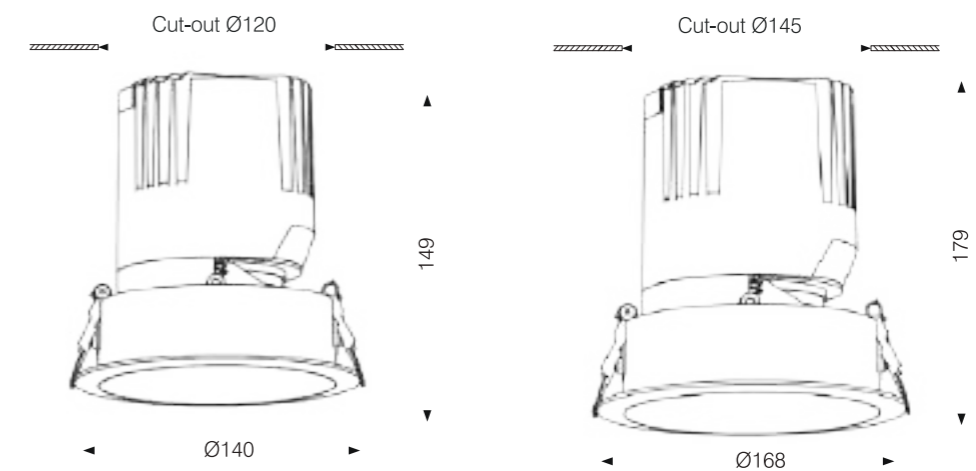

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tuable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee Dim, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver



TRIMLESS CEILING

Model:	Y7510TC	Y7515TC	Y9524TC
Power:	10W	15W	24W
Luminous:	750lm	1125lm	1800lm
Beam angle:	15°/ 24°/ 36°/ 55°		

Dimensions:

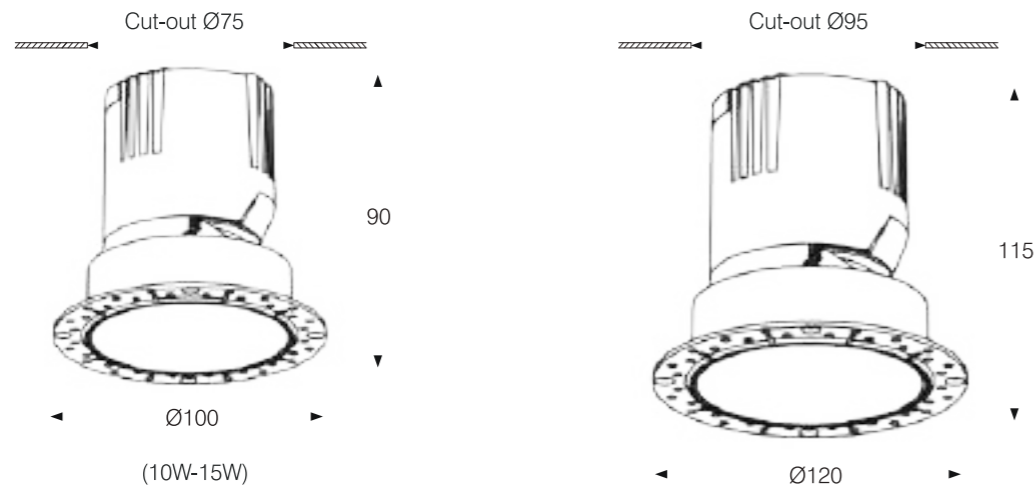

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver



TRIMLESS CEILING

Model:	Y1235TC	Y1455TC
Power:	35W	55W
Luminous:	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	

Dimensions:

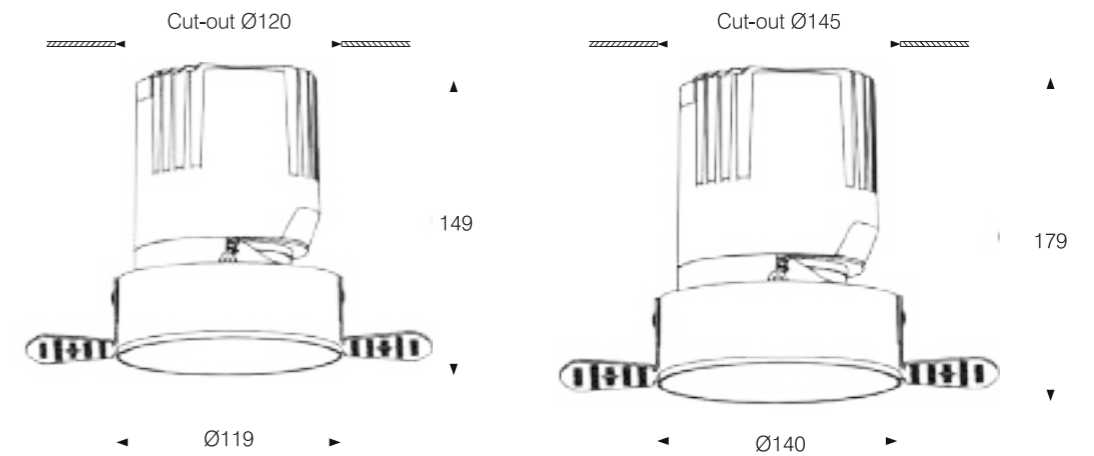

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee Dim, Bluetooth



- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver

RECESSED CEILING

Model:	Y7510S	Y7515S	Y9524S
Power:	10W	15W	24W
Lumini-	750lm	1250lm	1800lm
Beam angle:	15°/ 24°/ 36°/ 55°		
Dimensions:			

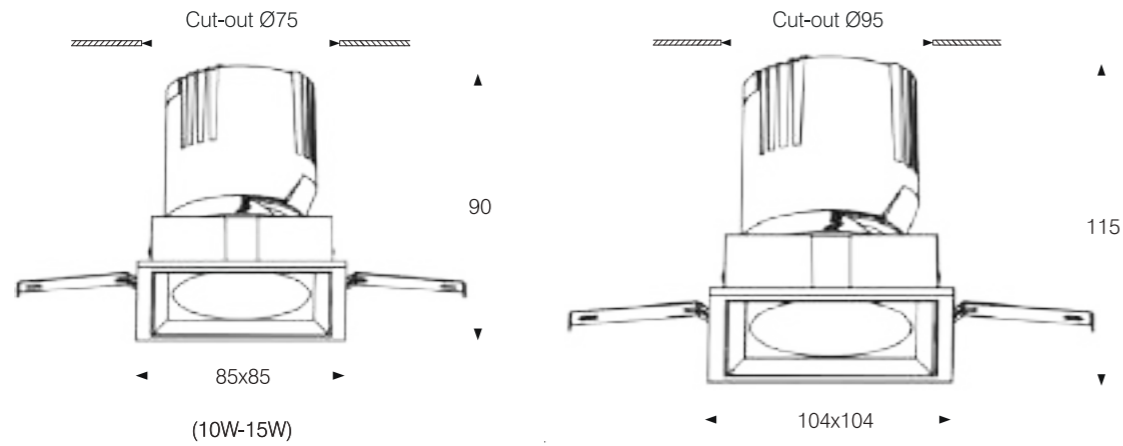

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver

RECESSED CEILING

Model:	Y1235S	Y1455S
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	
Dimensions:		

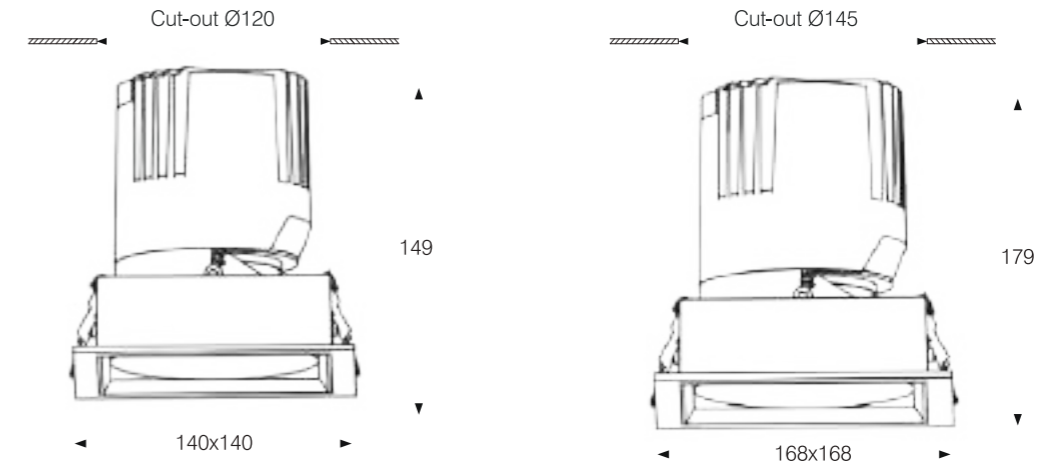

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver



TRIMLESS CEILING

Model	Y1235TS	Y1455TS
Power:	35W	55W
Lumini-	2450lm	3850lm
Beam angle:	15°/ 24°/ 36°/ 55°	
Dimensions:		

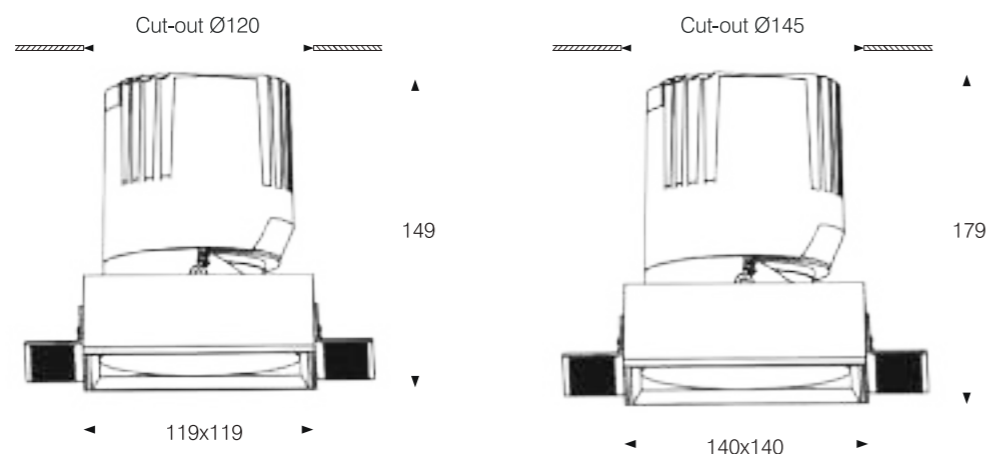

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

- Body color
- Metal Grey
- Reflector color
- Matt White/ Shiny White
 - Matt Black/ Shiny Black
 - Gloss Silver



TRIMLESS CEILING

Model	Y7510TS	Y7515TS	Y9524TS
Power:	10W	15W	24W
Lumini-	750lm	1250lm	1800lm
Beam angle:	15°/ 24°/ 36°/ 55°		
Dimensions:			

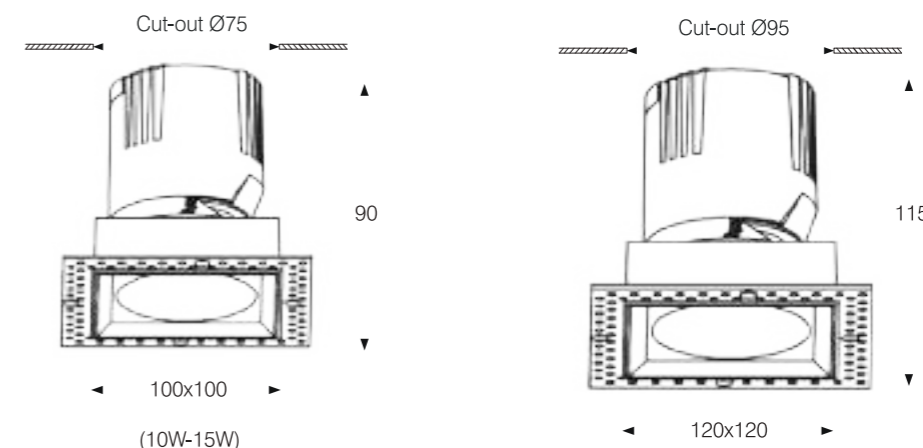

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K/ Tunable White/ RGB
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

ZENITH TRIMLESS

New design with an edgeless structure beneath the ceiling surface, making the ceiling surface neater and enhancing aesthetics.



Body color

- Matt White
- Matt Black/ Pearl Black

Reflector color

- Matt White
- Matt Black/ Pearl Black





RECESSED CEILING

Model:	Z4506A	Z4509A
Power:	6W	9W
Luminous:	330lm	500lm
Beam angle:	15°/ 24°	50°
Dimensions:		

TRIMLESS CEILING

Model:	Z4506T	Z4509T
Power:	6W	9W
Luminous:	330lm	500lm
Beam angle:	15°/ 24°	50°
Dimensions:		

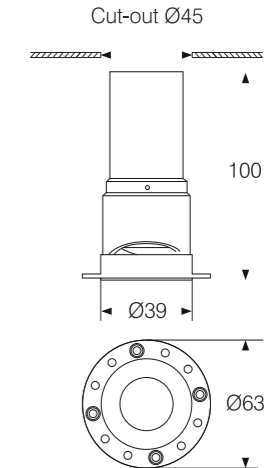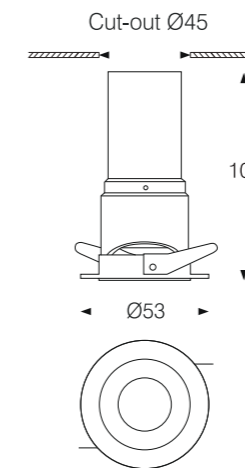

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

CARMAN



Carman is inspired of famous supercars which has Italia style.

- Compact design, flexible rotation angle of 355°
- Zoomable 15°-50°
- Using entirely monolithic aluminum, specially designed with many small holes in the lamp body to help dissipate heat well. This increases stability and maximizes lamp lifespan zoomable 15°-50°
- The delicate design increases aesthetics, creating soft lighting effects suitable for artistic lighting spaces





Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White


● Matt Black



ZOOMABLE RECESSED CEILING

Model:	C4510ZA	C5515ZA	C6525ZA	C7535ZA
Power:	10W	15W	25W	35W
Luminous:	700lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			

Dimensions:

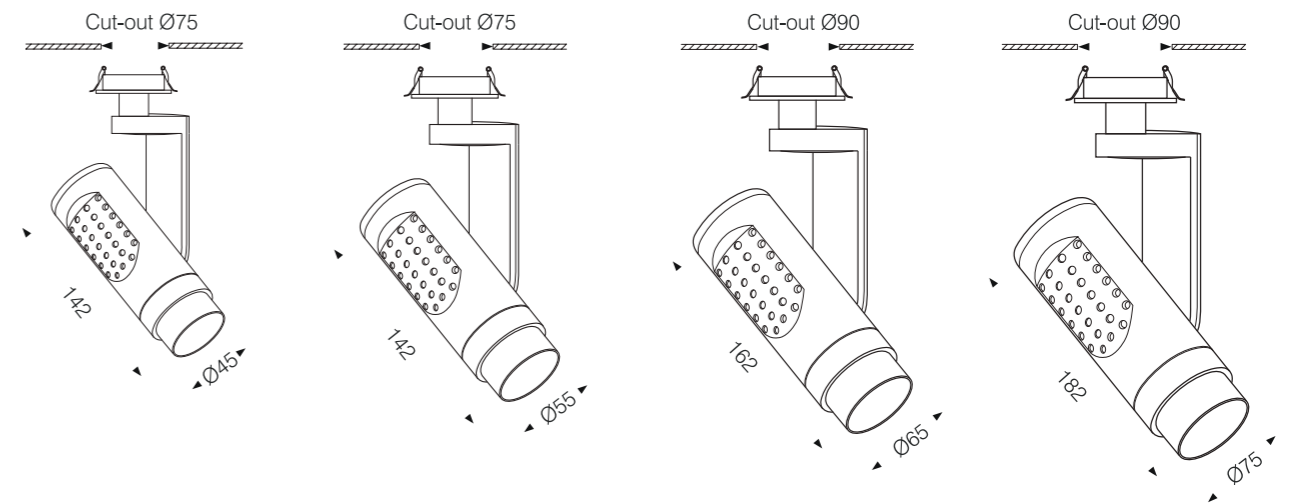

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White


● Matt Black



ZOOMABLE SURFACE

Model:	C4508ZS	C5515ZS	C6525ZS	C7535ZS
Power:	8W	15W	25W	35W
Luminous:	560lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			

Dimensions:

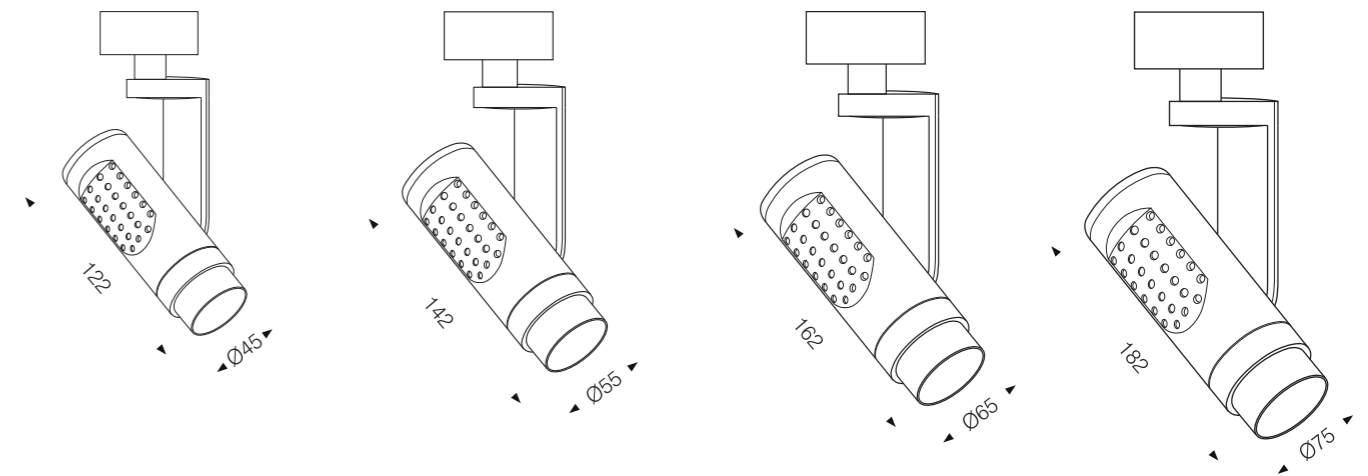

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White


● Matt Black



ZOOMABLE TRACK LIGHT

Model:	C4510Z	C5515Z	C6525Z	C7535Z
Power:	10W	15W	25W	35W
Luminous:	700lm	1050lm	1750lm	2450lm
Beam angle:	Zoomable 15°- 50°			

Dimensions:

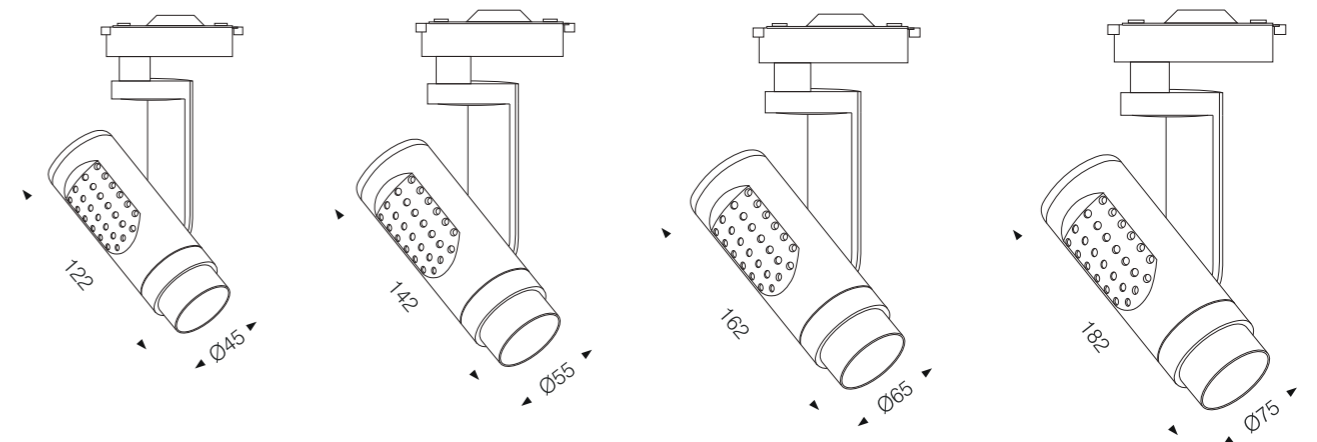

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortektv
CRI(Ra):	>95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Option	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track



Body color

Matt Black

Matt White

Reflector color


Matt White

Matt Black



SURFACE

Model:	L5310S	L6320S
Power:	10W	20W
Luminous:	750lm	1500lm
Beam angle:	15°/ 24°/ 36°	
Dimensions:		

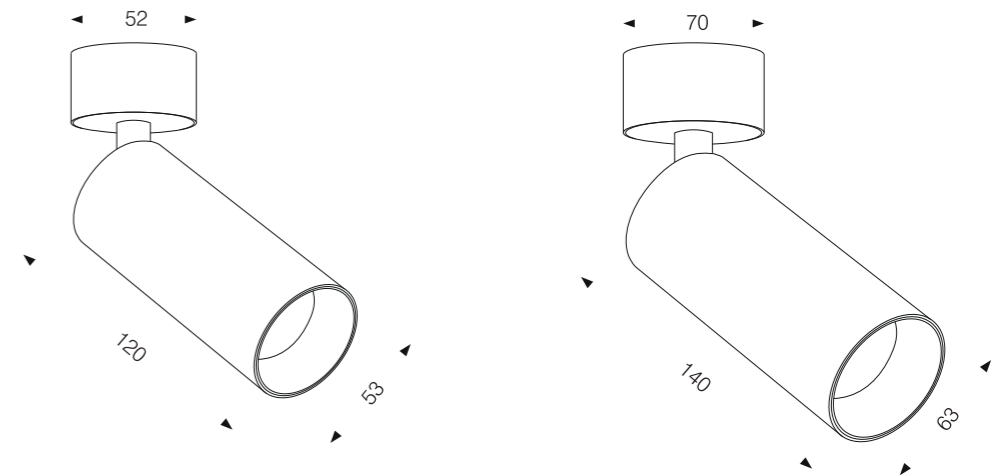

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



SURFACE MOUNTED

- Surface-mounted lights are convenient for installation
- Good glare control brings comfort to the space



Body color

Matt White

Matt Black

Reflector color

Matt Black




Matt White



SURFACE

Model:	D7610W	D9120W	D12830W
Power:	10W	20W	30W
Luminous:	700lm	1400lm	2100lm
Beam angle:	15°/ 24°/ 36°		

Dimensions:

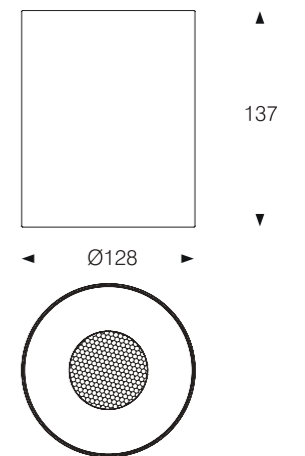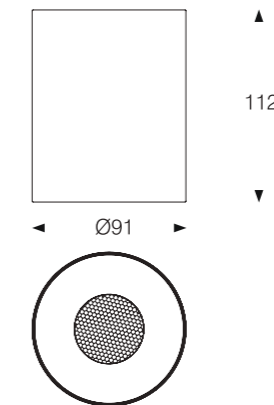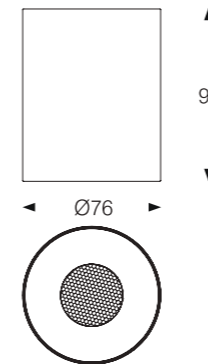

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black

Reflector color


- Matt White
- Matt White



SURFACE

Model:	D9515-IP65	D9520-IP65
Power:	15W	20W
Luminous:	1150lm	1520lm
Beam angle:	15°/ 24°/ 36°	

Dimensions:

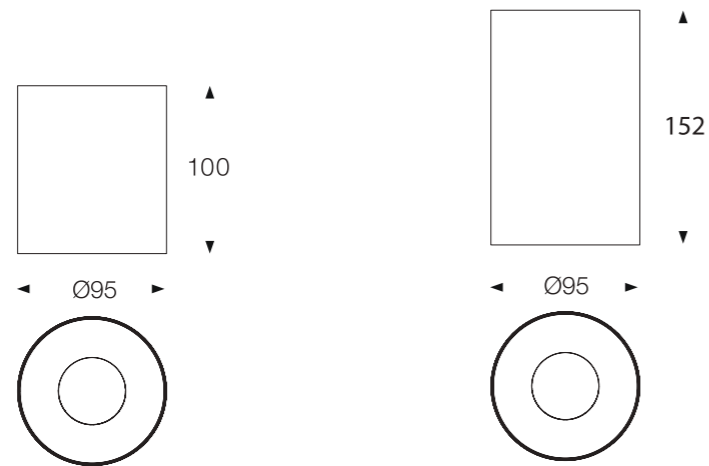

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	65
Lifetime:	>50.000h
Control:	On/Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Body color

- Matt White
- Matt Black

Reflector color

- Matt Black
- Matt White




30° rotatable right or left

SURFACE

Model:	D6405A	D6407A	D7409A	D8412A
Power:	5W	7W	9W	12W
Luminous:	375lm	525lm	675lm	900lm
Beam angle:	15°/ 24°/ 38°			

Dimensions:

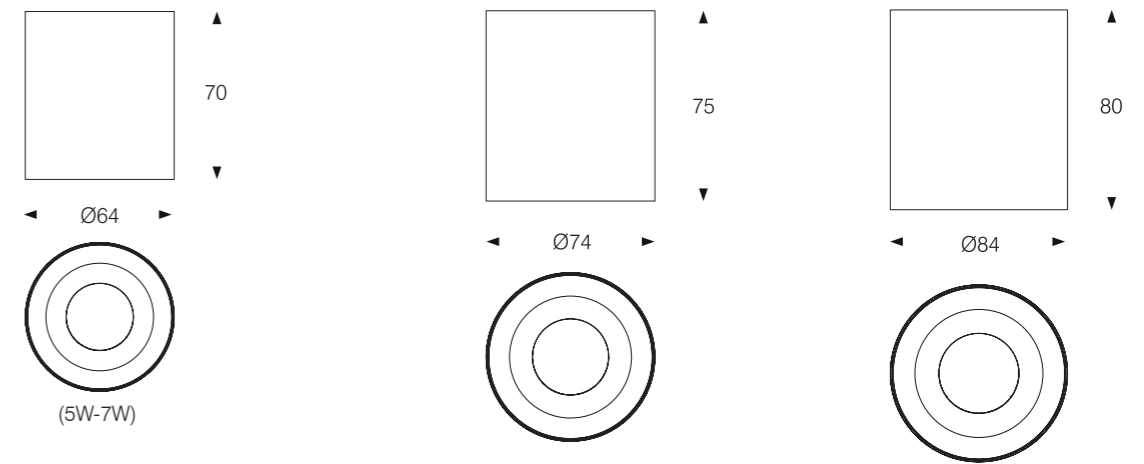

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



Body color

 Matt White


 Matt Black

Model:	B3801S
--------	--------

Power:	1W
--------	----

Luminous:	40lm
-----------	------

Dimensions:	
-------------	--

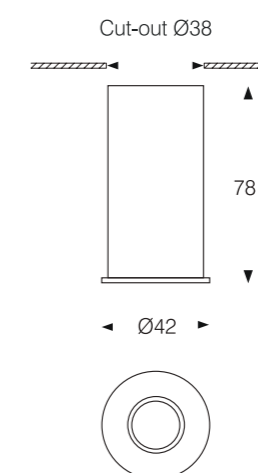

General specifications

LED:	Osram/ Cree
------	-------------

CRI(Ra):	>80
----------	-----

CCT:	2700K/ 3000K/ 4000K
------	---------------------

IP rating:	20
------------	----

Lifetime:	>50.000h
-----------	----------

Control:	On/ Off
----------	---------

Voltage:	AC220V
----------	--------



STEP LIGHT


Body color

- Matt White
- Matt Black




Model:	SR4501	SR4503
Power:	1W	3W
Luminous:	50lm	120lm

Dimensions:

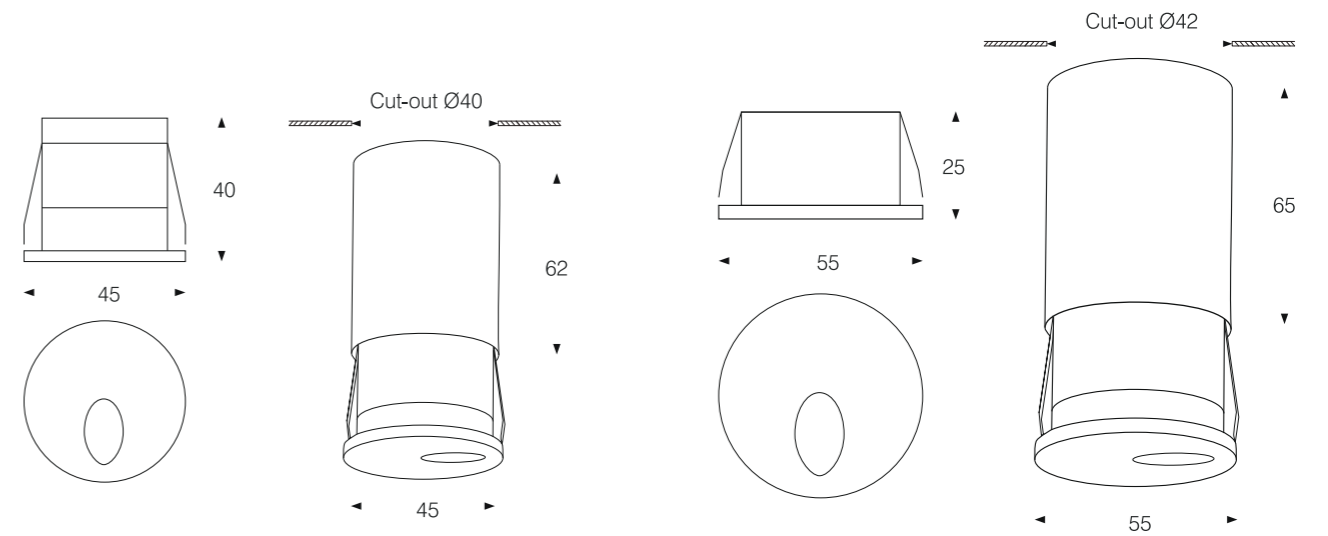

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V

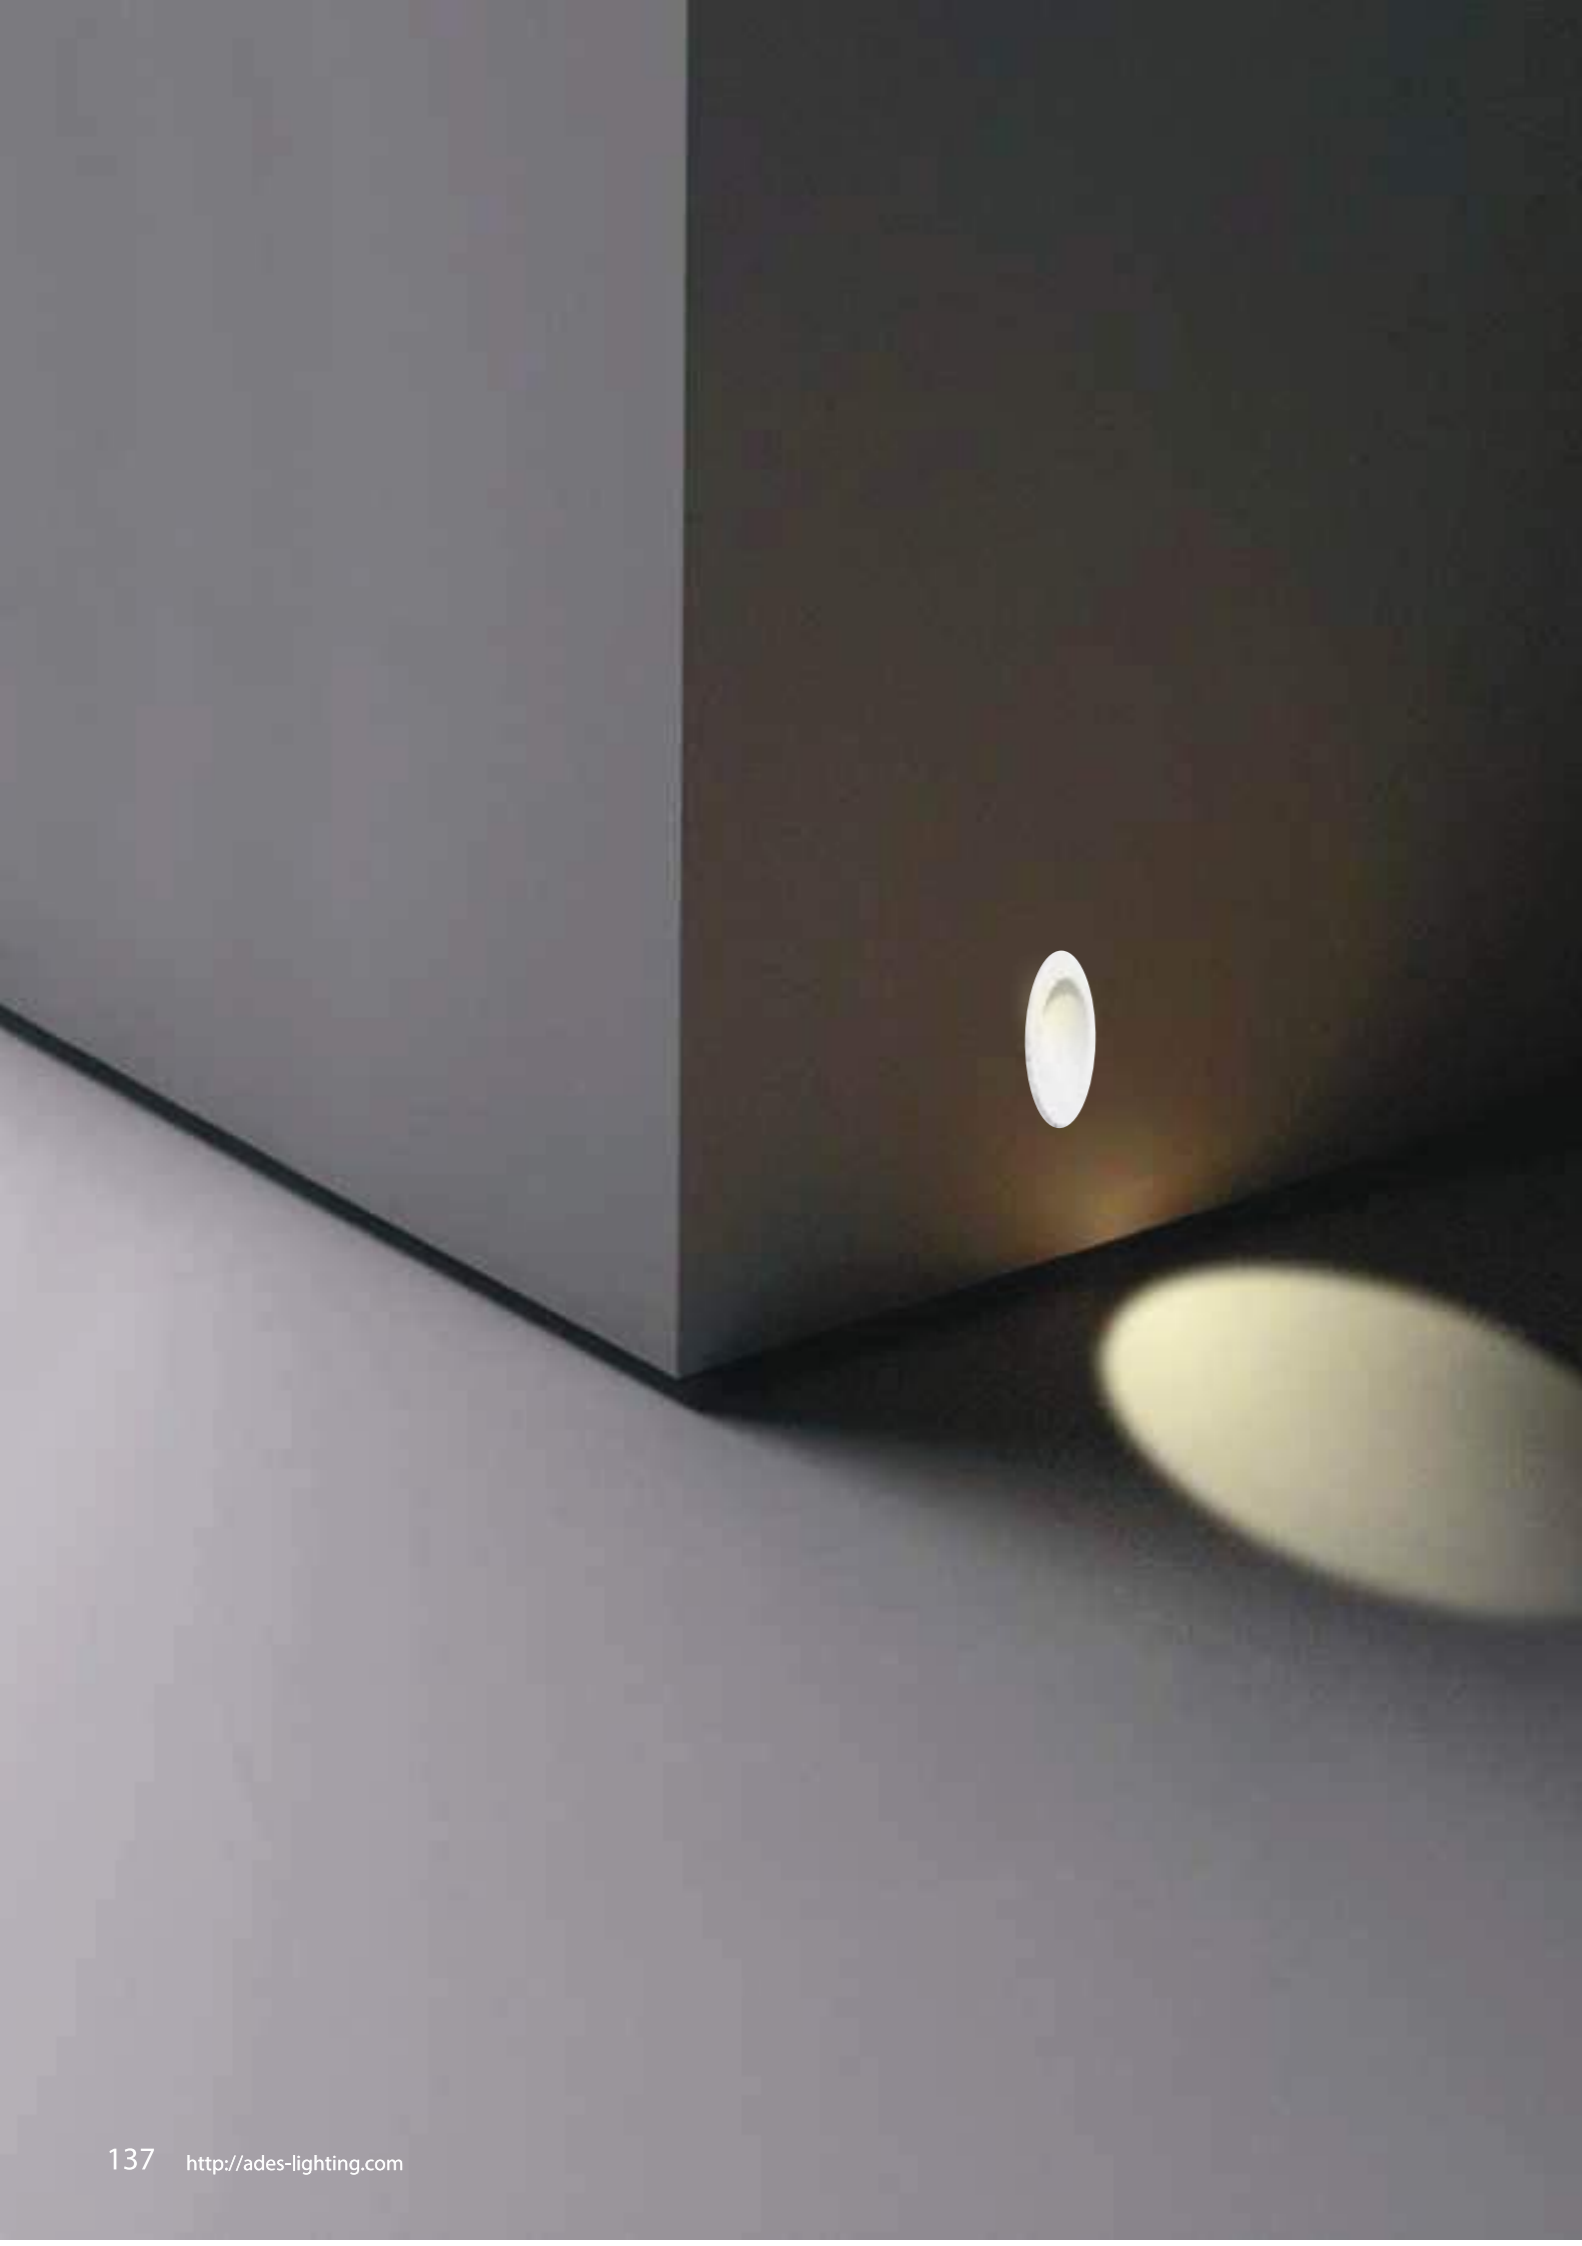

Body color

○ Matt White


● Matt Black

Model: ST8001

Power: 1W

Luminous: 50lm

Dimensions:

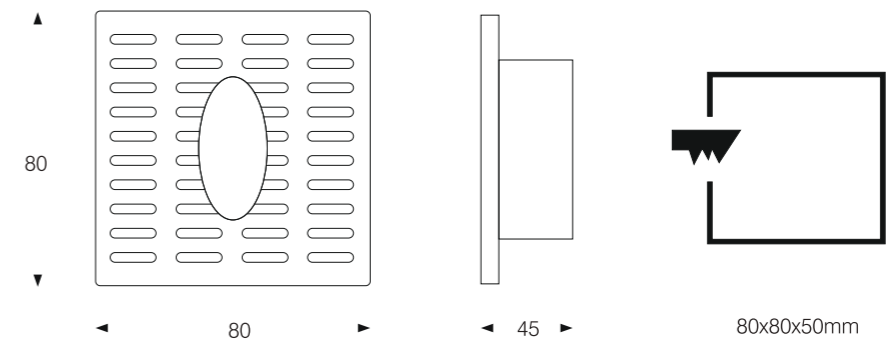

General specifications

LED: Osram/ Cree

CRI(Ra): >80

CCT: 2700K/ 3000K/ 4000K

IP rating: 20

Lifetime: >50.000h

Control: On/ Off

Voltage: AC220V



STEP LIGHT


Body color

- Matt Black
- Matt White
- Metal Grey



Model:	B9001S	B9003S
Power:	1W	3W
Luminous:	50lm	150lm

Dimensions:

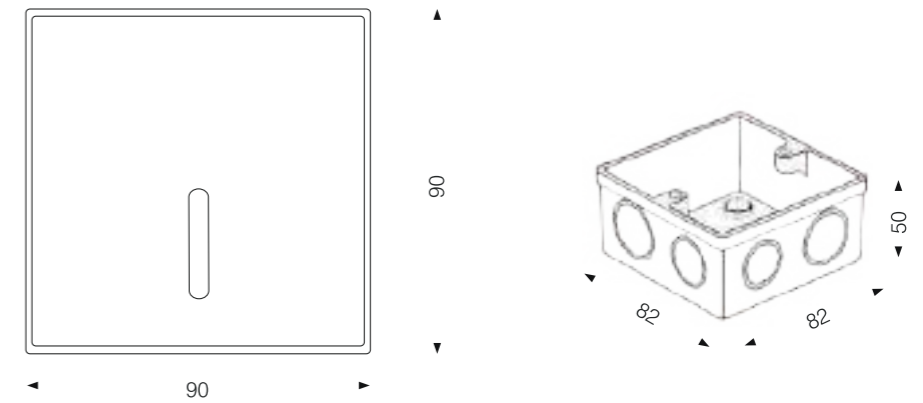

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V



STEP LIGHT

Body color

- Matt Grey
- Matt White
- Matt Black





Model: S9003-65A

S9003-65B

Power: 3W

3W

Dimensions:

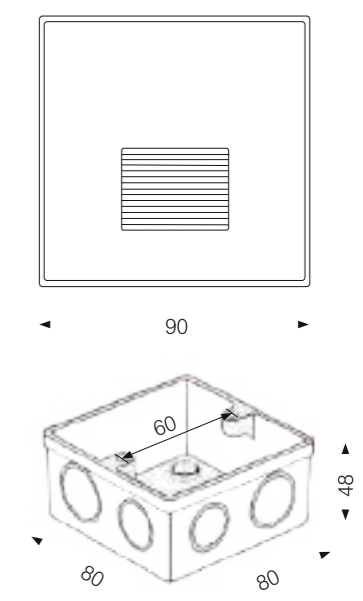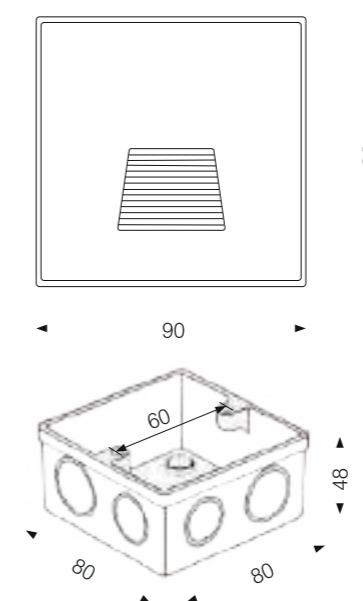

General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V



STEP LIGHT



Body color

○ Matt White

● Matt Black



Model:	S11703R	S11706R	S11803C	S11806C
Power:	3W	6W	3W	6W
Beam angle:	15°/ 24°/ 36°			
Dimensions:				

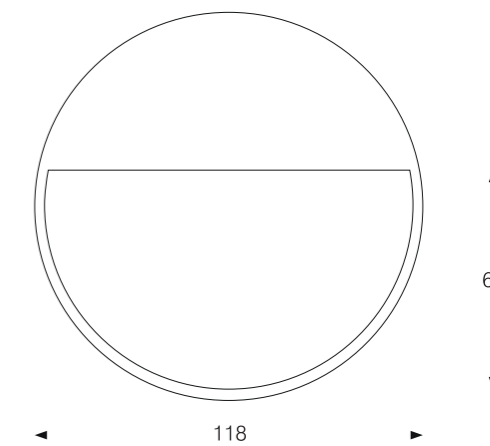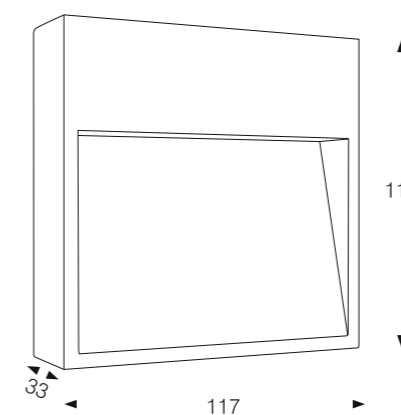

General specifications

LED:	Osram/ Cree
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V




STEP LIGHT

Body color


○ Matt White

● Matt Black

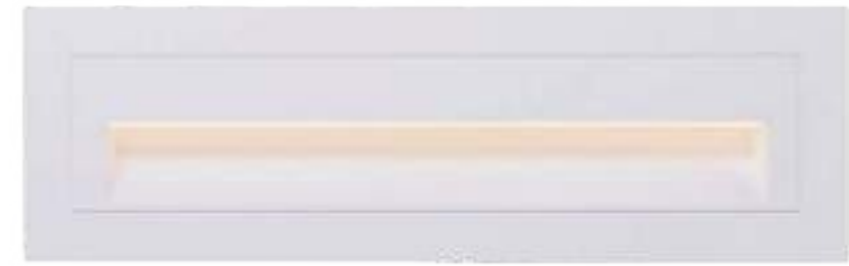

Model:	S10503-65	S21006-65
Power:	3W	6W

Dimensions:

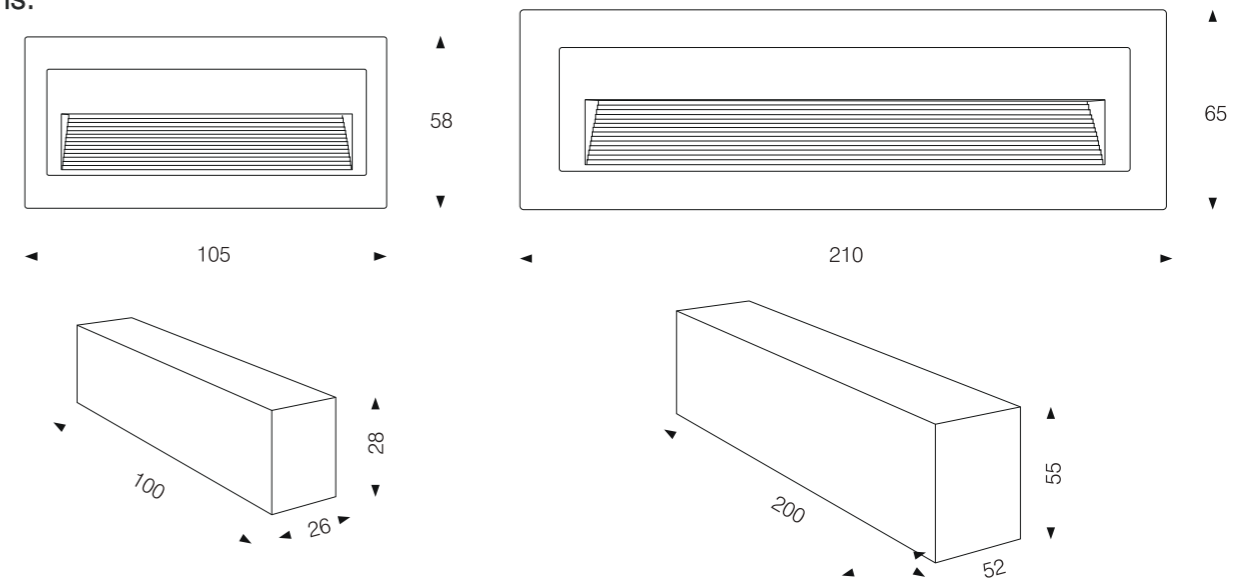

General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V



STEP LIGHT

Body color


- Matt White
- Matt Black



Model: S18503-65

Power: 3W

Dimensions:

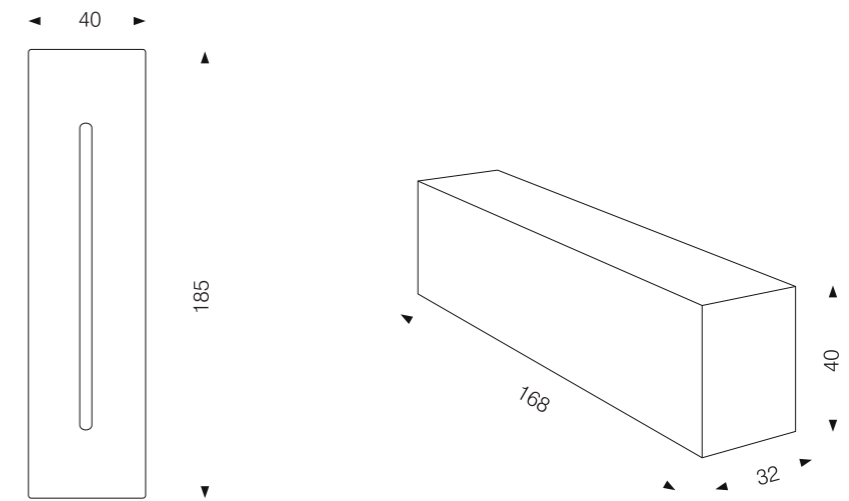

General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
CCT:	2700K/ 3000K/ 4000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

STEP LIGHT

Product characteristics

- Long life of LED light source, once construction, several years of use.
- Low power consumption, no need to pay high electricity charges for lighting and beautification.
- Waterproof, dustproof, pressure and corrosion resistance.

Body color


- Matt White
- Matt Black



Model:	S20003-20	S11003-20
---------------	-----------	-----------

Power:	3W	3W
---------------	----	----

Dimensions:

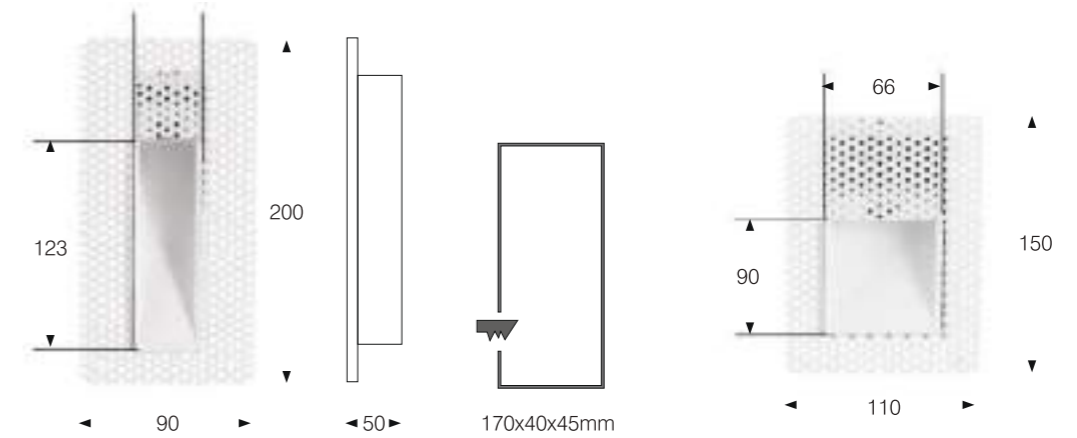

General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
CCT:	2700K/ 3000K/ 4000K
IP rating:	20/ 65
Lifetime:	>50.000h
Control:	On/ Off
Voltage:	AC220V/ DC24V

In the dark,
there will always be a ray of dawn for you.



Body color


○ Matt White

● Matt Black

Model: S7501-03RL

Power: 3W

Dimensions:

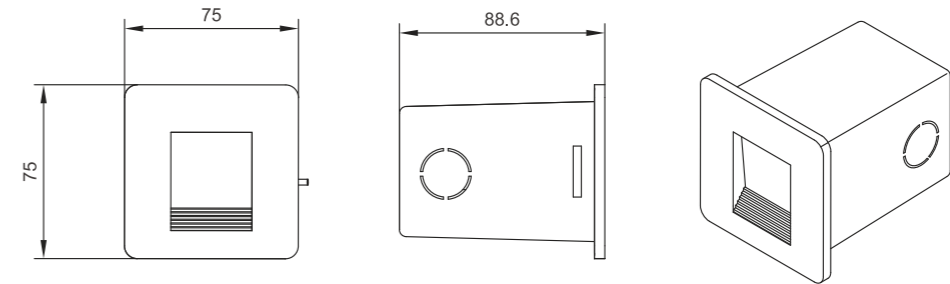

General specifications

LED: Osram/ Cree

CRI(Ra): > 85

CCT: 2700K/ 3000K/ 4000K

IP rating: 66

Lifetime: >50.000h

Control: On/ Off

Voltage: AC220V/ DC24V



Body color


Matt White

Matt Black

Model: S7001-03RL

Power: 3W

Dimensions:

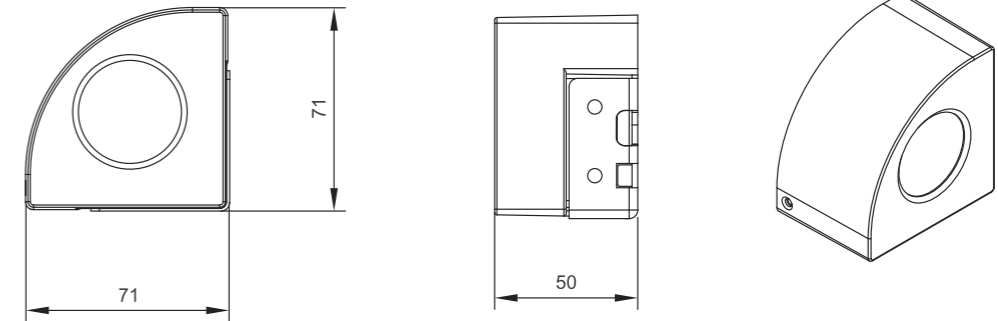

General specifications

LED: Osram/ Cree

CRI(Ra): > 85

CCT: 2700K/ 3000K/ 4000K

IP rating: 66

Lifetime: >50.000h

Control: On/ Off

Voltage: AC220V/ DC24V




ALUMINUM BLENDING



- PC cover Surface color
- Milky white Matt Black
 - Black Matt White
 - Acrylic matte

Model: AB5035T - L2000 AB5035T - R300 AB5035T - R500 AB5035T - R700

Dimensions:

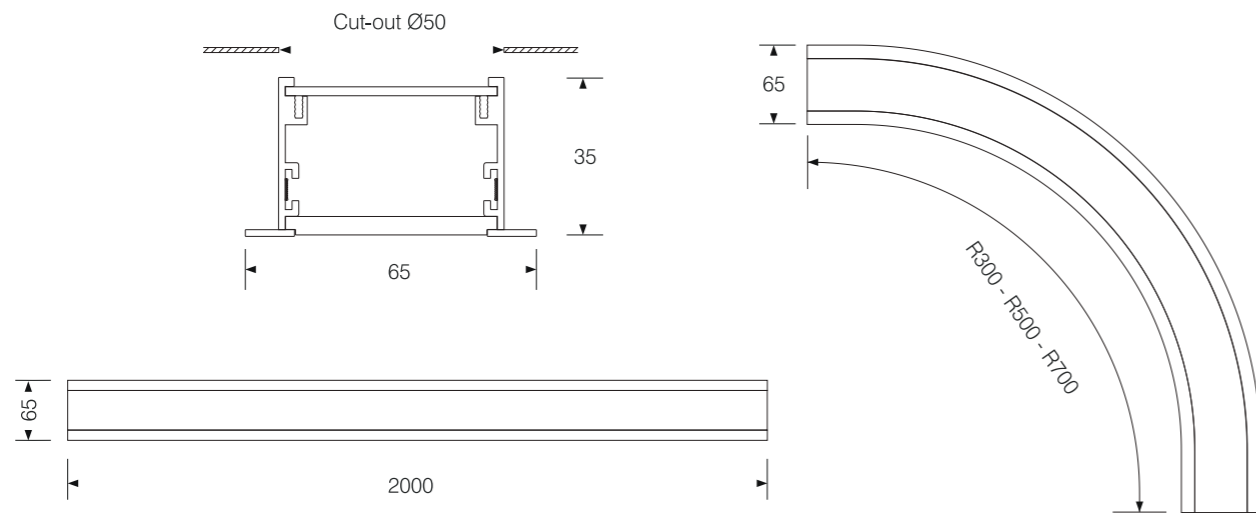


ALUMINUM BLENDING




- PC cover Surface color
- Milky white Matt Black
 - Black Matt White
 - Acrylic matte

Model: AB5035U - L2000 AB5035U - R300 AB5035U - R500 AB5035U - R700


Dimensions:

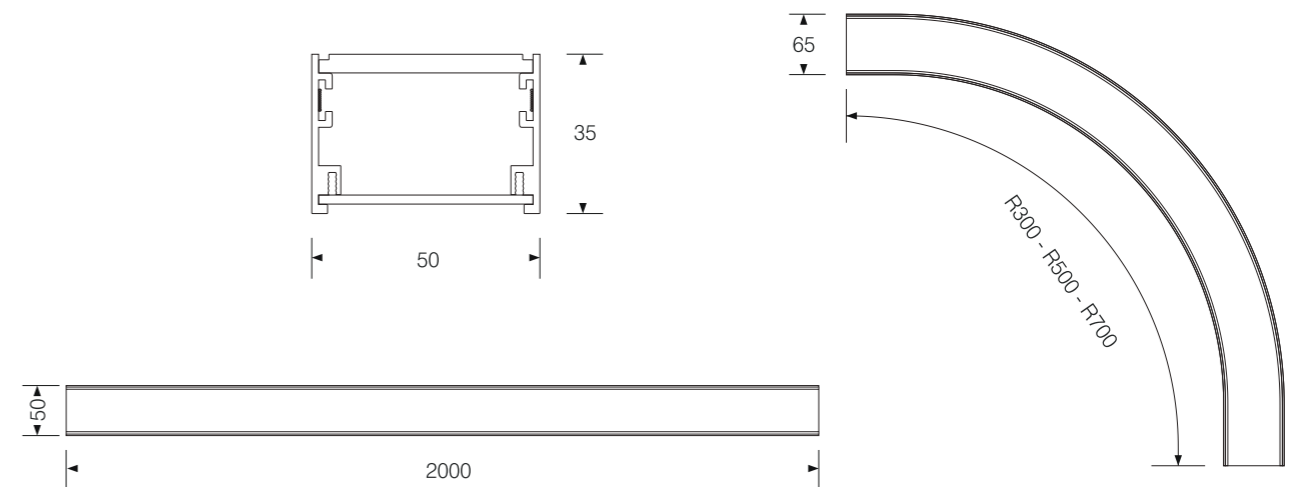

- Surface color
- Matt Black
 - Matt White
- PC cover
- Milky white
 - Black
 - Acrylic matte

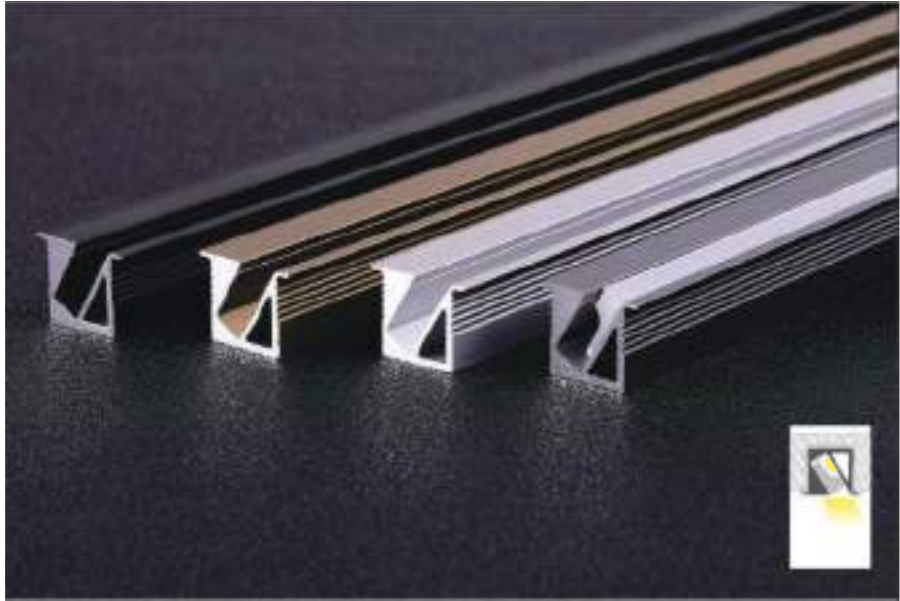


- Surface color
- Matt Black
 - Matt White
- PC cover
- Milky white
 - Black
 - Acrylic matte

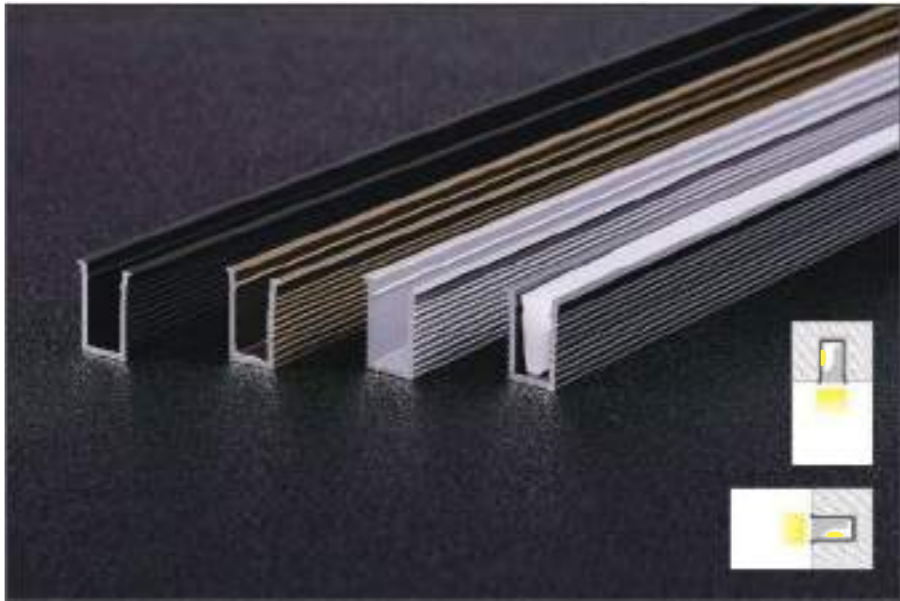


Model: TN1210

Dimensions:

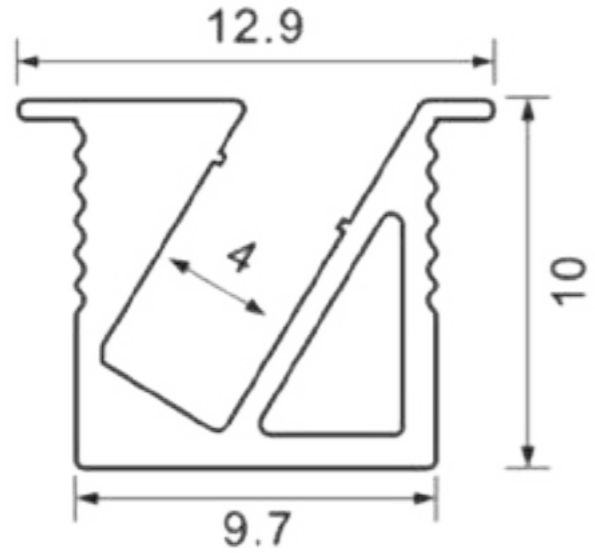

Model: TN0709

Dimensions:

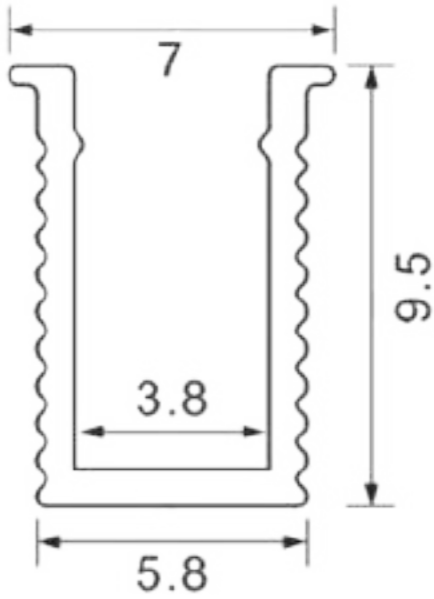

Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte




Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

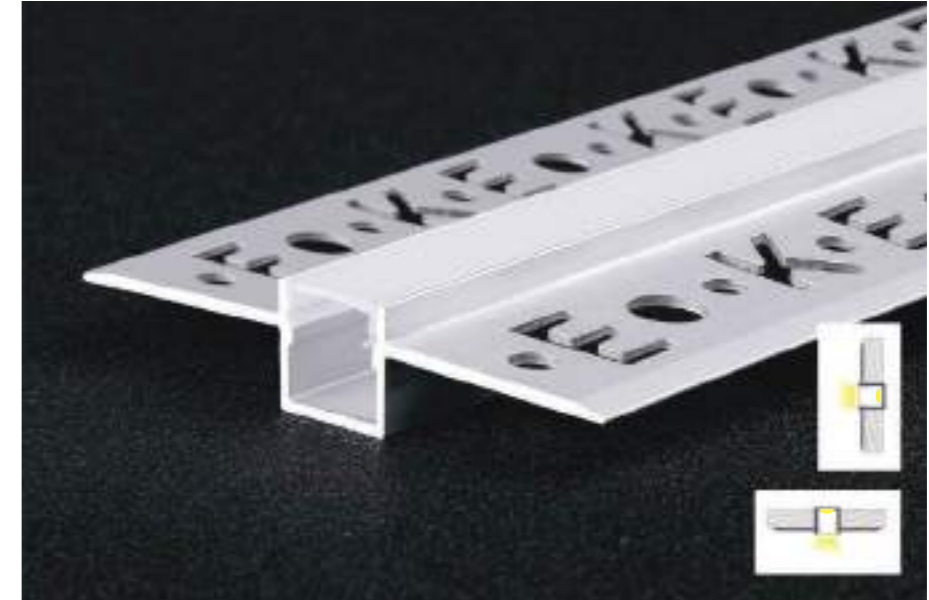


Model: ATG3010

Dimensions:

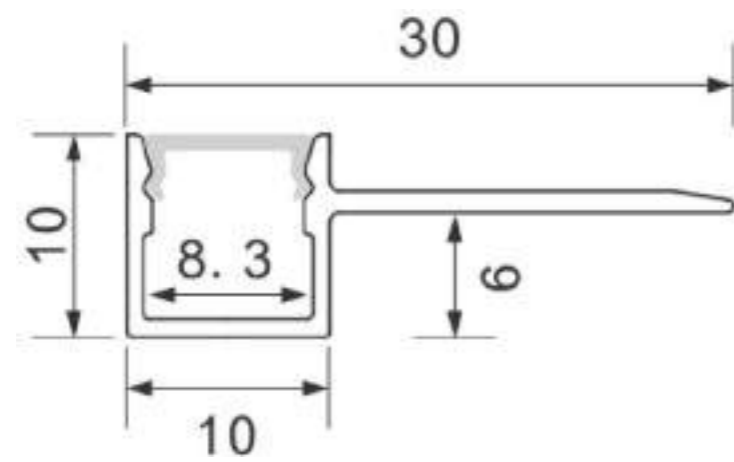

Model: AT5010

Dimensions:

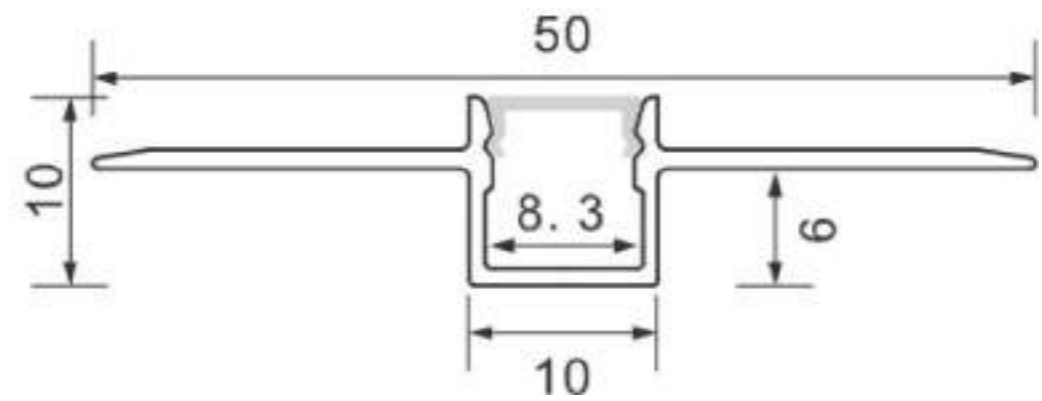


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

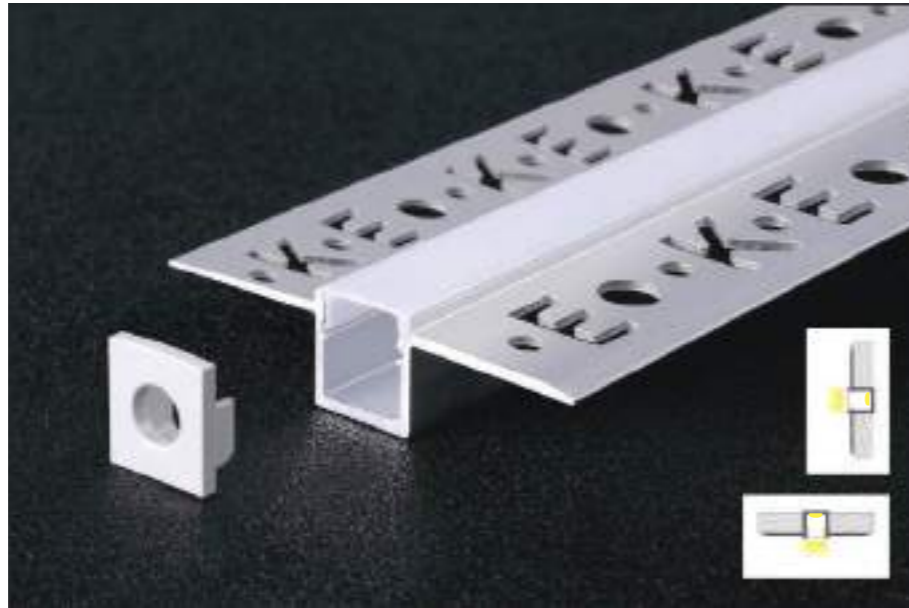


Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

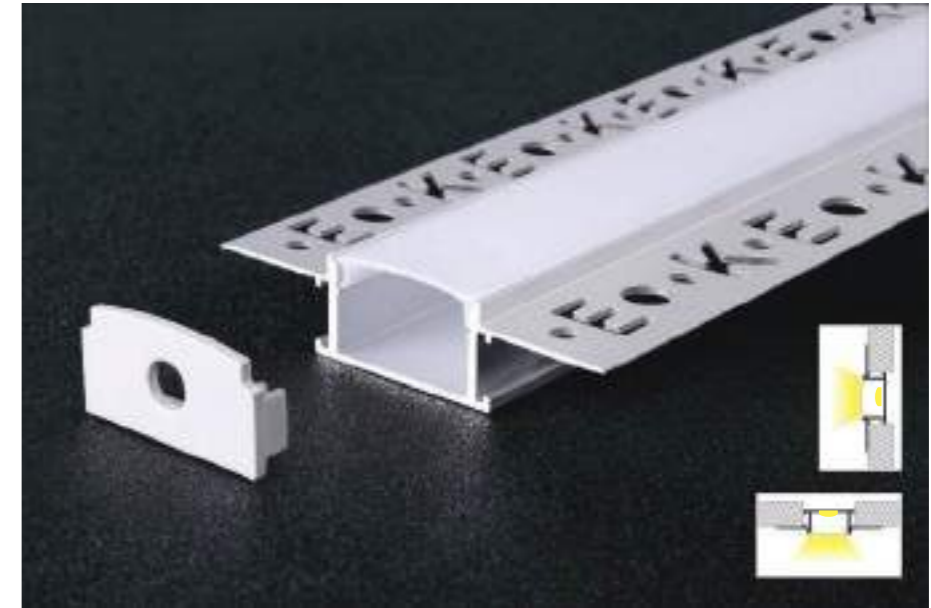


Model: AT5213

Dimensions:

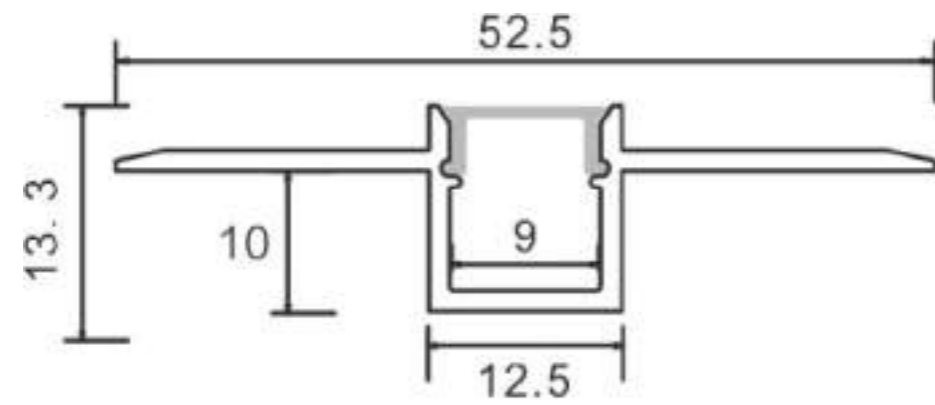

Model: AT6114

Dimensions:

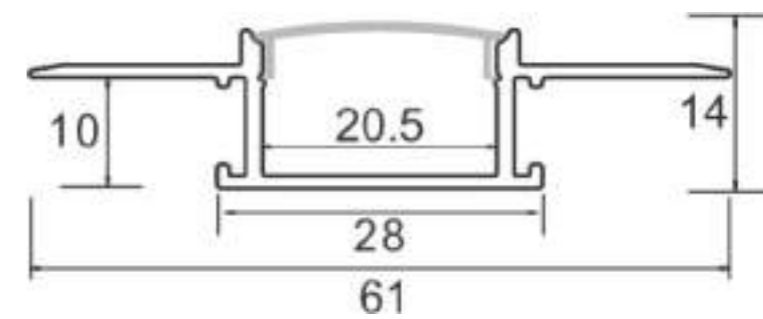


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

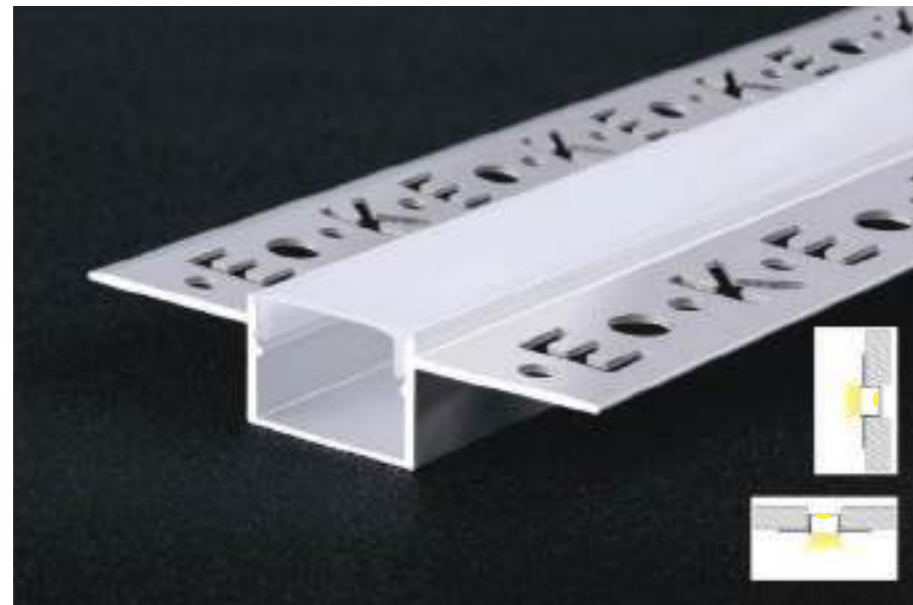


Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

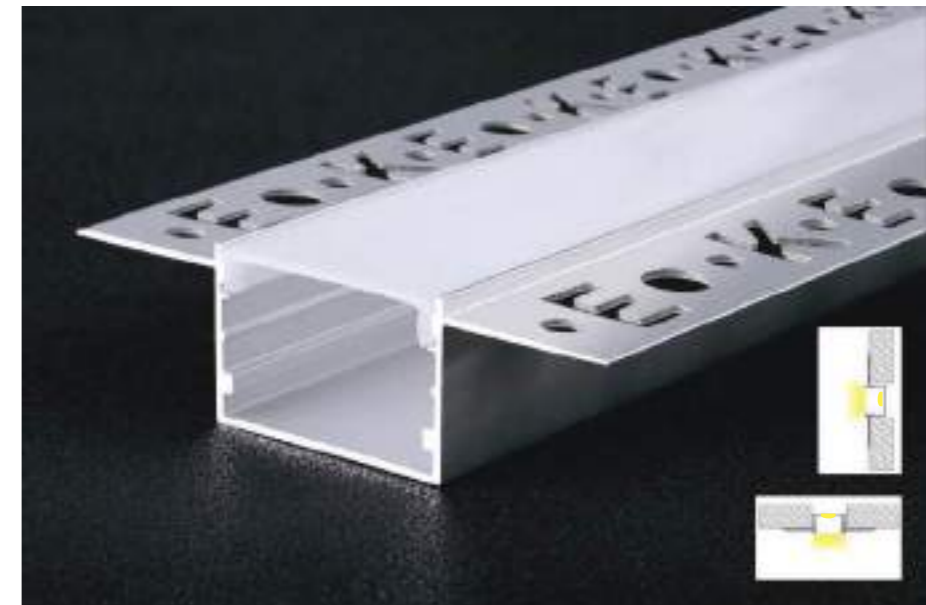


Model: AT6013

Dimensions:

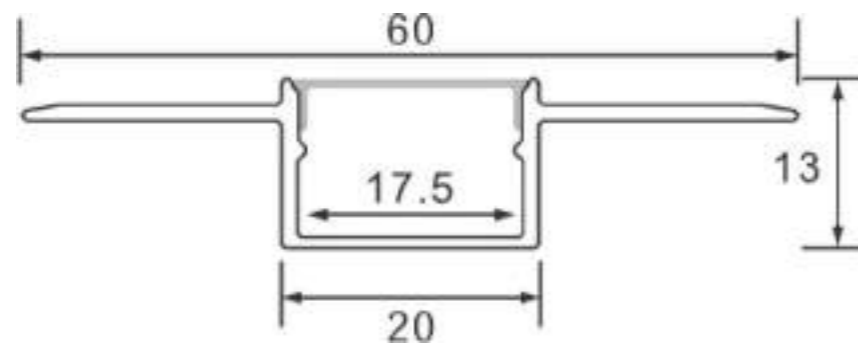

Model: AT7020

Dimensions:

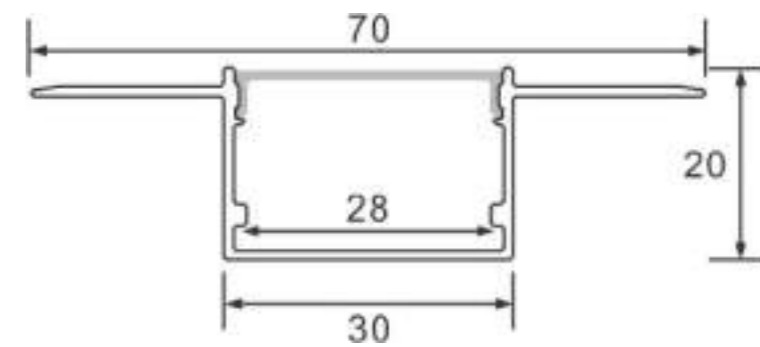


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

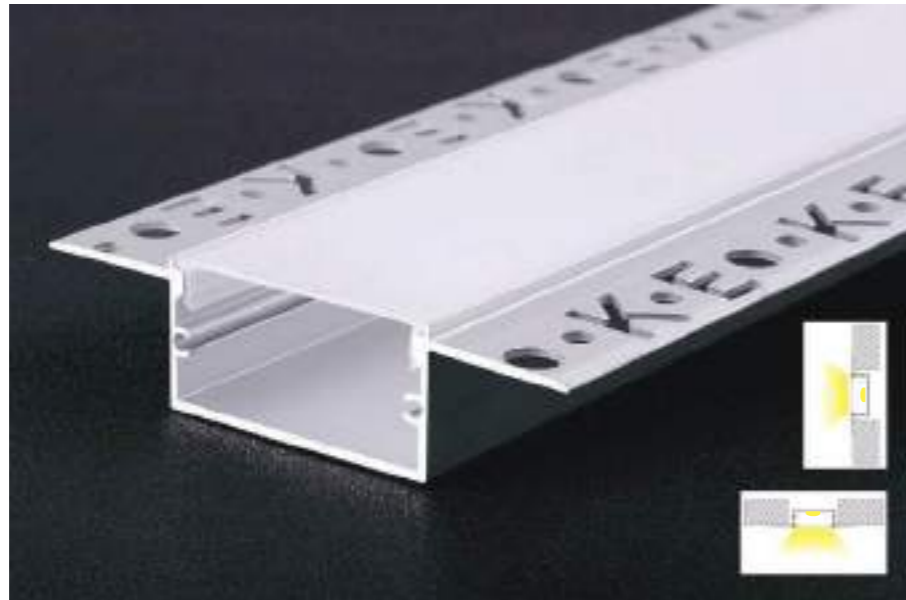


Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

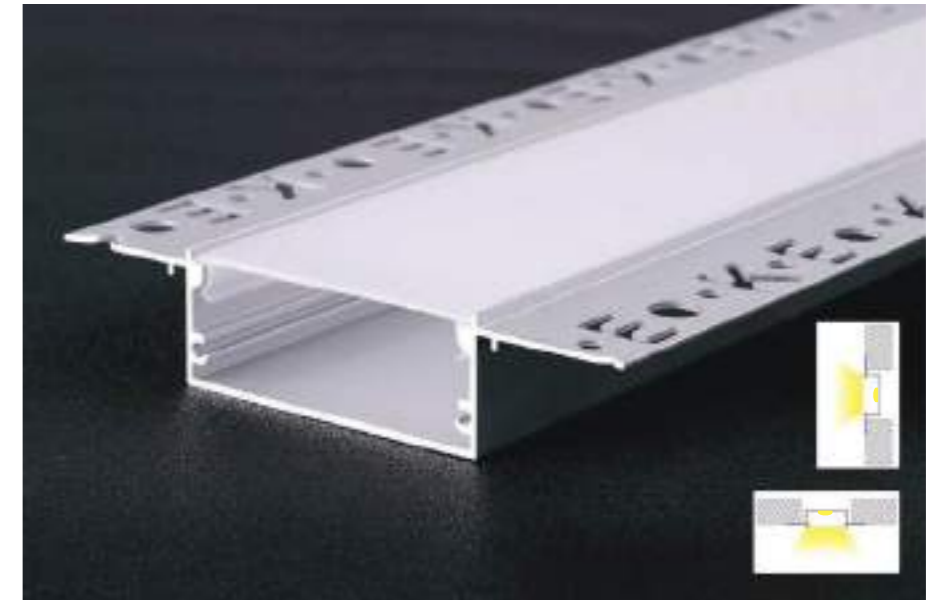


Model: AT8020

Dimensions:

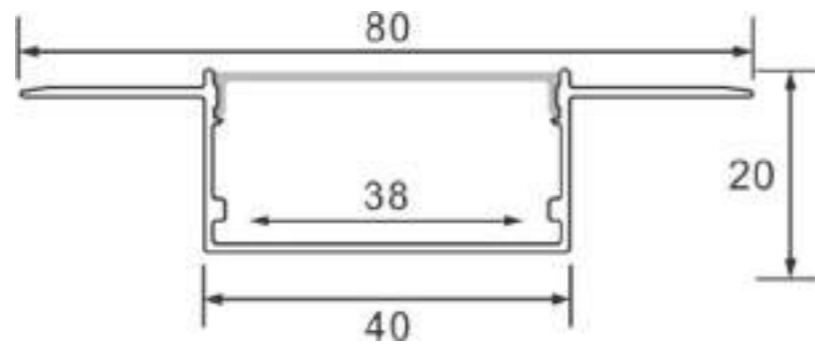

Model: AT9620

Dimensions:

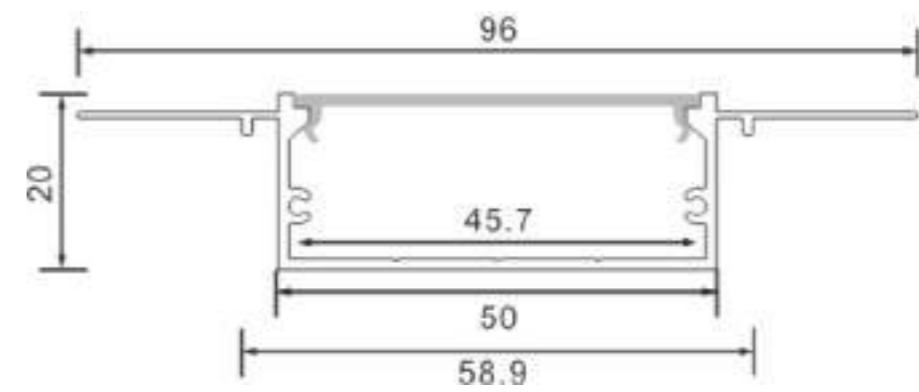


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

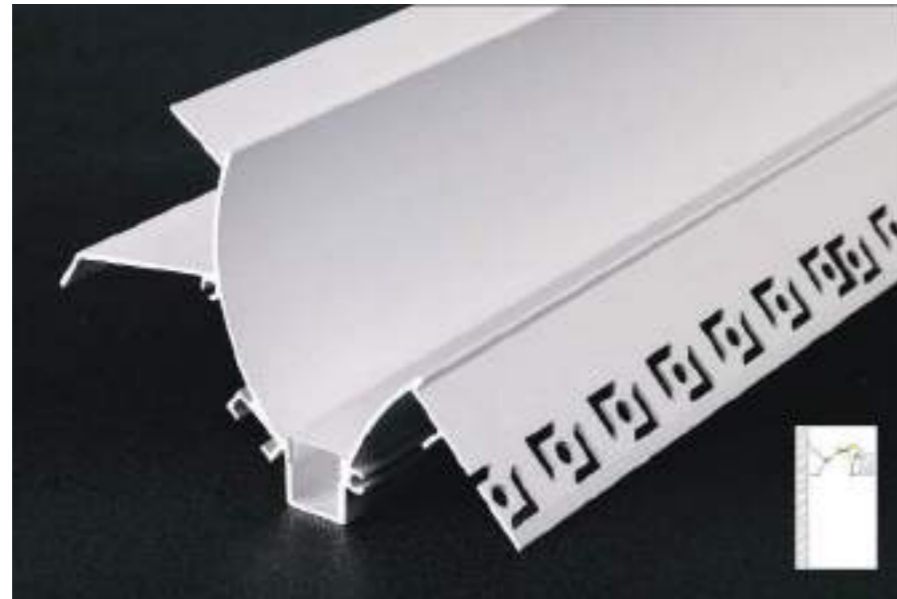

Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte




Model: HG6850

Dimensions:

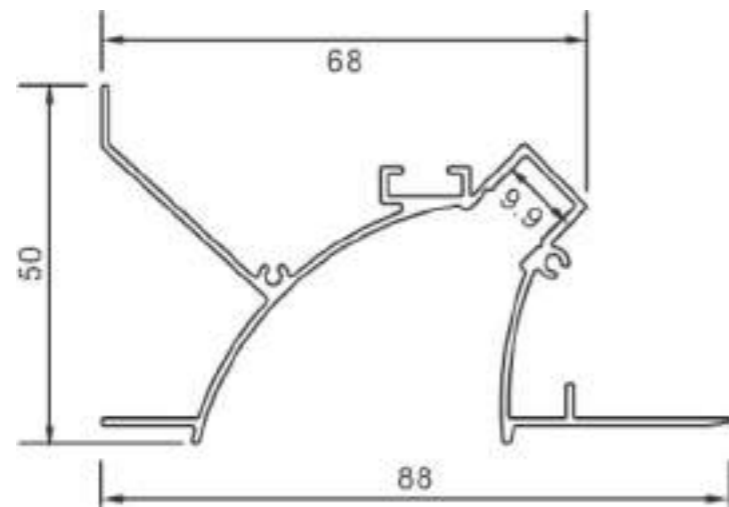

Model: HG7158

Dimensions:

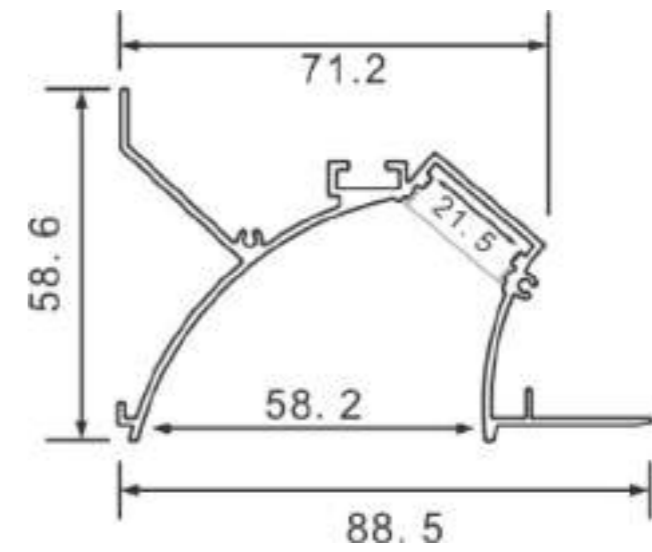


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

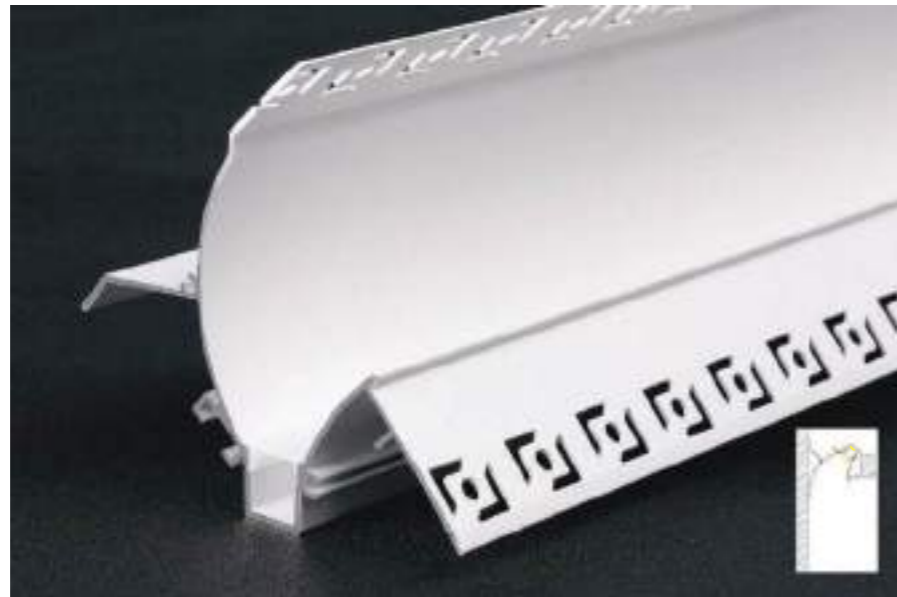


Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

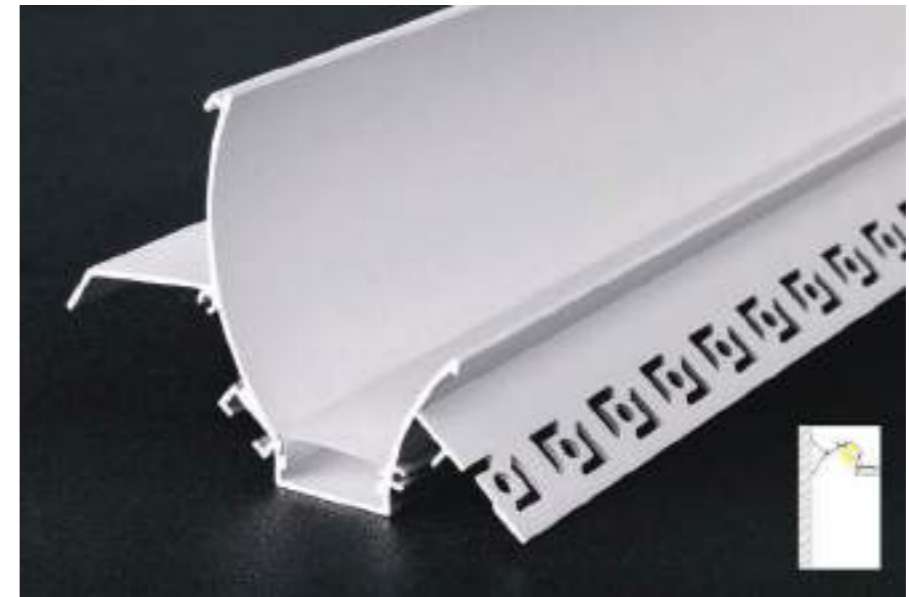


Model: HG5870



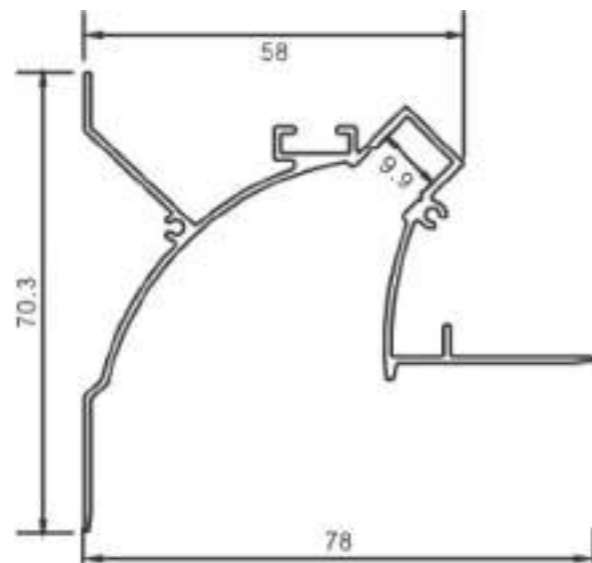



Dimensions:

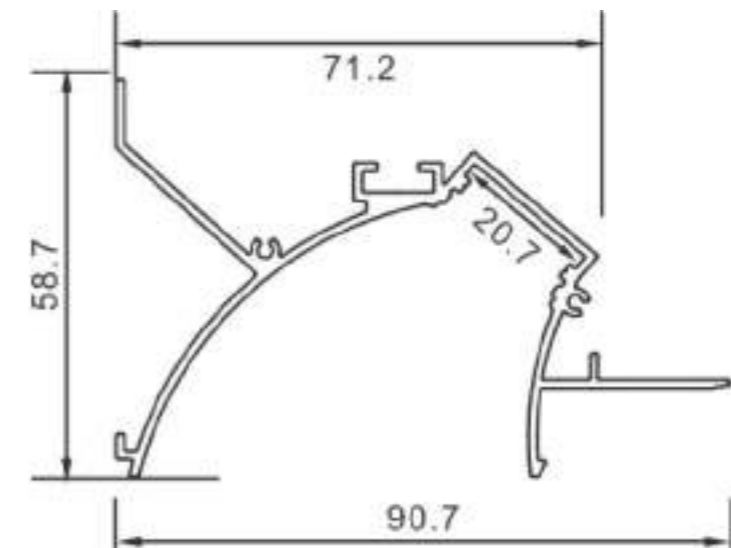


Model: HG7190

Dimensions:






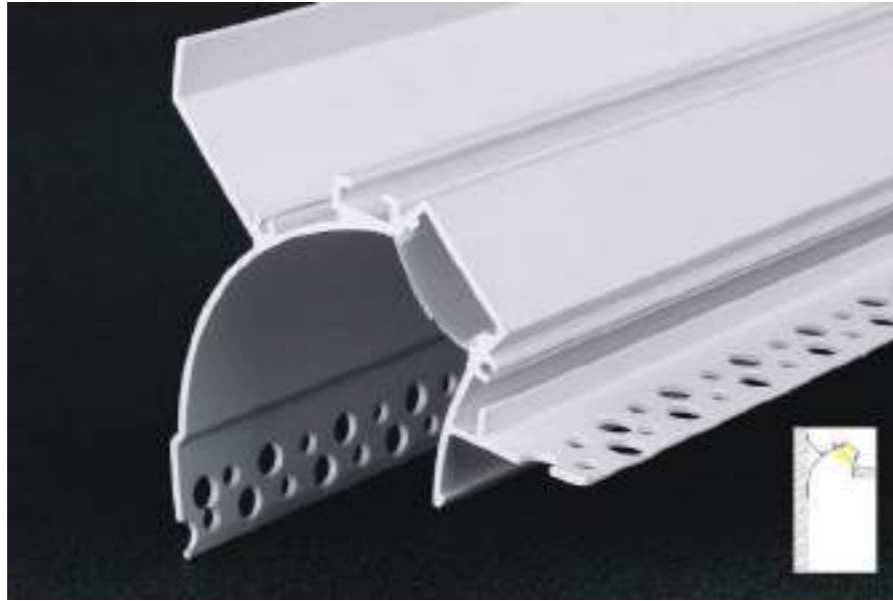



- Surface color
-  Silver
 -  Black
 -  White Anodized
- PC cover
-  Milky white
 -  Black
 -  Acrylic matte

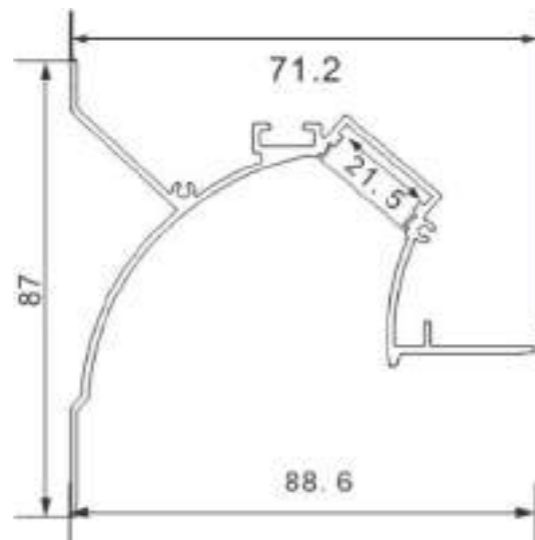


Model: HG7187

Dimensions:




- Surface color
-  Silver
 -  Black
 -  White Anodized
- PC cover
-  Milky white
 -  Black
 -  Acrylic matte

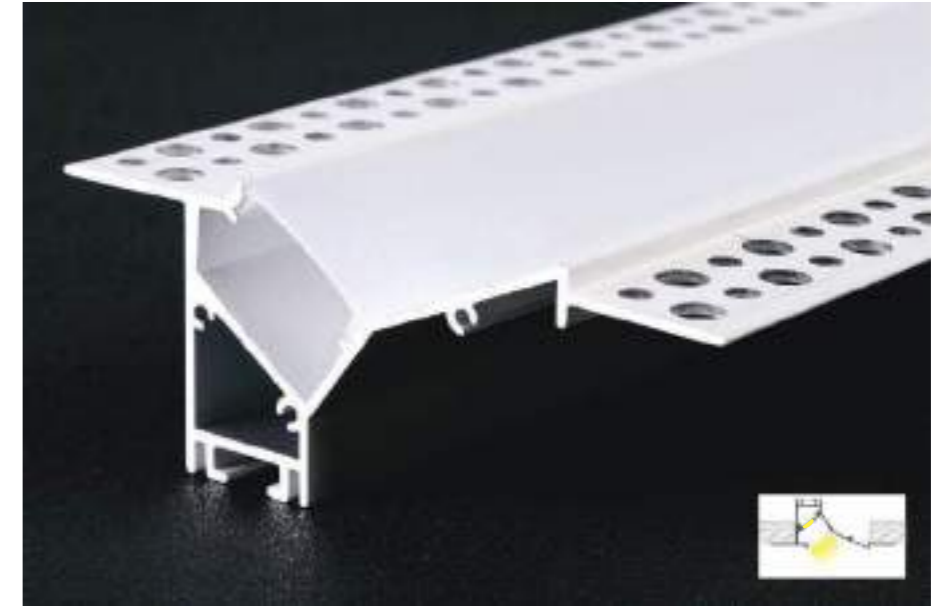

Model: HG5538

Dimensions:

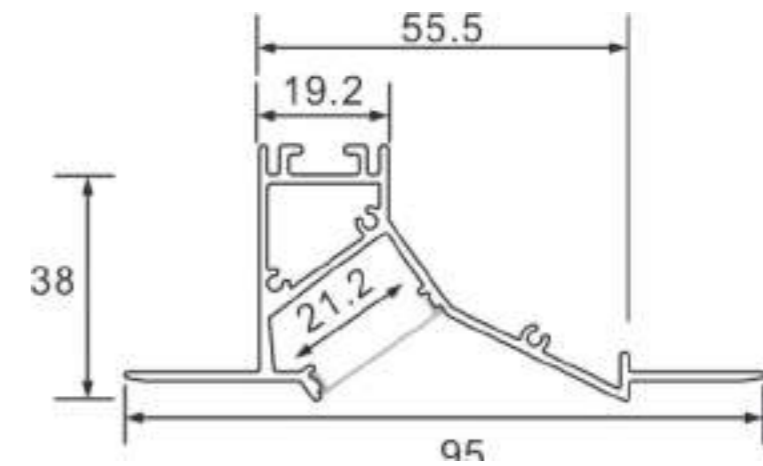


Surface color

- Matt Black
- Matt White

PC cover

- Milky white
- Black
- Acrylic matte

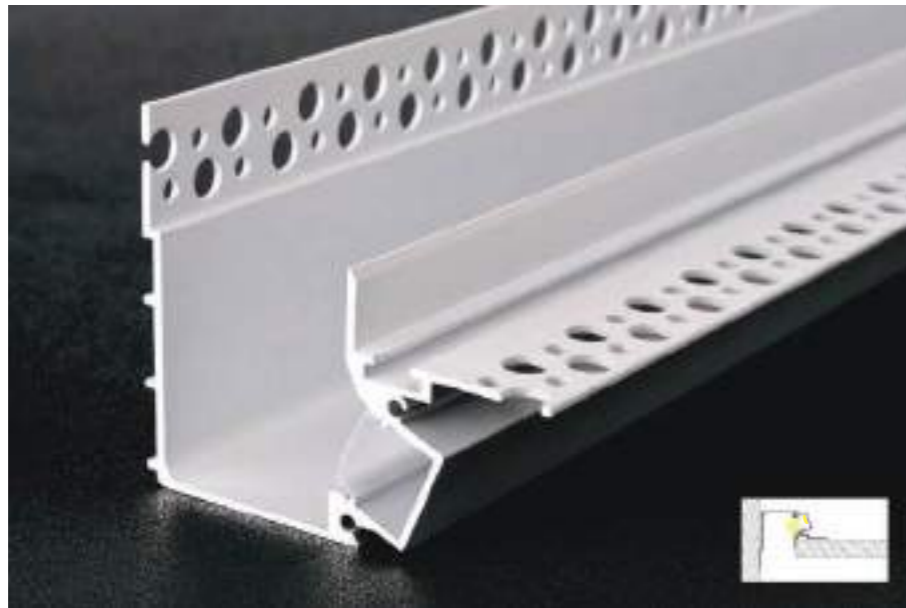


Surface color

- Matt Black
- Matt White


PC cover

- Milky white
- Black
- Acrylic matte

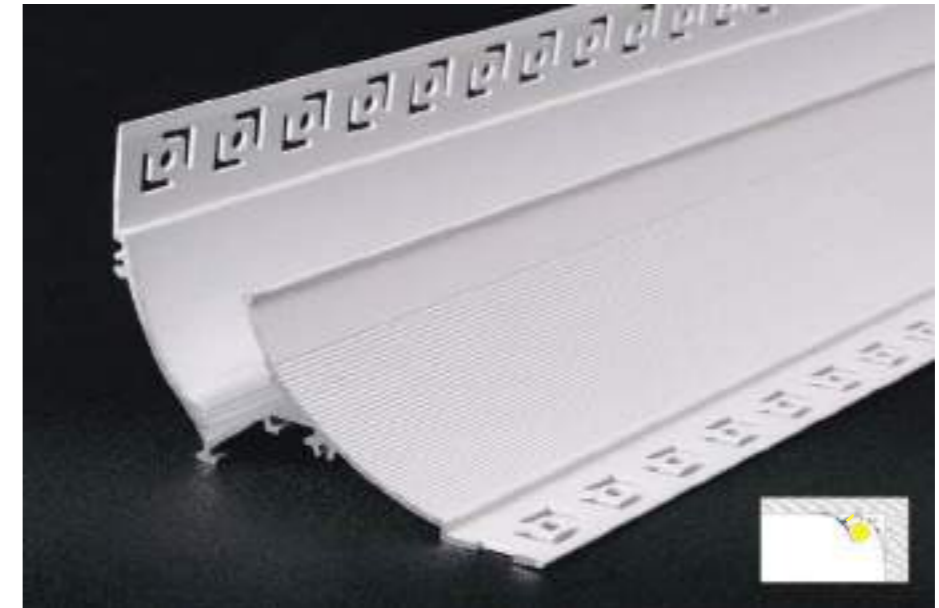


Model: HG7563

Dimensions:

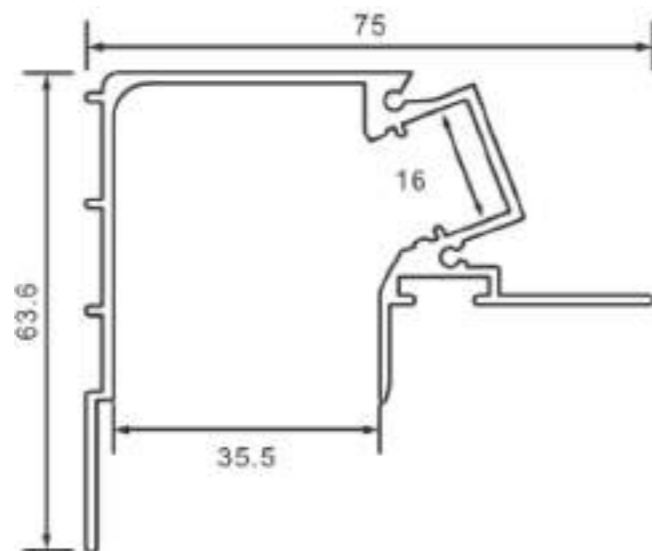

Model: HG9758

Dimensions:

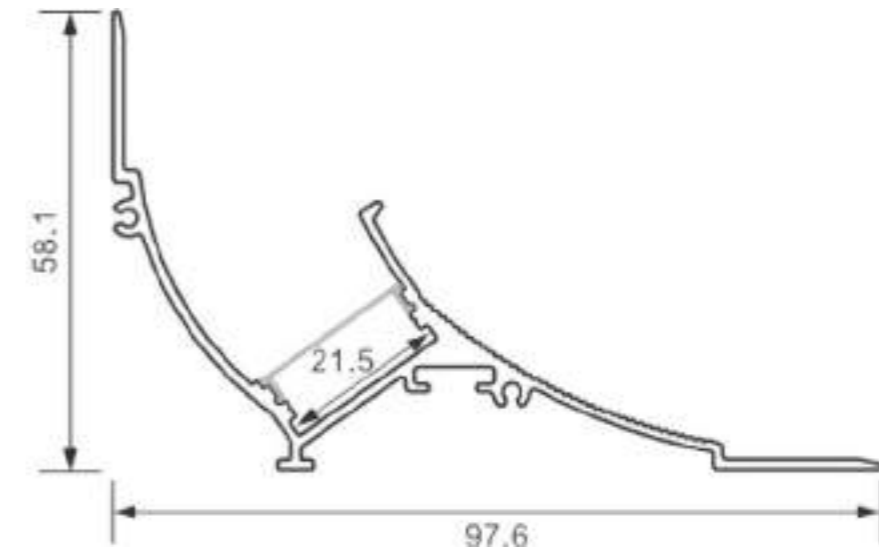




ART TRACK LIGHT

- Spot shaping/ Zoomable/ Projection/ Smart control

- Track Support

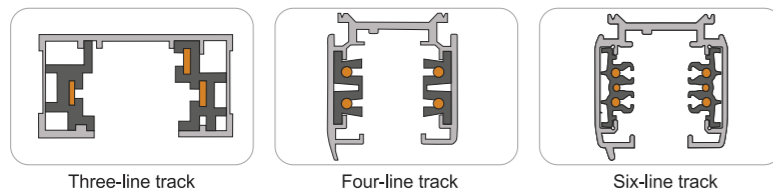

- Installation effect



- Spot effect



Control support



Support 1-10V, DMX, DALI, ZGEBI, and other mainstream control. Can also be connected with Huawei, Tuya, Xiaomi, Tmall Elf, Amazon, Google, and other smart AI control systems.

Projection support



Human Projection Landscape physical projection Logo icon projection Marketing projection Food projection

A-SERIES



Industrial Grade Optical Filter

It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.



Diffuser



ND filter



Color filter



CPL filter



UV filter




GND filter

Color filter



The luminous color of the lamp can be adjusted according to your needs.

ND filter

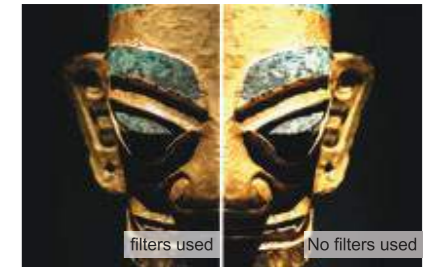

With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

CPL filter



It can eliminate the reflection of the object's surface so that the object in a high luminosity environment can also display its original appearance.

GND filter



GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T6510A-4536	T6510B-4525
Power:	10W	10W
Luminous:	300-350lm	300-350lm
Beam angle:	Zoom 25°-36°	Zoom 15°-25°
Dimensions:		

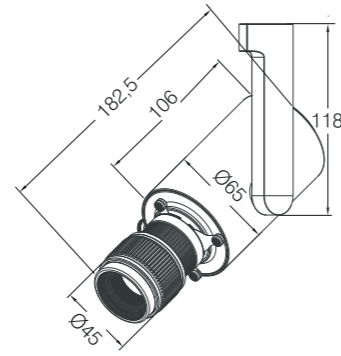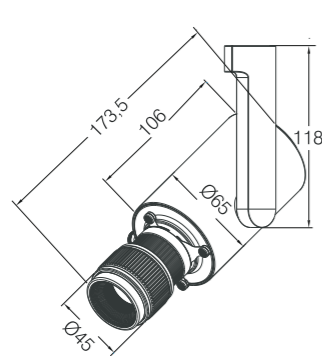

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T7520A-7536	T7520A-7525
Power:	20W	20W
Lumini-:	650-750lm	650-750lm
Beam angle:	zoom 20°-36°	zoom 15°-25°
Dimensions:		

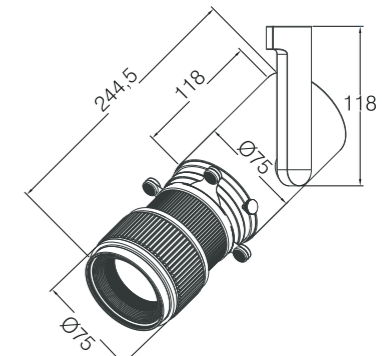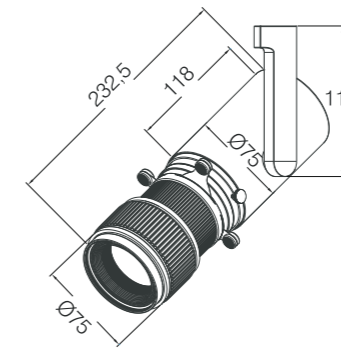

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T8530A-7536	T8530A-7525
Power:	28W	28W
Luminous:	800-850lm	800-850lm
Beam angle:	Zoomable 20°-36°	Zoomable 15°-25°
Dimensions:		

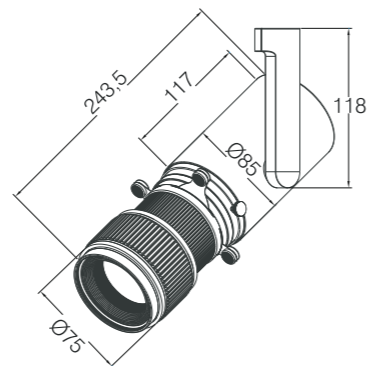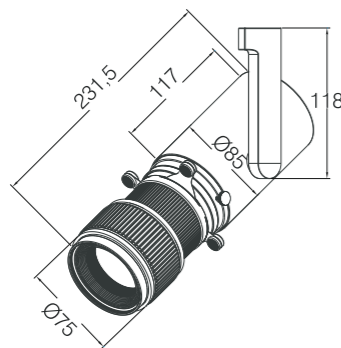

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T9540A-7536	T9540A-7525
Power:	37W	37W
Luminous:	1050-1200lm	1050-1200lm
Beam angle:	Zoomable 20°-35°	Zoomable 15°-25°
Dimensions:		

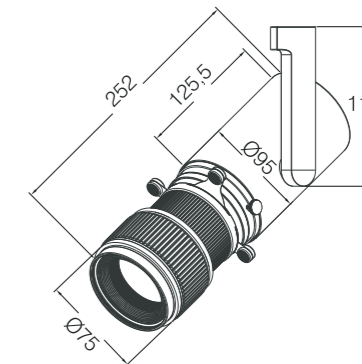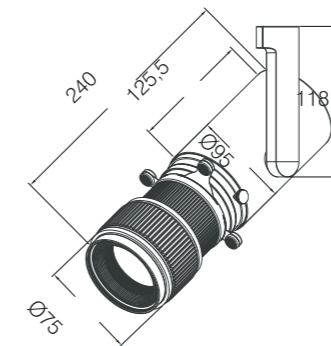

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

Color filter



The luminous color of the lamp can be adjusted according to your needs.

ND filter



With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

CPL filter



It can eliminate the reflection of the object's surface so that the object in a high luminosity environment can also display its original appearance.

GND filter



GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.



Industrial Grade Optical Filter
 It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.



ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T6510B-3635	T6510B-3645
Power:	10W	10W
Luminous:	300-350lm	300-350lm
Beam angle:	Zoomable 20°-35°	Zoomable 25°-45°
Dimensions:		

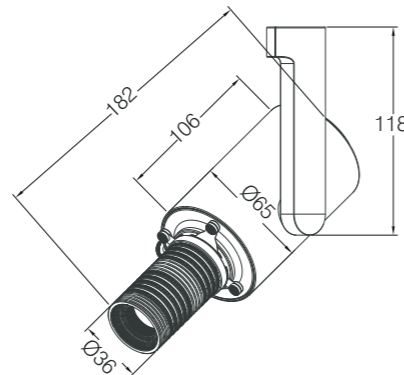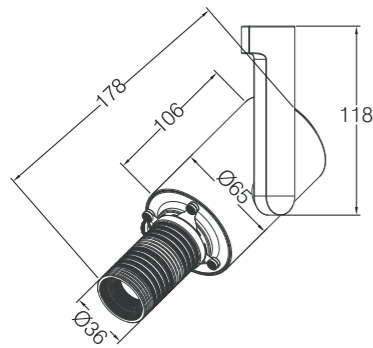

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Options:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track/ 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T7520B-6025	T7520B-6036
Power:	20W	20W
Luminous:	650-750lm	650-750lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°
Dimensions:		

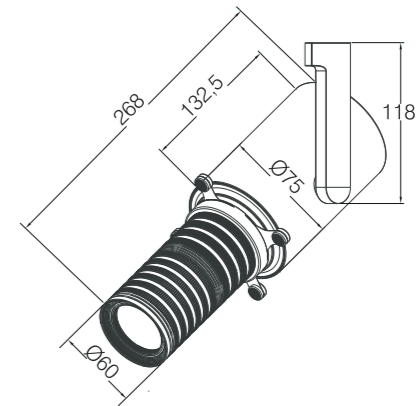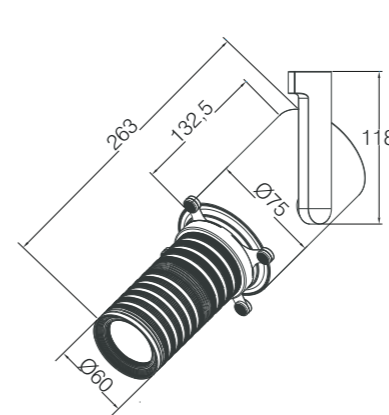

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track/ 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T8530B-6025	T8530B-6036
Power:	28W	28W
Luminous:	850-950lm	850-950lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°
Dimensions:		

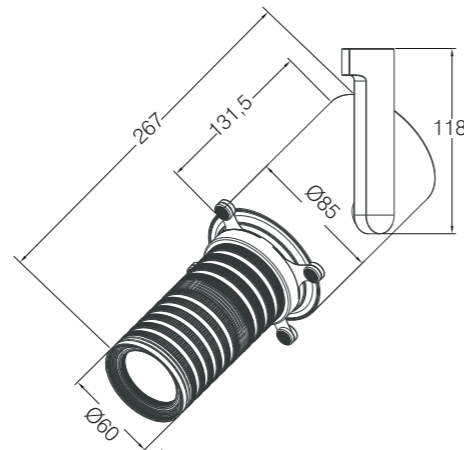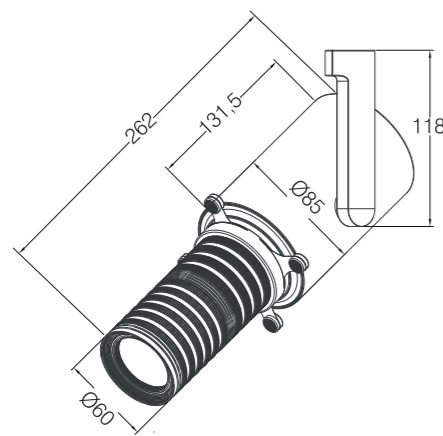

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T9540B-6025	T9540B-6036
Power:	37W	37W
Luminous:	1050-1200lm	1050-1200lm
Beam angle:	Zoomable 15°-25°	Zoomable 20°-36°
Dimensions:		

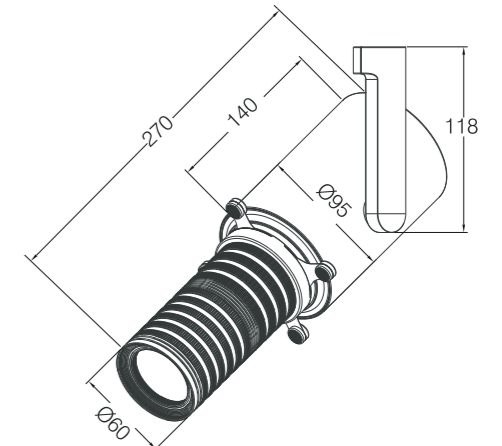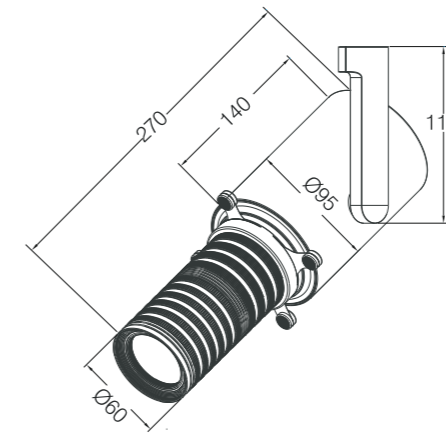

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

C-SERIES



Diffuser



Color filter



ND filter



CPL filter




UV filter

GND filter

Industrial Grade Optical Filter

It can match a variety of industrial-grade optical filters and support the customization of special narrowband and ultra narrowband optical filters. Some filter functions can be superimposed, such as HD UV+color filter, HD UV+soft filter, amongst others.

ND filter

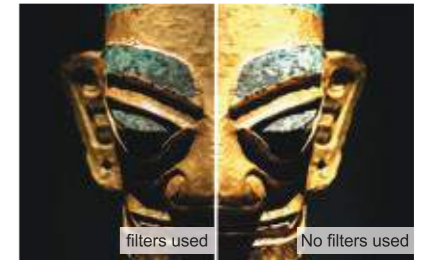

With electronic dimming, the small-angle illumination can be reduced to less than 75LUX, which is generally used for authentic lighting.

UV filter



It can effectively filter UV rays in LED lamps and lanterns, thus protecting the illuminated object. It delivers superior performance in silk products lighting and cultural relics lighting.

CPL filter




It can eliminate the reflection of the CPL filter so that the object in a high luminosity environment can also display its original appearance.

GND filter



GND filter are used to alter the light ratio into the lens. For example, in illuminating the oblique side of the square position of the object, the use of gradient filters allows the even and constant illumination of the object.

Color filter

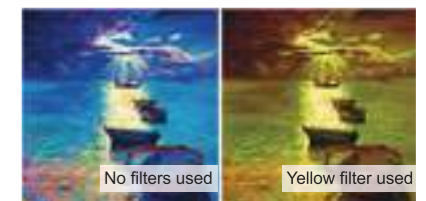

The luminous color of the lamp can be adjusted according to your needs.



Body color

Matt Black

Matt White



Reflector color

Matt White

Matt Black



Model:	T7520C-4855	T7520C-4840
Power:	20W	20W
Luminious:	650-800lm	650-800lm
Beam angle:	55°	40°
Dimensions:		

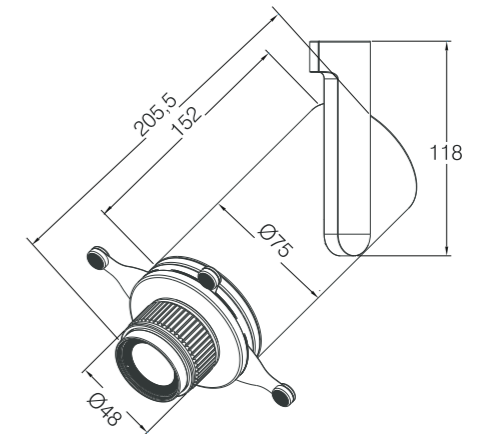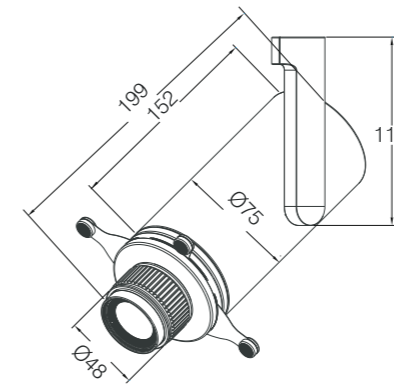

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color


Matt Black

Matt White


Reflector color

Matt White

Matt Black

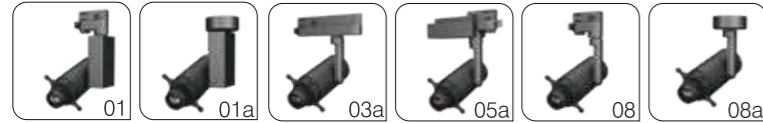

Model:	T8530C-5855	T8530A-5840
Power:	28W	28W
Luminous:	1200-1500lm	1200-1500lm
Beam angle:	55°	40°
Dimensions:		

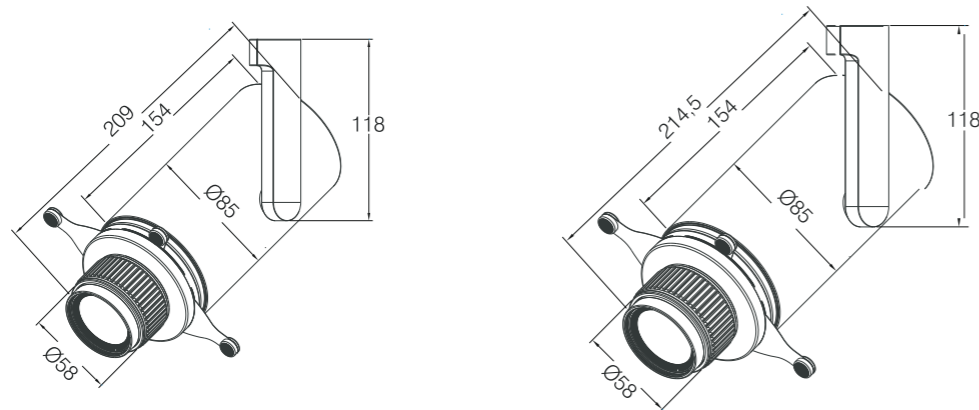

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

ART TRACK LIGHT

Body color


Matt Black

Matt White


Reflector color

Matt White

Matt Black

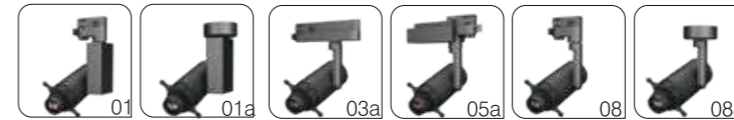


Model:	T9540C-5855	T9540C-5840
Power:	36W	36W
Luminous:	1600-1800lm	1600-1800lm
Beam angle:	55°	40°
Dimensions:		

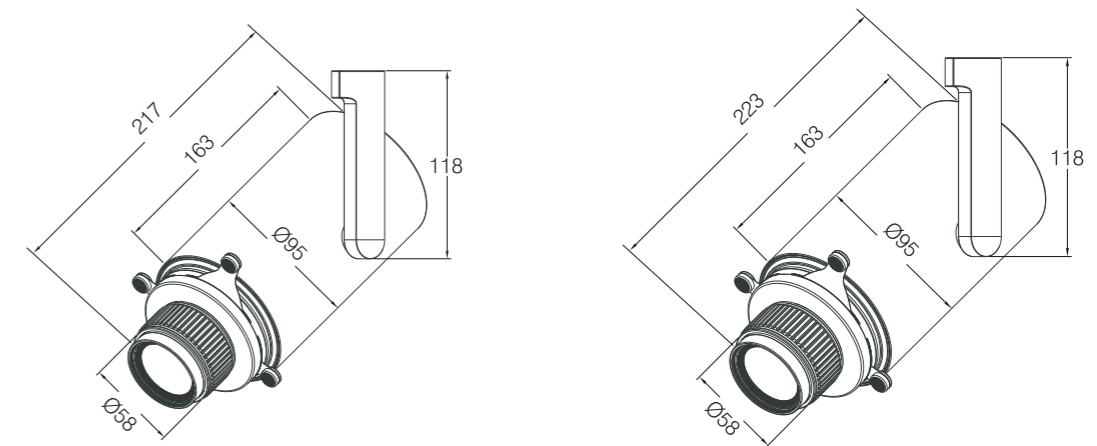

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track 4-Wire 3-Circuit Track/ 6-Wire 3-Circuit Dali Track

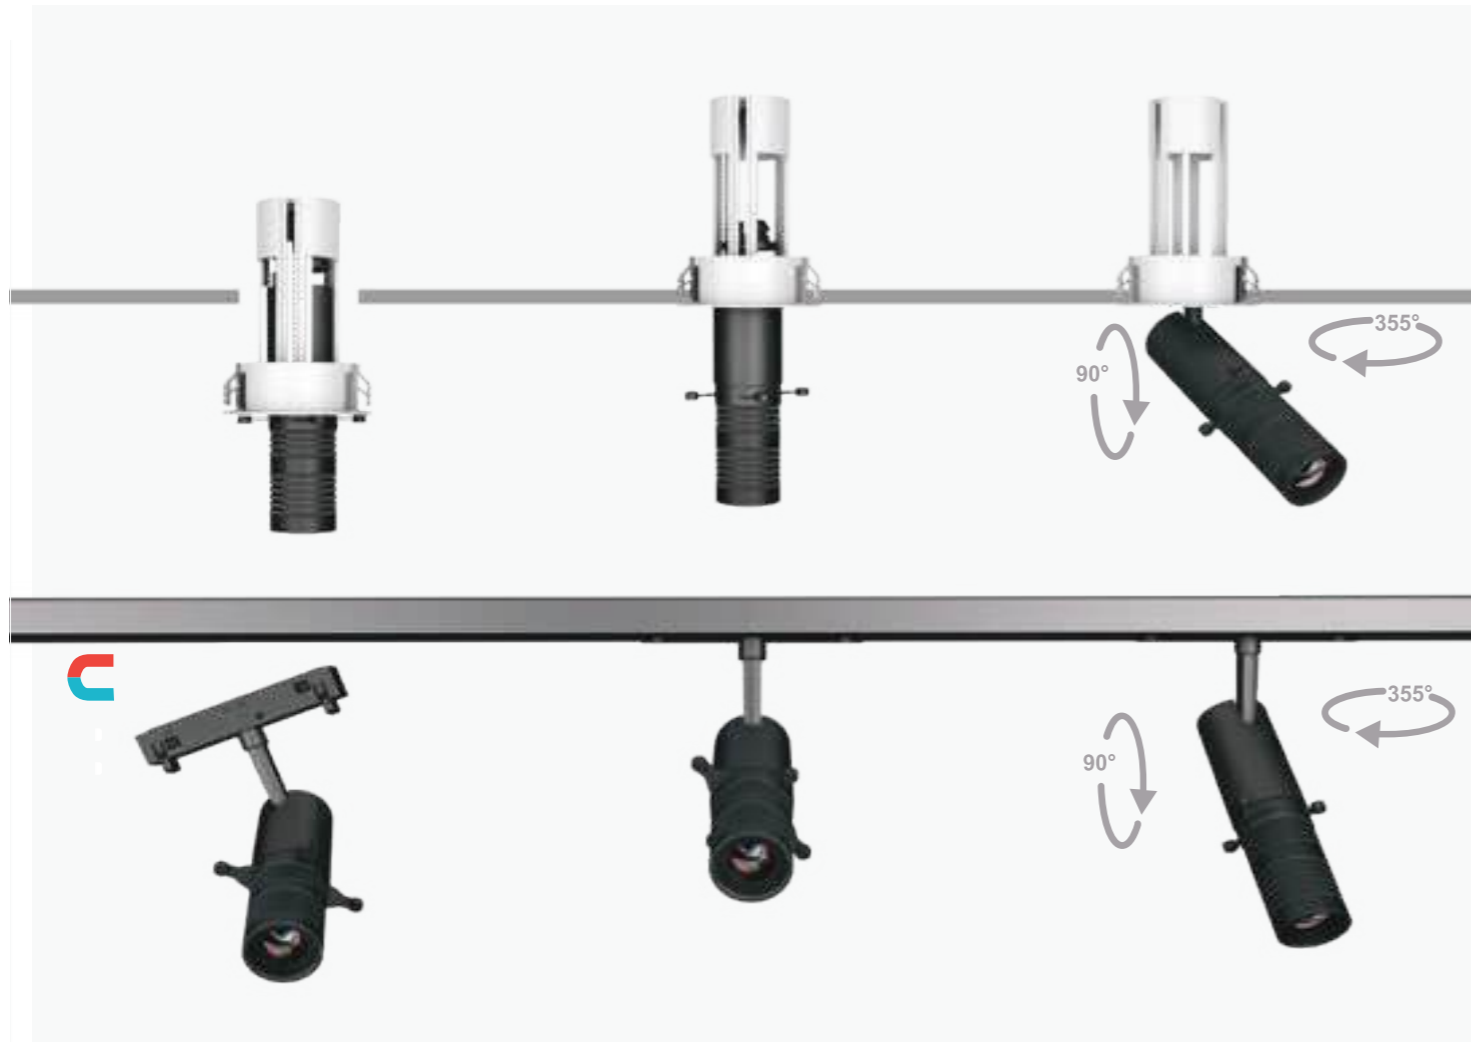

Body color

● Matt Black

○ Matt White



Reflector color

○ Matt White

● Matt Black



Model:	D7008B-3635	D7008B-3645
Power:	8W	8W
Luminous:	250-300lm	250-300lm
Beam angle:	Zoomable 25°-45°	Zoomable 20°-35°
Dimensions:		

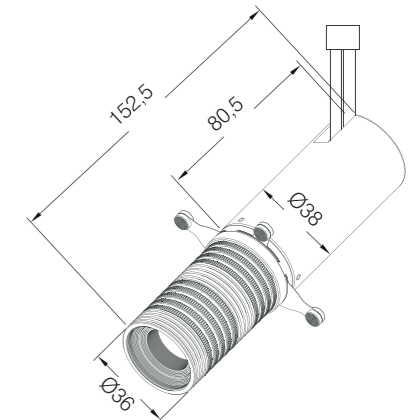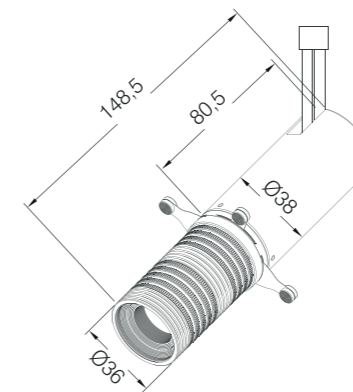

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

ART TRACK LIGHT

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black




Model: C1070K-3836B

Power: 10W

Luminous: 350lm

Beam angle: 15°-36°

Dimensions:

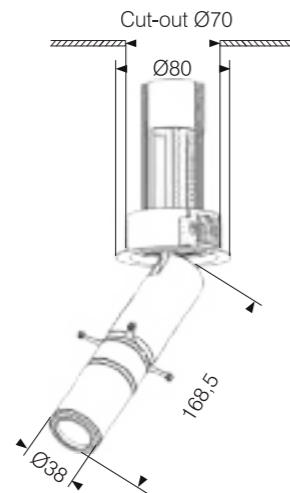

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

ART TRACK LIGHT

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black




Model: C1070K-3855

Power: 10W

Luminous: 350lm

Beam angle: 55°

Dimensions:

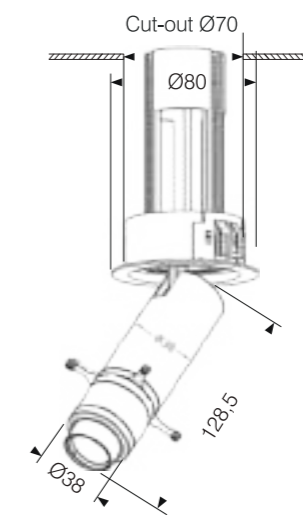

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi Zigbee, Bluetooth

ART TRACK LIGHT

Body color

● Matt Black

○ Matt White

Reflector color


○ Matt White

● Matt Black



Model:	D1075K-3836B	D2095K-4836B	D30125K-5836B
Power:	10W	20W	28W
Luminous:	350lm	900lm	1300lm
Beam angle:	15°-36°		

Dimensions:

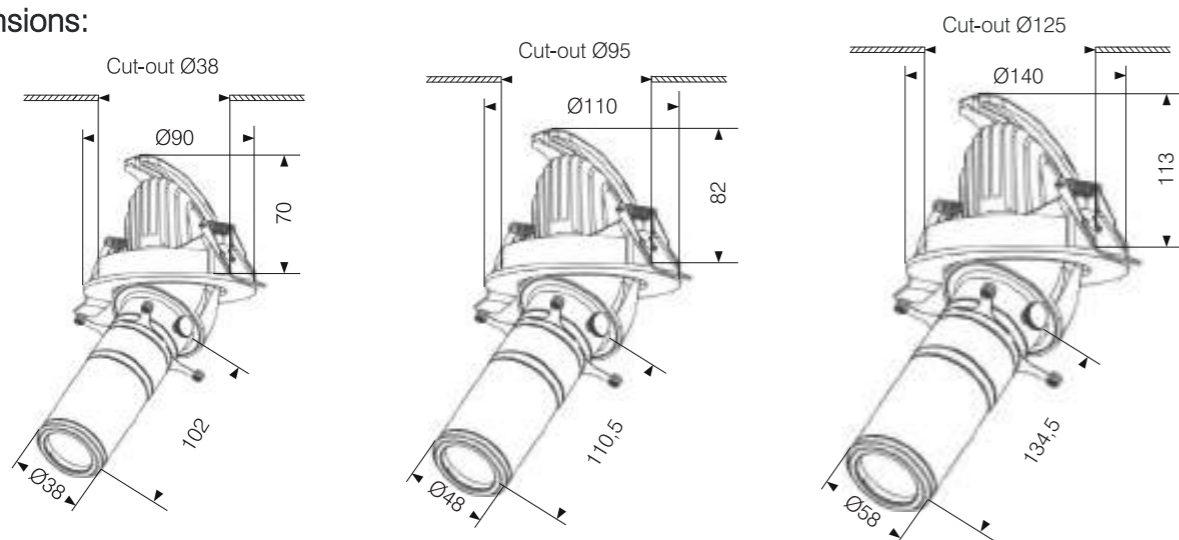

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

ART TRACK LIGHT

Body color

● Matt Black

○ Matt White

Reflector color


○ Matt White

● Matt Black



Model:	D1075K-3855	D2095K-4855	D30125K-5855
Power:	10W	20W	28W
Luminous:	350lm	850lm	1200lm
Beam angle:	55°		

Dimensions:

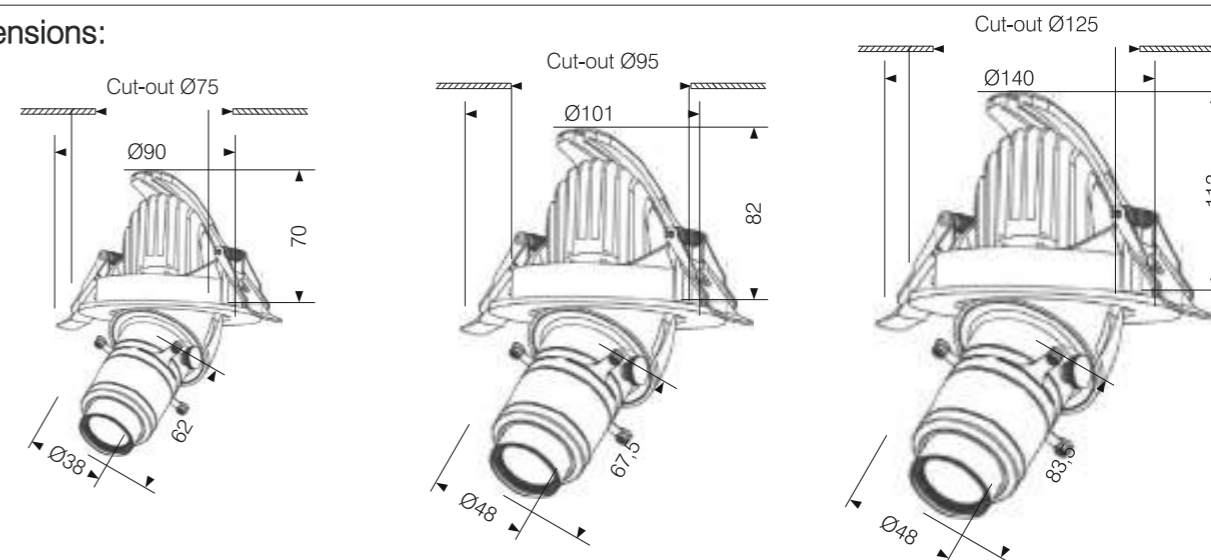

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Wi-fi, Zigbee, Bluetooth

ART TRACK LIGHT

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black




Model: T1003K-3836B

Power: 10W

Luminous: 350lm

Beam angle: 15°-36°

Dimensions:

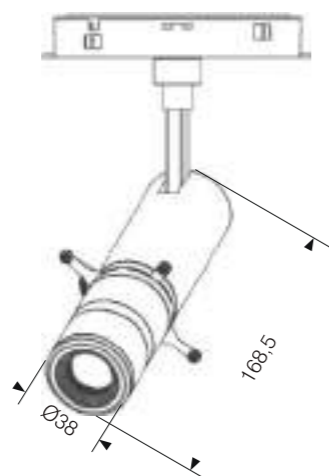

General specifications

LED: Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek

CRI(Ra): >92/ 95/ 97

SDCM: <3

CCT: 2700K/ 3000K/ 4000K/ 6500K

UGR: <10

IP rating: 20

Lifetime: >50.000h

Control: On/ Off, Dali, 0-10V, Triac dimming, Dmx512

ART TRACK LIGHT

Body color

Matt Black

Matt White

Reflector color

Matt White

Matt Black




Model: T1003K-3855

Power: 10W

Luminous: 350lm

Beam angle: 55°

Dimensions:

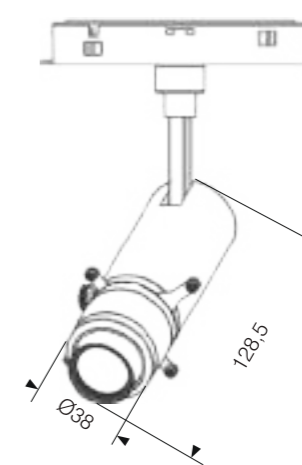

General specifications

LED: Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek

CRI(Ra): >92/ 95/ 97

SDCM: <3

CCT: 2700K/ 3000K/ 4000K/ 6500K


UGR: <10

IP rating: 20

Lifetime: >50.000h

Control: On/ Off, Dali, 0-10V, Triac dimming, Dmx512

Cabinet

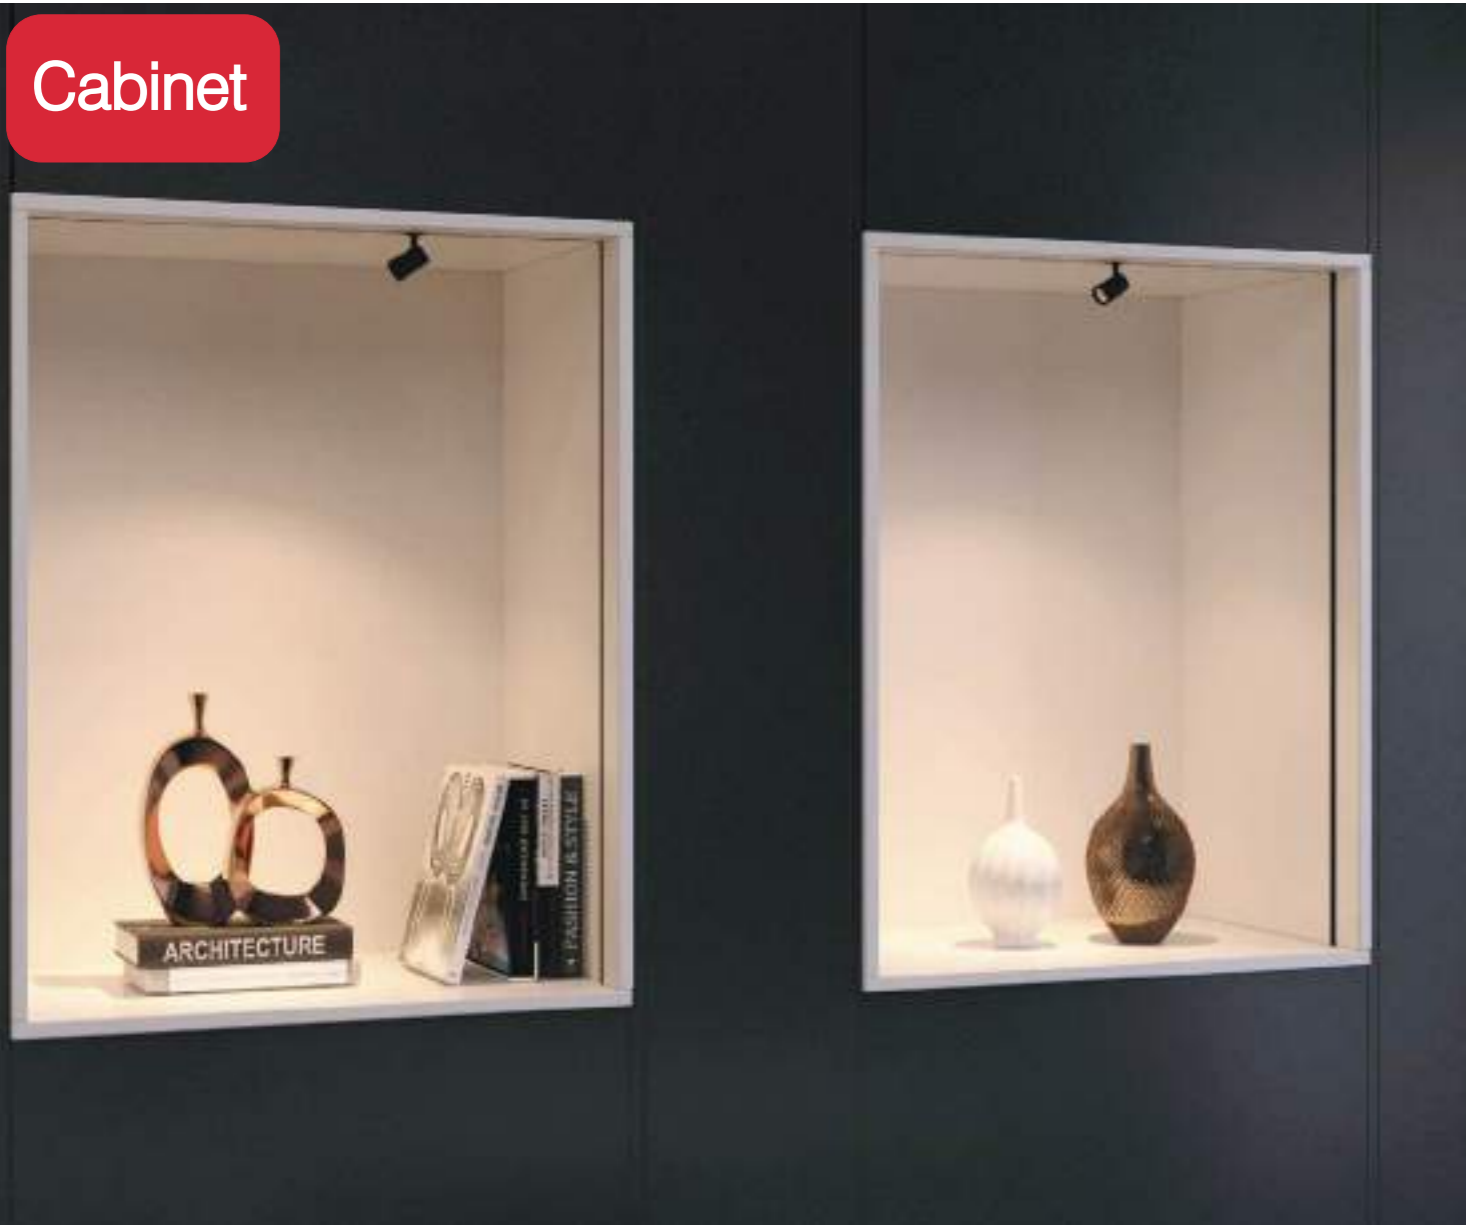

Body color

Matt White

Matt Black

Reflector color



Matt White

Matt Black/ Shiny Black



TRACK AND LIGHT

Model:	MN2503	Track	TMN101000	TMN101500	TMN102000
Power:	3W				
Luminous:	225lm				
Beam angle:	60°				
Dimensions:					

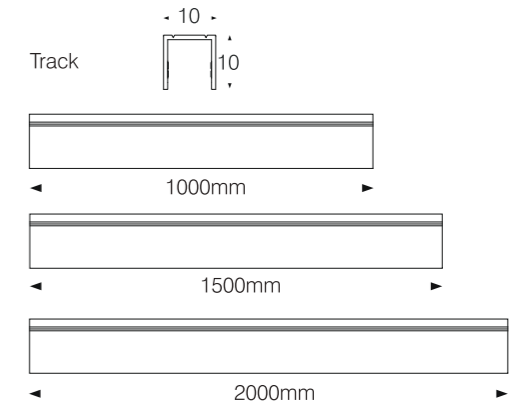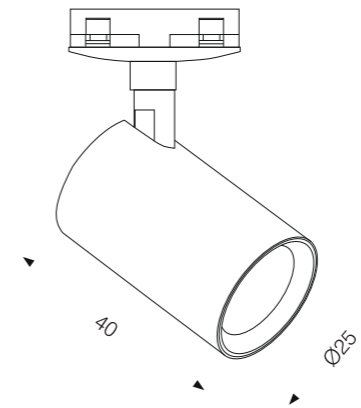

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



RECESSED CEILING

Body color

● Matt Black


Reflector color

● Black



ZOOMABLE RECESSED CEILING

Model:	DWY5503	DWY5505
Power:	3W	5W
Luminous:	240lm	400lm
Beam angle:	10°-40°	
Dimensions:		

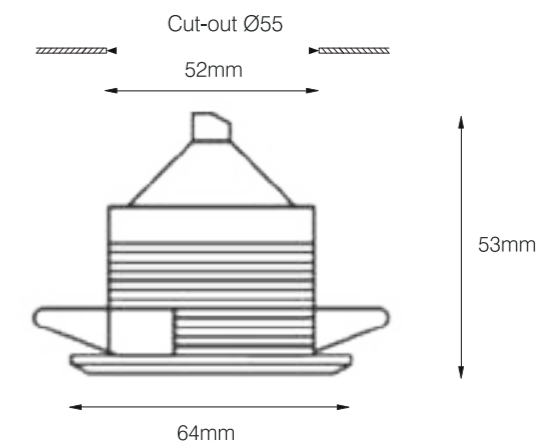

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

RECESSED CEILING

Body color

● Matt Black

○ Matt White


Reflector color

● Black



ZOOMABLE RECESSED CEILING

Model:	DGWY5001	DGWY5503
Power:	1W	3W
Luminous:	60lm	180lm
Beam angle:	10°-50°	
Dimensions:		

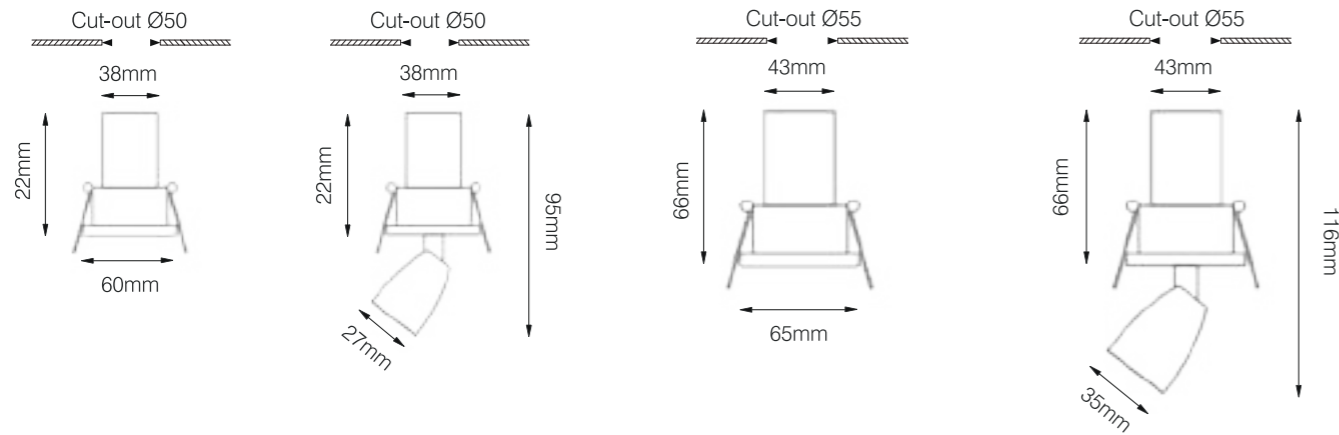

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

CABINET

Body color

● Matt Black


Reflector color

● Black



ZOOMABLE CABINET

Model:	DGCWY4501	DGCWY4503
Power:	1W	3W
Luminous:	80lm	240lm
Beam angle:	10°-40°	
Dimensions:		

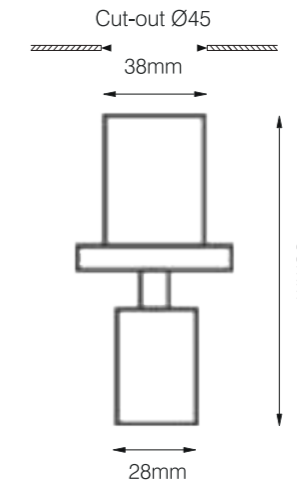

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

SURFACE


Body color

Matt Black

Matt White



Model:	SWY3402MK
Power:	2W
Luminous:	100lm
Beam angle:	15°/ 24°/ 38°
Dimensions:	

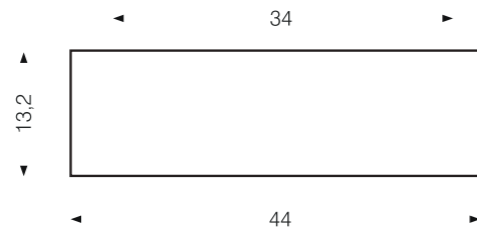

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	AC220V/ DC24V

CABINET

Body color


Matt Black

Matt White



RECESSED CEILING

Model:	DWY3402MK
Power:	2W
Luminous:	100lm
Beam angle:	15°/ 24°/ 38°
Dimensions:	

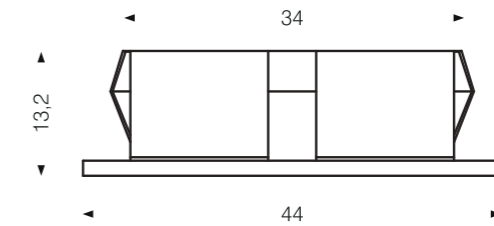

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	AC220V/ DC24V

Body color

 Matt Black

 Matt White


Reflector color

 Black


Honey Comb

ZOOMABLE TRACK LIGHT

Model:	GWYD4205
Power:	5W
Luminous:	300lm
Beam angle:	10°-42°
Dimensions:	

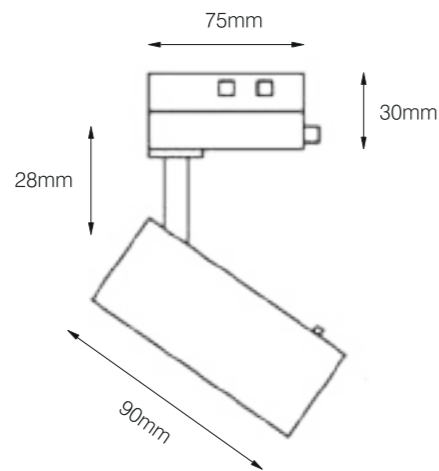

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC100-240V

Body color

 Matt Black

 Matt White


Reflector color

 Black


Honey Comb

ZOOMABLE TRACK LIGHT

Model:	GWYD5007	GWYD5010
Power:	7W	10W
Luminous:	420lm	600lm
Beam angle:	15°-45°	
Dimensions:		

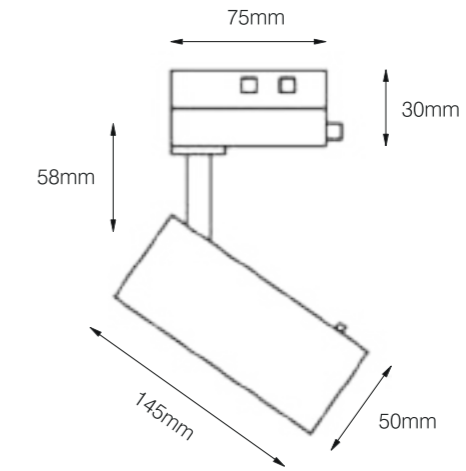

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V

TRACK LIGHT

Body color

● Matt Black

○ Matt White

Reflector color


● Black



Shading fan leaf

ZOOMABLE TRACK LIGHT

Model:	TWYD702	TWYD703	Track:	T2727-1000	T2727-2000
Power:	1,5W	3W			
Luminous:	90lm	240lm			
Beam angle:	10°-40°				
Dimensions:					

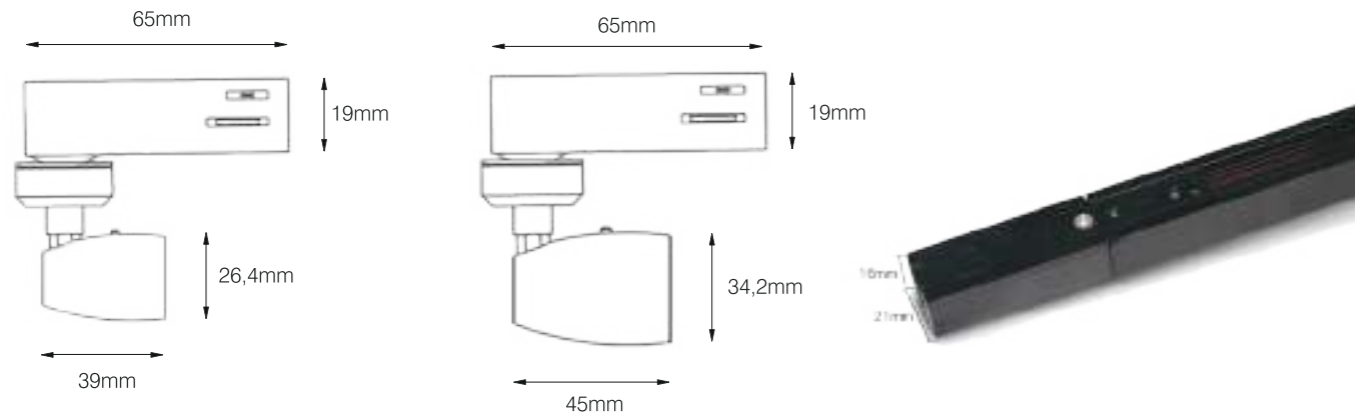

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, 0-10V, customized
Voltage:	DC24V

SURFACE

Body color

● Matt Black

Reflector color


● Black



Honey Comb

ZOOMABLE SURFACE

Model:	SWY0501	SWY0503
Power:	1W	3W
Luminous:	80lm	240lm
Beam angle:	10°-40°	
Dimensions:		

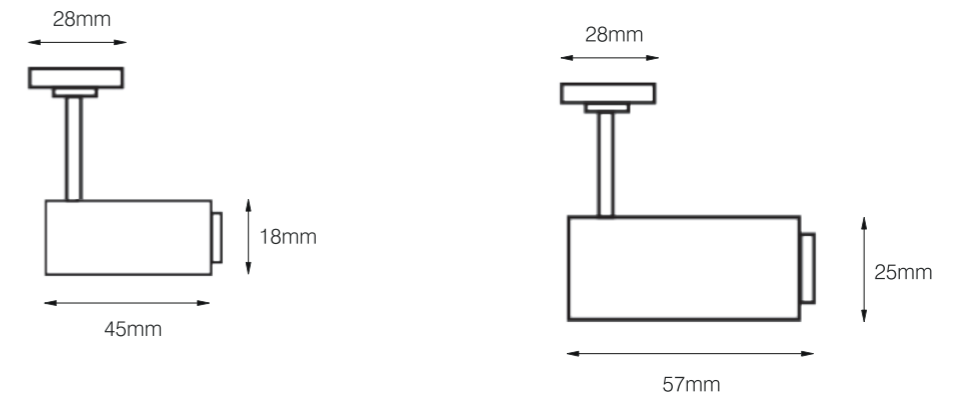

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
SDCM:	<3
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V


SURFACE

- Body color
 Matt Black
 Reflector color
 Black



ZOOMABLE SURFACE

Model:	SWYD705
Power:	3W
Luminous:	225lm
Beam angle:	10°-40°
Dimensions:	

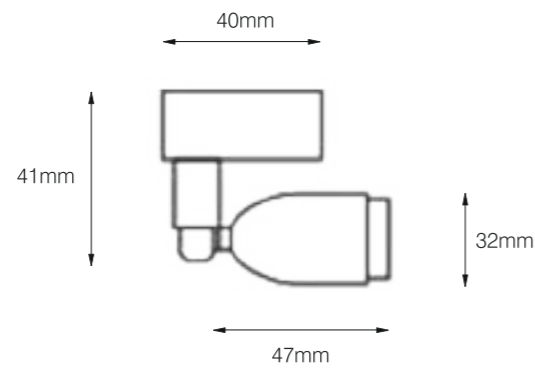

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	AC100-240V


CABINET

- Body color
 Matt Black
 Reflector color
 Black



ZOOMABLE CABINET

Model:	GPWY018	GPWY038
Power:	1W	3W
Luminous:	80lm	240lm
Beam angle:	8°-40°	
Dimensions:		

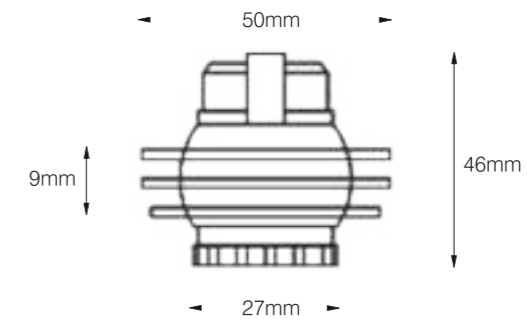

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V


PORTABLE CHARGE

- Body color
 Matt Black
- Reflector color
 Black



ZOOM PORTABLE CHARGE

Model:	PCWY092
Power:	3W
Luminous:	240lm
Beam angle:	10°-40°
Dimensions:	

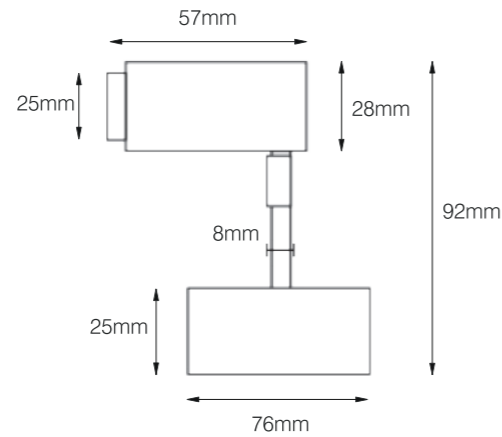

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95// 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	C charging port


PORTABLE CHARGE

- Body color
 Matt Black
- Reflector color
 Black



ZOOM PORTABLE CHARGE

Model:	PCWY275	PCWY350
Power:	3W	3W
Luminous:	240lm	240lm
Beam angle:	10°-40°	10°-40°
Dimensions:		

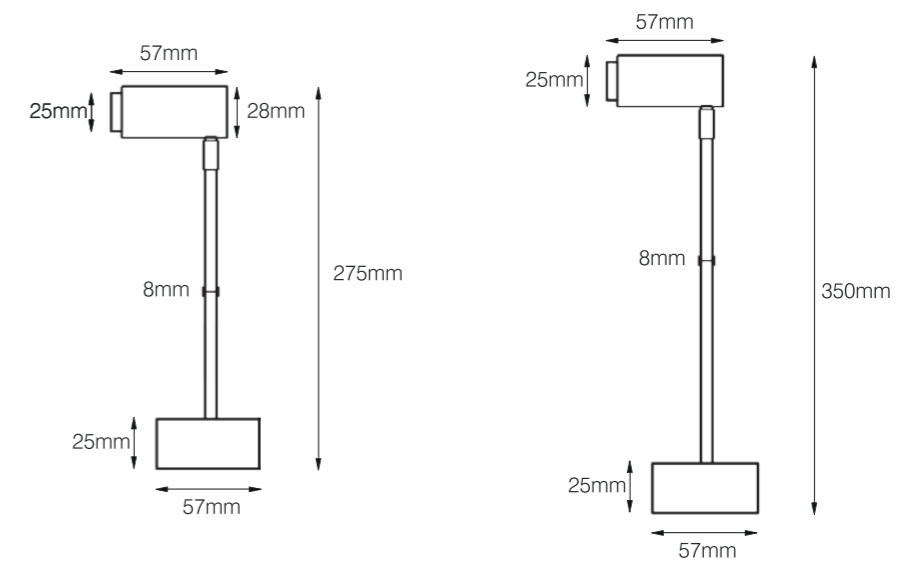

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	C charging port


FLOOR MOUNTED

- Body color
- Matt Black
- Reflector color
- Black



ZOOMABLE FLOOR MOUNTED

Model:	GCWY045	GCWY057
Power:	1W	3W
Luminous:	80lm	240lm
Beam angle:	10°-40°	

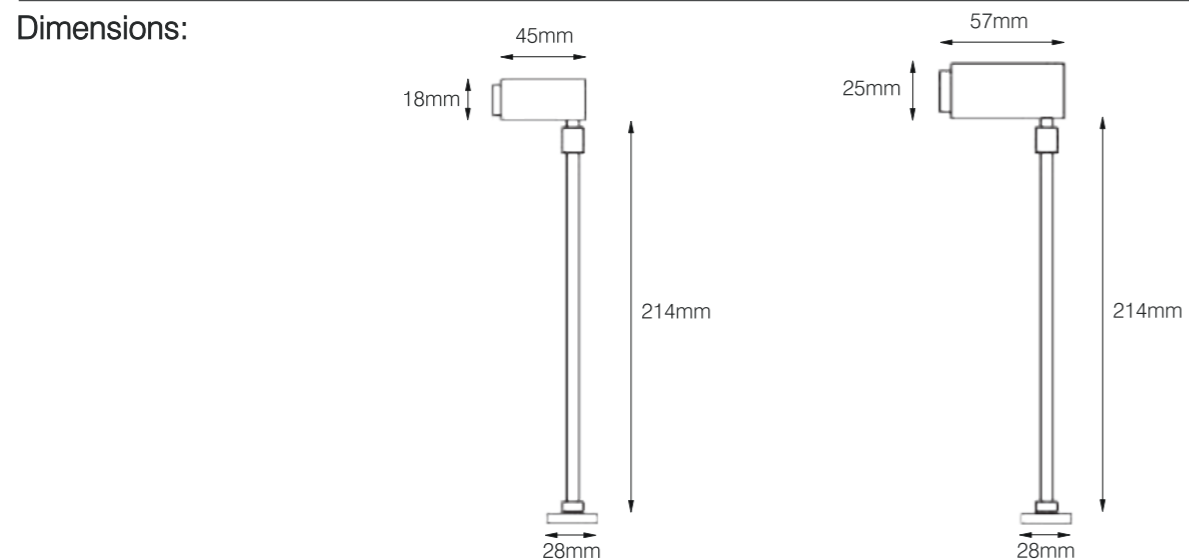

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V


FLOOR MOUNTED

- Body color
- Matt Black
 - Matt White
- Reflector color
- Black



ZOOMABLE FLOOR MOUNTED

Model:	GSWY045	GSWY057
Power:	1W	3W
Luminous:	75lm	225lm
Beam angle:	10°-40°	

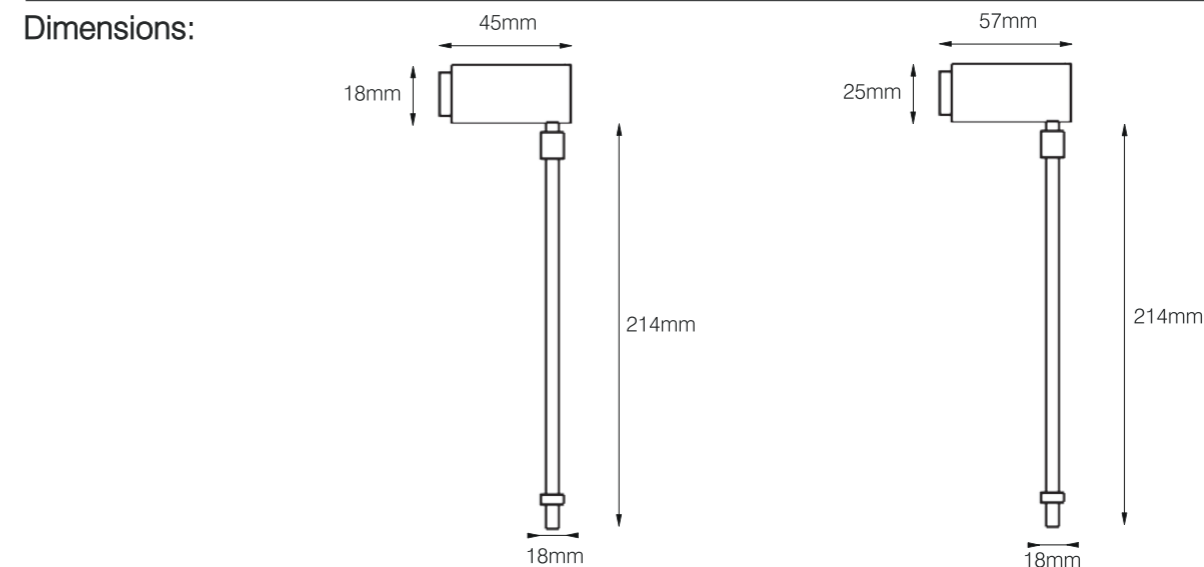

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/ 6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V


FLOOR MOUNTED

Body color
 Matt Black
 Reflector color
 Black



ZOOMABLE FLOOR MOUNTED

Model:	FNWY330
Power:	10W
Luminious:	750lm
Beam angle:	10°-60°
Dimensions:	

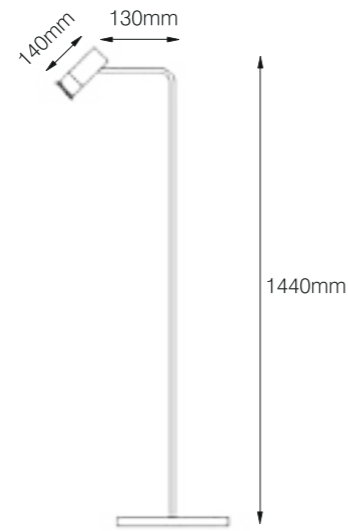

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	3000K/ 4000K/6000K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	AC100-240V



FLOOR MOUNTED

Body color
 Matt Black
 Reflector color
 Black



ZOOMABLE FLOOR MOUNTED

Model:	FMWY0049
Power:	10W
Luminious:	660lm
Beam angle:	10°-60°
Dimensions:	

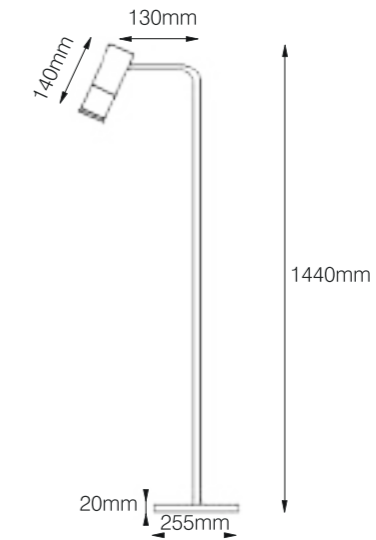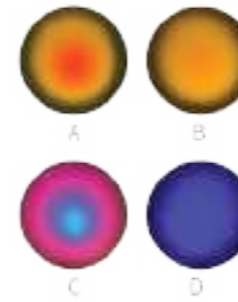

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95/ 97
Material:	Aluminum alloy lamp body
CCT:	A style/ B style/ C style/ D style
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Local dimming
Voltage:	AC100-240V





Body color

● Black

● Golden



Model:	LWY520	LWY850
Power:	6W	12W
Luminous:	30lm	60lm
Beam angle:	60°	
Dimensions:		

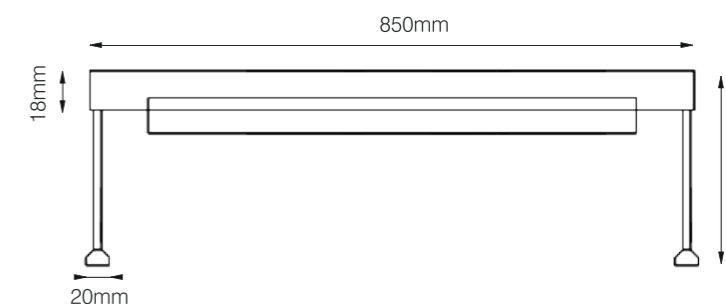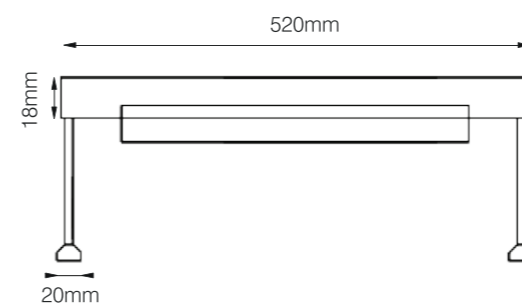

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
Material:	Aluminum alloy lamp body
CRI(Ra):	>92/ 95/ 97
CCT:	3000K/ 4000K/ 6000K
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming
Voltage:	DC24V



MAGNETIC SLIM
TRACK SYSTEM 4.0



Ø45



Tunable White

Surface Mount track



Accessories

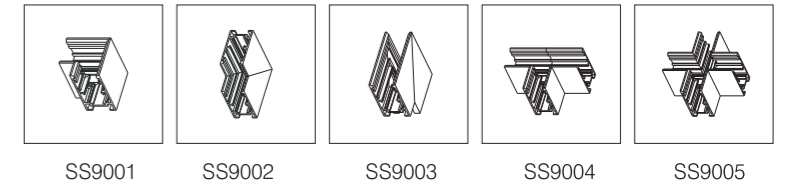

Model: SS1000/ SS1500/ SS2000/ SS3000
 Dimensions: 1m/ 1,5m/ 2m / 3m
 Colour: Black, White
 Output current: DC48V

Recessed track with trim



Accessories

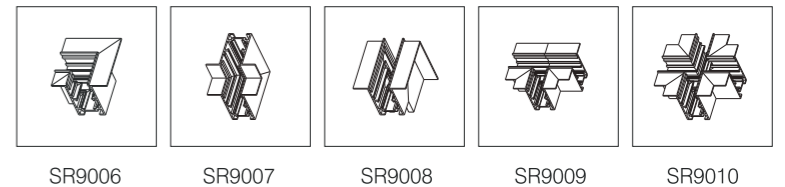

Model: SR1000/ SR1500/ SR2000/ SS3000
 Dimensions: 1m/ 1,5m/ 2m/ 3m
 Colour: Black, White
 Output current: DC48V

Suspended Track

Accessories

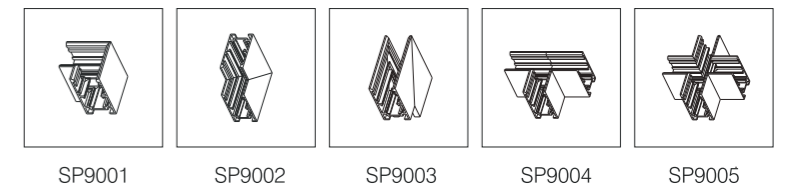

Model: SP1000/ SP1500/ SP2000/ SP3000
 Dimensions: 1m/ 1,5m/ 2m/ 3m
 Colour: Black, White
 Output current: DC48V





MAGNETIC SLIM

Body color

- Matt Black
- Matt White


Reflector color

- Matt White
- Matt Black/ Shiny Black



Model:	AMS4807	AMS4810	AMS5820	AMS6825	AMS3080
Power:	7W	10W	20W	25W	30W
Luminous:	420lm	600lm	1200lm	1500lm	1800lm
Beam angle:	24°/ 36°				

Dimensions:

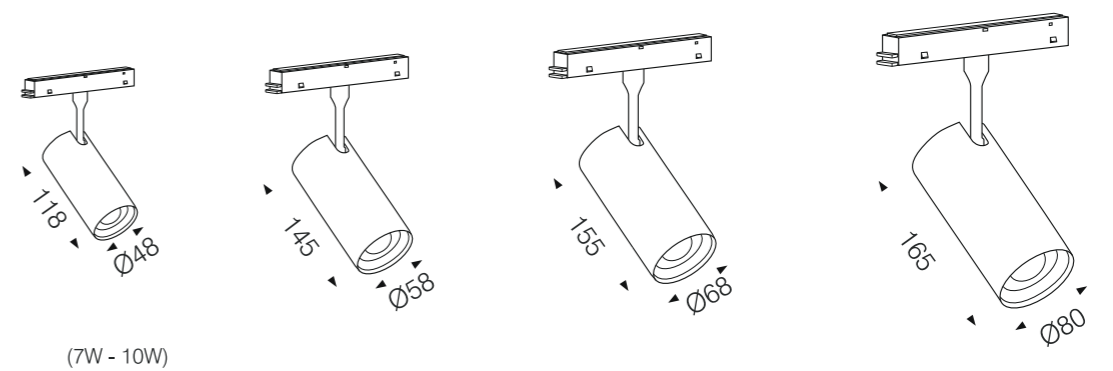

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V




**MAGNETIC
SLIM**

- Body color
- Matt Black
 - Matt White
- Reflector color
- Black



Model:	AMGS11206	AMGS22012
Power:	6W	12W
Luminous:	360lm	720lm
Beam angle:	24°	120°
Dimensions:		

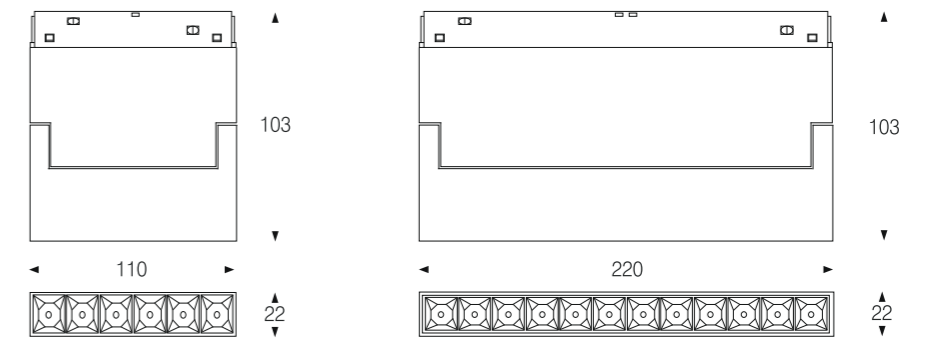

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



MAGNETIC SLIM

Body color

● Matt Black





○ Matt White

Reflector color

● Black



Model:	AMLS12006	AMLS24012	AMLS36018	AMLS48024
Power:	6W	12W	18W	24W
Luminous:	360lm	720lm	1350lm	1440lm
Beam angle:	24°/ 36°			
Dimensions:				

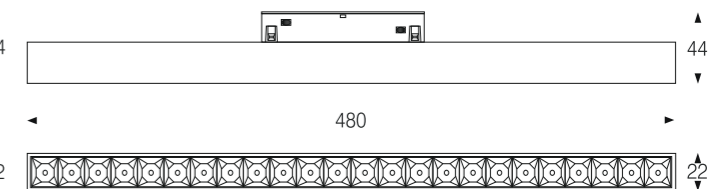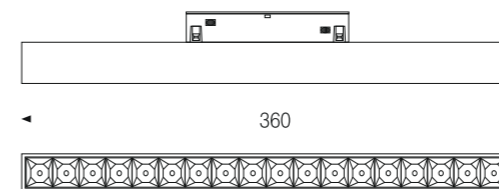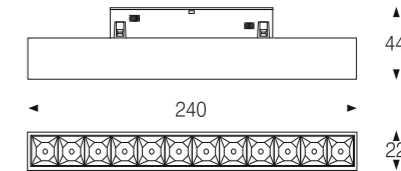

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



MAGNETIC SLIM

Body color





● Matt Black

○ Matt White



Model:	AMLL12006	AMLL30010	AMLL60020	AMLL90030
Power:	6W	10W	20W	30W
Luminous:	360lm	600lm	1200lm	1800lm
Beam angle:	120°			

Dimensions:

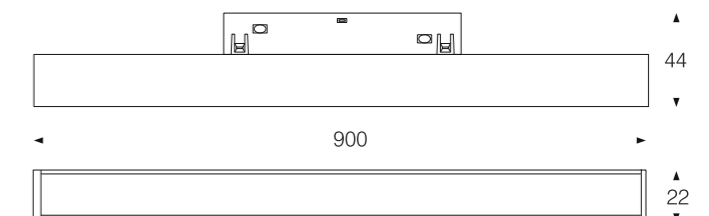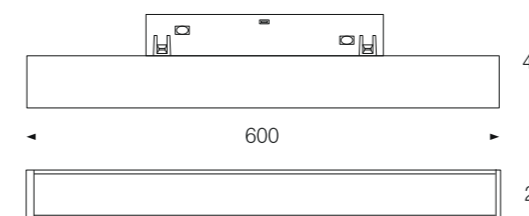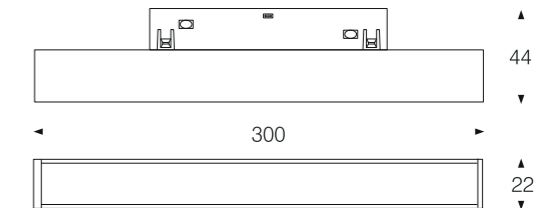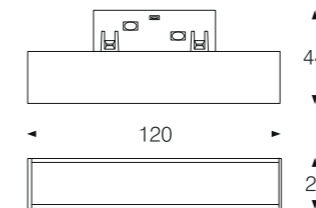

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



**MAGNETIC
SLIM**



Body color

● Brass

Reflector color

● Shiny Black


Model: AMS3507G

Power: 7W

Luminous: 420lm

Beam angle: 20°

Dimensions:

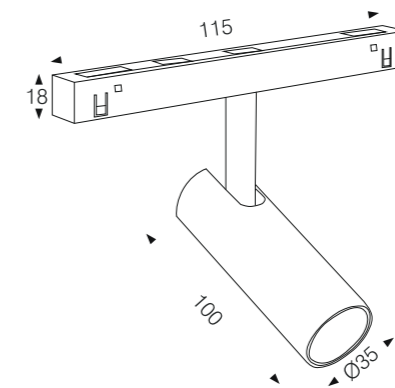

General specifications

LED: Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek

CRI(Ra): >92/ 95

SDCM: <3

CCT: 2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White

UGR: <16

IP rating: 20

Lifetime: >50.000h

Control: On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth

Voltage: DC48V



MAGNETIC SLIM



Body color

Matt White

Matt Black


Reflector color

Matt White

Matt Black

ZOOMABLE MAGNETIC SLIM

Model:	AMS4507Z
Power:	7W
Luminous:	420lm
Beam angle:	Zoomable 6°-60°
Dimensions:	

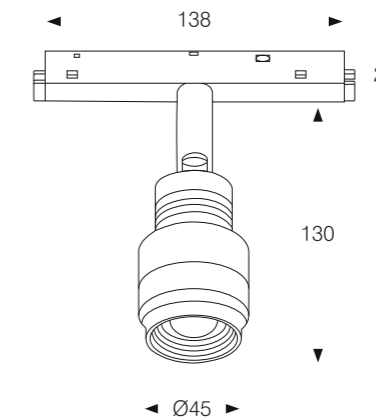

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



MAGNETIC SLIM

Body color

- Matt White
- Matt Black


Reflector color

- Matt White
- Matt Black



ZOOMABLE MAGNETIC SLIM

Model:	AMS3505Z	AMS4510Z	AMS5515Z	AMS6520Z	AMS7525Z
Power:	5W	10W	15W	20W	25W
Luminous:	300lm	600lm	1200lm	1200lm	1500lm
Beam angle:	Zoomable 10°-55°				
Dimensions:					

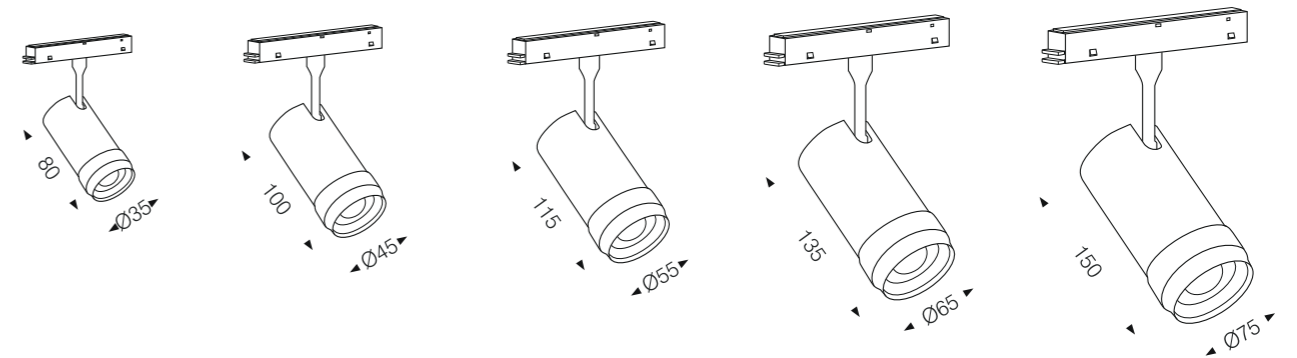

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V



**MAGNETIC
SLIM**



Body color

● Matt Black

○ Matt White

Reflector color

○ Matt White

● Matt Black


Model: AMW10220

Power: 20W

Luminous: 730lm

Beam angle: 24°/ 36°

Dimensions:

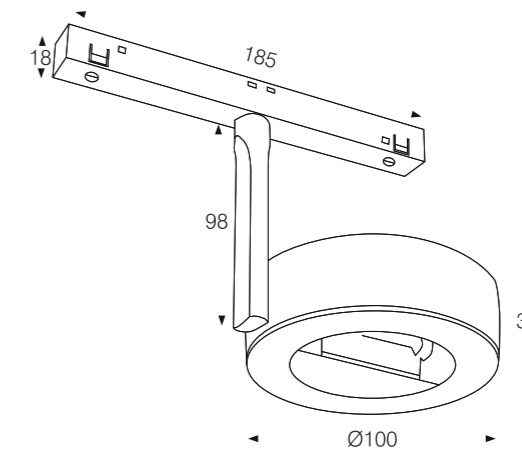

General specifications

LED: Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek

CRI(Ra): >92/ 95

SDCM: <3

CCT: 2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White


UGR: <16

IP rating: 20


Lifetime: >50.000h

Control: On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth


Voltage: DC48V

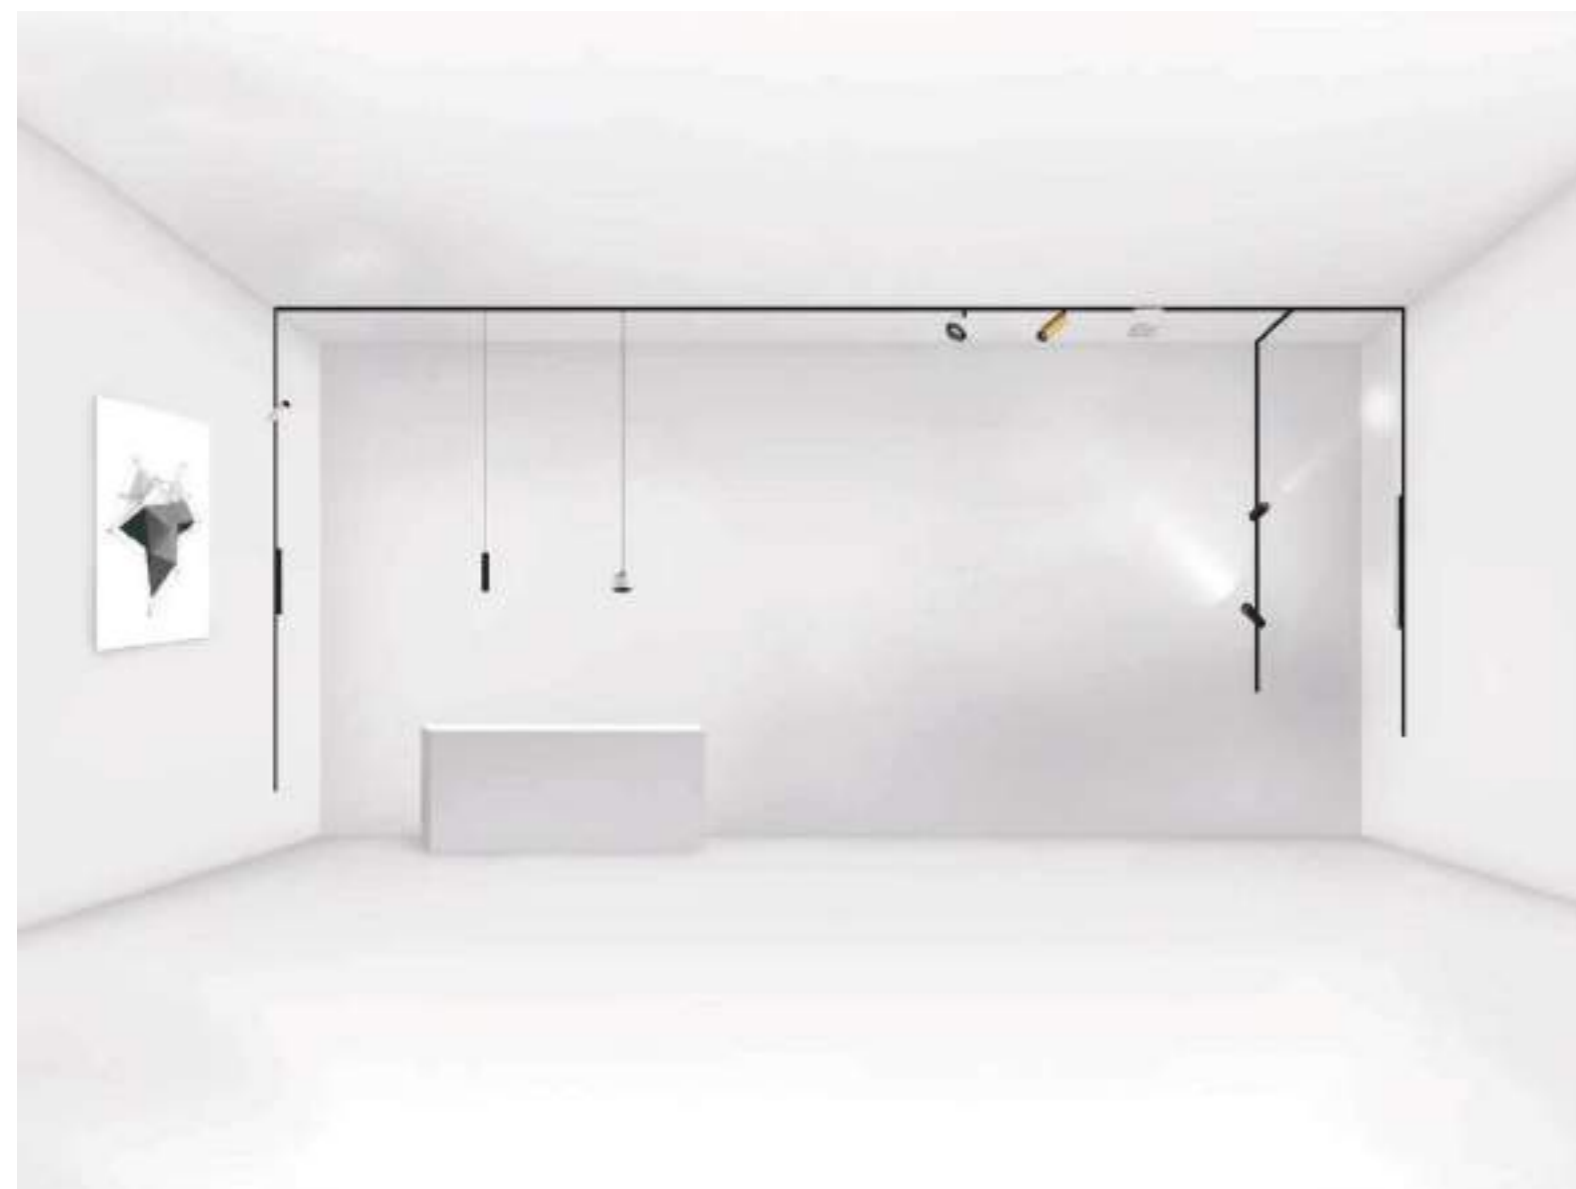

Recessed track with trim

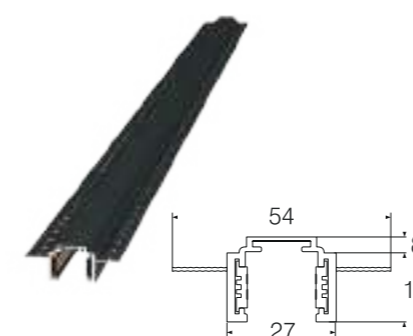


Accessories

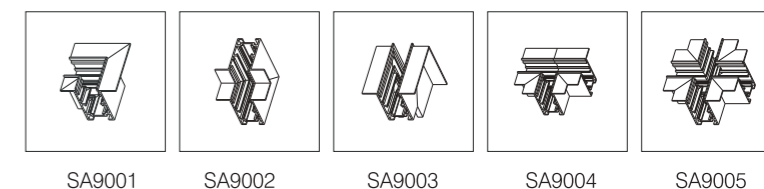


Model: SA1000/ SA1500/ SA2000/ SA3000
 Dimensions: 1m/ 1,5m/ 2m/ 3m
 Colour: Black, White
 Output current: DC48V

Surface Mount track

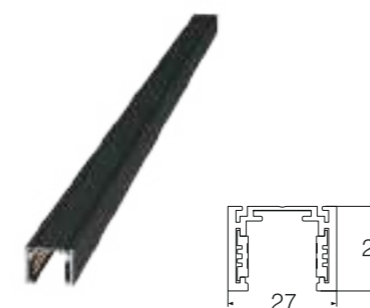

Accessories

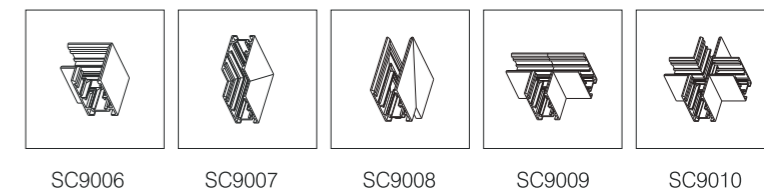

Model: SC1000/ SC1500/ SC2000/ SC3000
 Dimensions: 1m/ 1,5m/ 2m/ 3m
 Colour: Black, White
 Output current: DC48V

Body color

Matt Black

Matt White



Reflector color

Black



Model:	UMNL40210	UMNL72020	UMNL104030
Power:	10W	20W	30W
Luminous:	600lm	1200lm	1800lm
Beam angle:	24°/ 36°		

Dimensions:

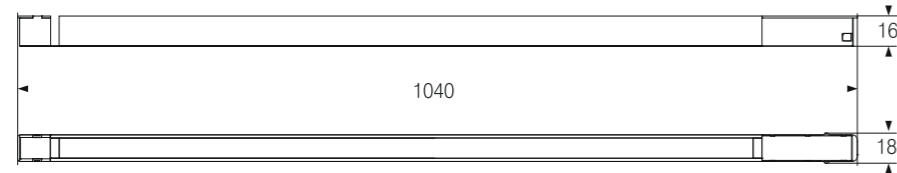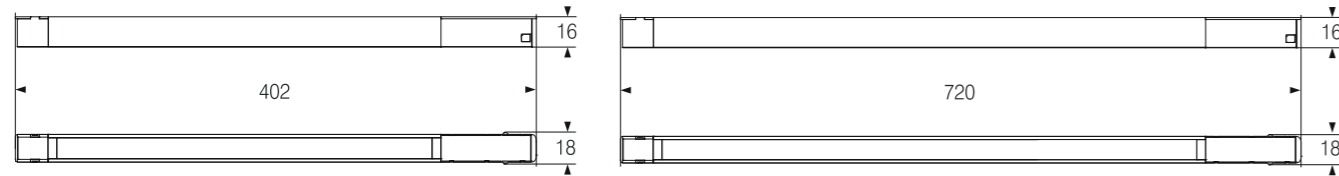

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

Body color

Matt Black

Matt White



Reflector color

Black



Model:	UMLS34712	UMLS48018	UMLS61024
Power:	12W	18W	24W
Luminous:	720lm	1080lm	1440lm
Beam angle:	24°/ 36°		

Dimensions:

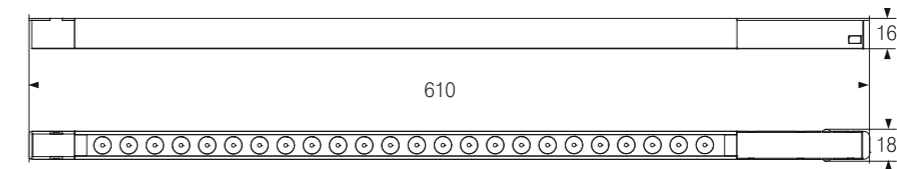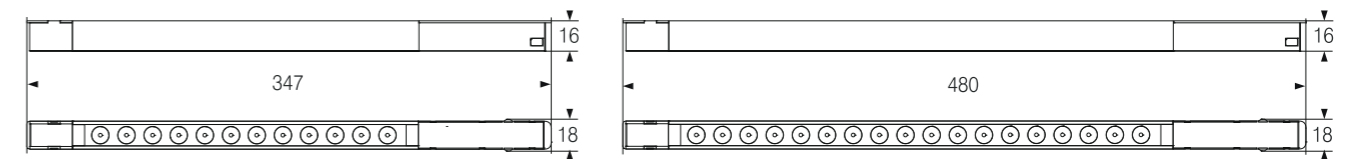

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>92/ 95
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K/ Tunable White
UGR:	<13
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Voltage:	DC48V

A-PRO

Track Light



A range of track light led in black or white finish and single or multiple square cellular options. Round aperture optics for excellent glare control with a <3 step MacAdam ellipse tolerance – as ADES A-Pro track light range

A-PRO

Body color

● Matt Black

○ Matt White

Reflector color


○ Matt White

● Matt Black



TRACK LIGHT

Model:	AP20430-6T	AP14936-9T	AP11016-4T	AP40560-12T
Power:	30W	9x4W	4x4W	2x30W
Luminous:	2550lm	3060lm	1360lm	5100lm
Beam angle:	12°/ 24°/ 38°/ 50°			
Dimensions:				

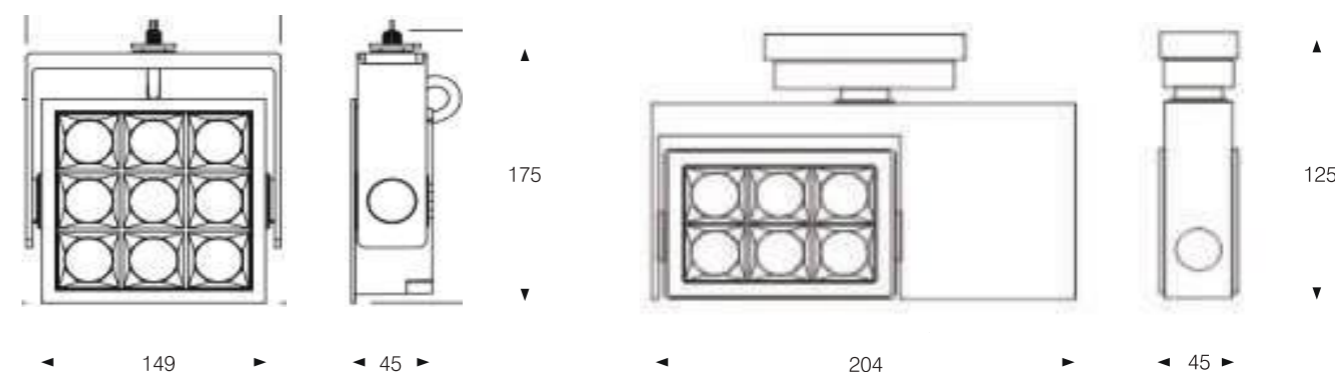

General specifications

LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>80/ 90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<10
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



ERIS
TRACK LIGHT



Body color

 Matt White



 Matt Black

Reflector color

 Matt White

 Matt Black
**TRACK LIGHT**

Model:	E4510T	E6620T
Power:	10W	20W
Luminous:	750lm	1500lm
Beam angle:	24°	
Dimensions:		

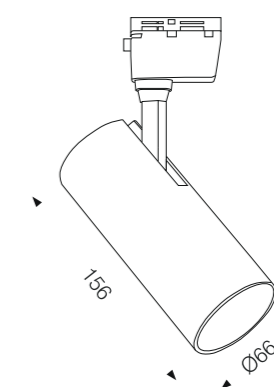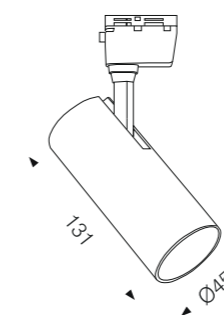**General specifications**


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<16
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth
Option:	2-Wire 1-Circuit Track/ 3-Wire 1-Circuit Track



Body color

● Aluminum



Model:	AD-T5-3003	AD-T5-6006	AD-T5-9010	AD-T5-12012
Power:	3W	6W	10W	12W
Luminous:	300lm	600lm	1000lm	1200lm
Beam angle:	120°			
Dimensions:				

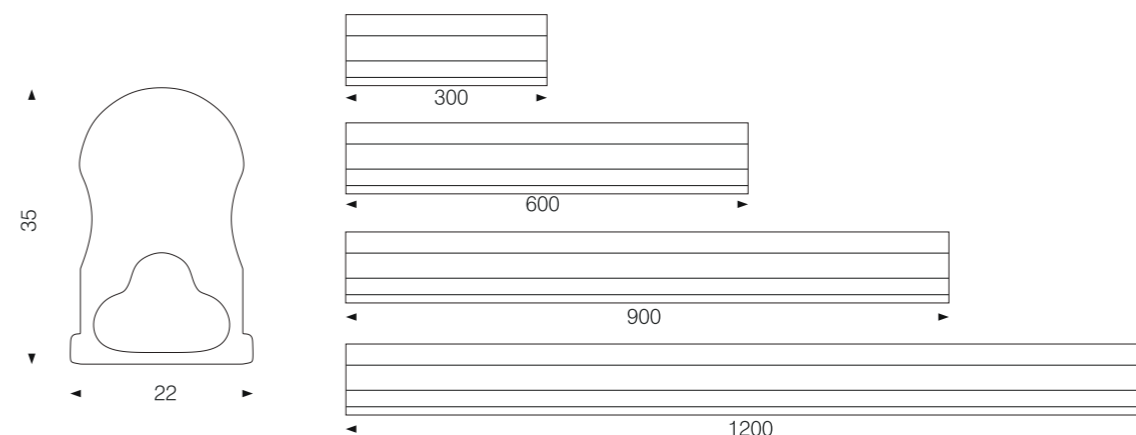

General specifications


LED:	Bridgelux/ Cree/ Osram/ Luminus/ Citizen / Honortek
CRI(Ra):	>90
SDCM:	<3
CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
UGR:	<19
IP rating:	20
Lifetime:	>50.000h
Control::	On/ Off

FLEXIBLE WALL WASHER

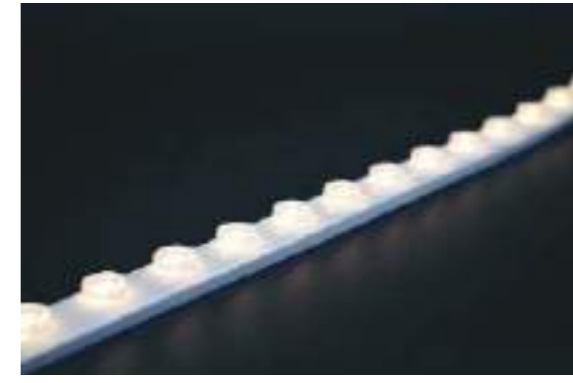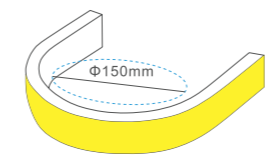

Model:	WWL1809-06	WWL1809-08	WL1809-18
Power:	6W	8W	18W
Luminous:	264lm	540lm	1900lm
Beam angle:	15°/ 30°/ 45°/ 15x60°		
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512		
Color:	RGB	RGBW	MONO
Voltage:	DC12V-24V		

Dimensions:

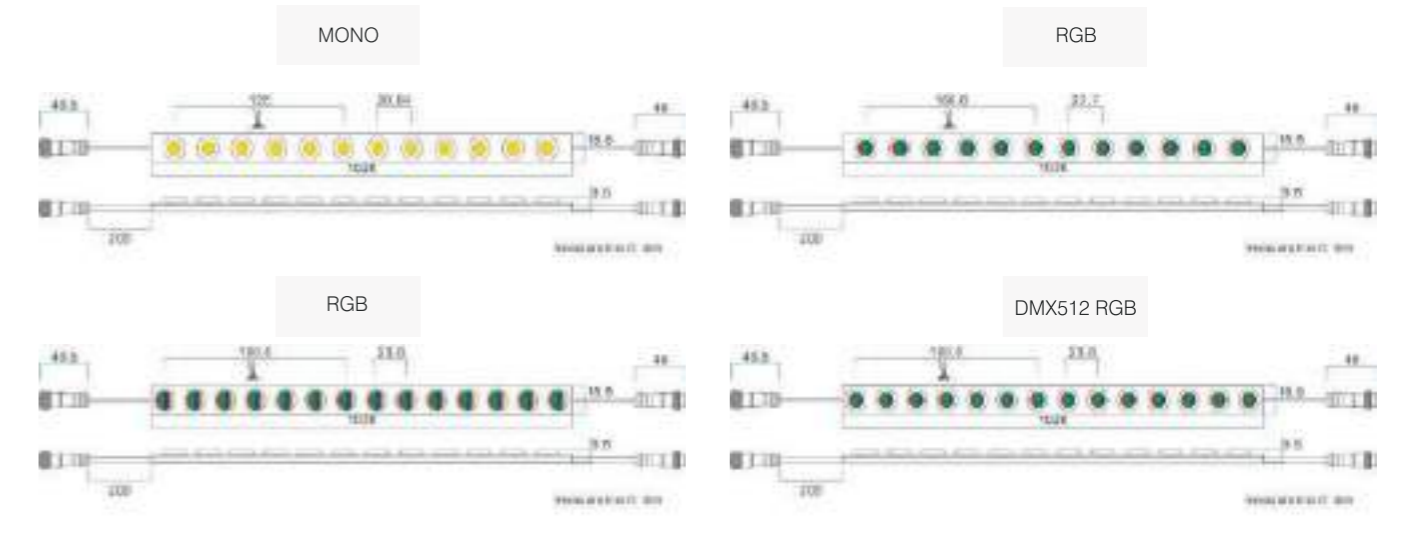

Accessories




Flexible wall washer light is accent lighting product that could wash the wall with special color light or create shadows, grazer lighting effect. It integrates the flexible housing with lens that could achieve 15-60 degree narrow beam and also waterproof for outdoor applications. It is flexible that could bend vertically or horizontally, maximum running length could up 20meters.



Model:	WWS2924-12	WWS2924-24
Power:	12W	24W
Luminous:	1200lm	1200lm
Beam angle:	15°/ 30°/ 50°/ 20x35°/ 18x20°/ 20x55°	
Color:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW	
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512	
Voltage:	DC12V-24V	

Dimensions:

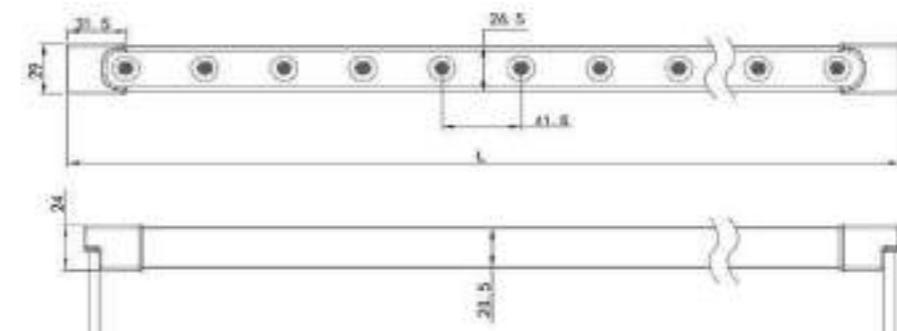

Bending diameter



Accessories option




Aluminum Clip




Adjustable Angle Clip



Aluminum Profile

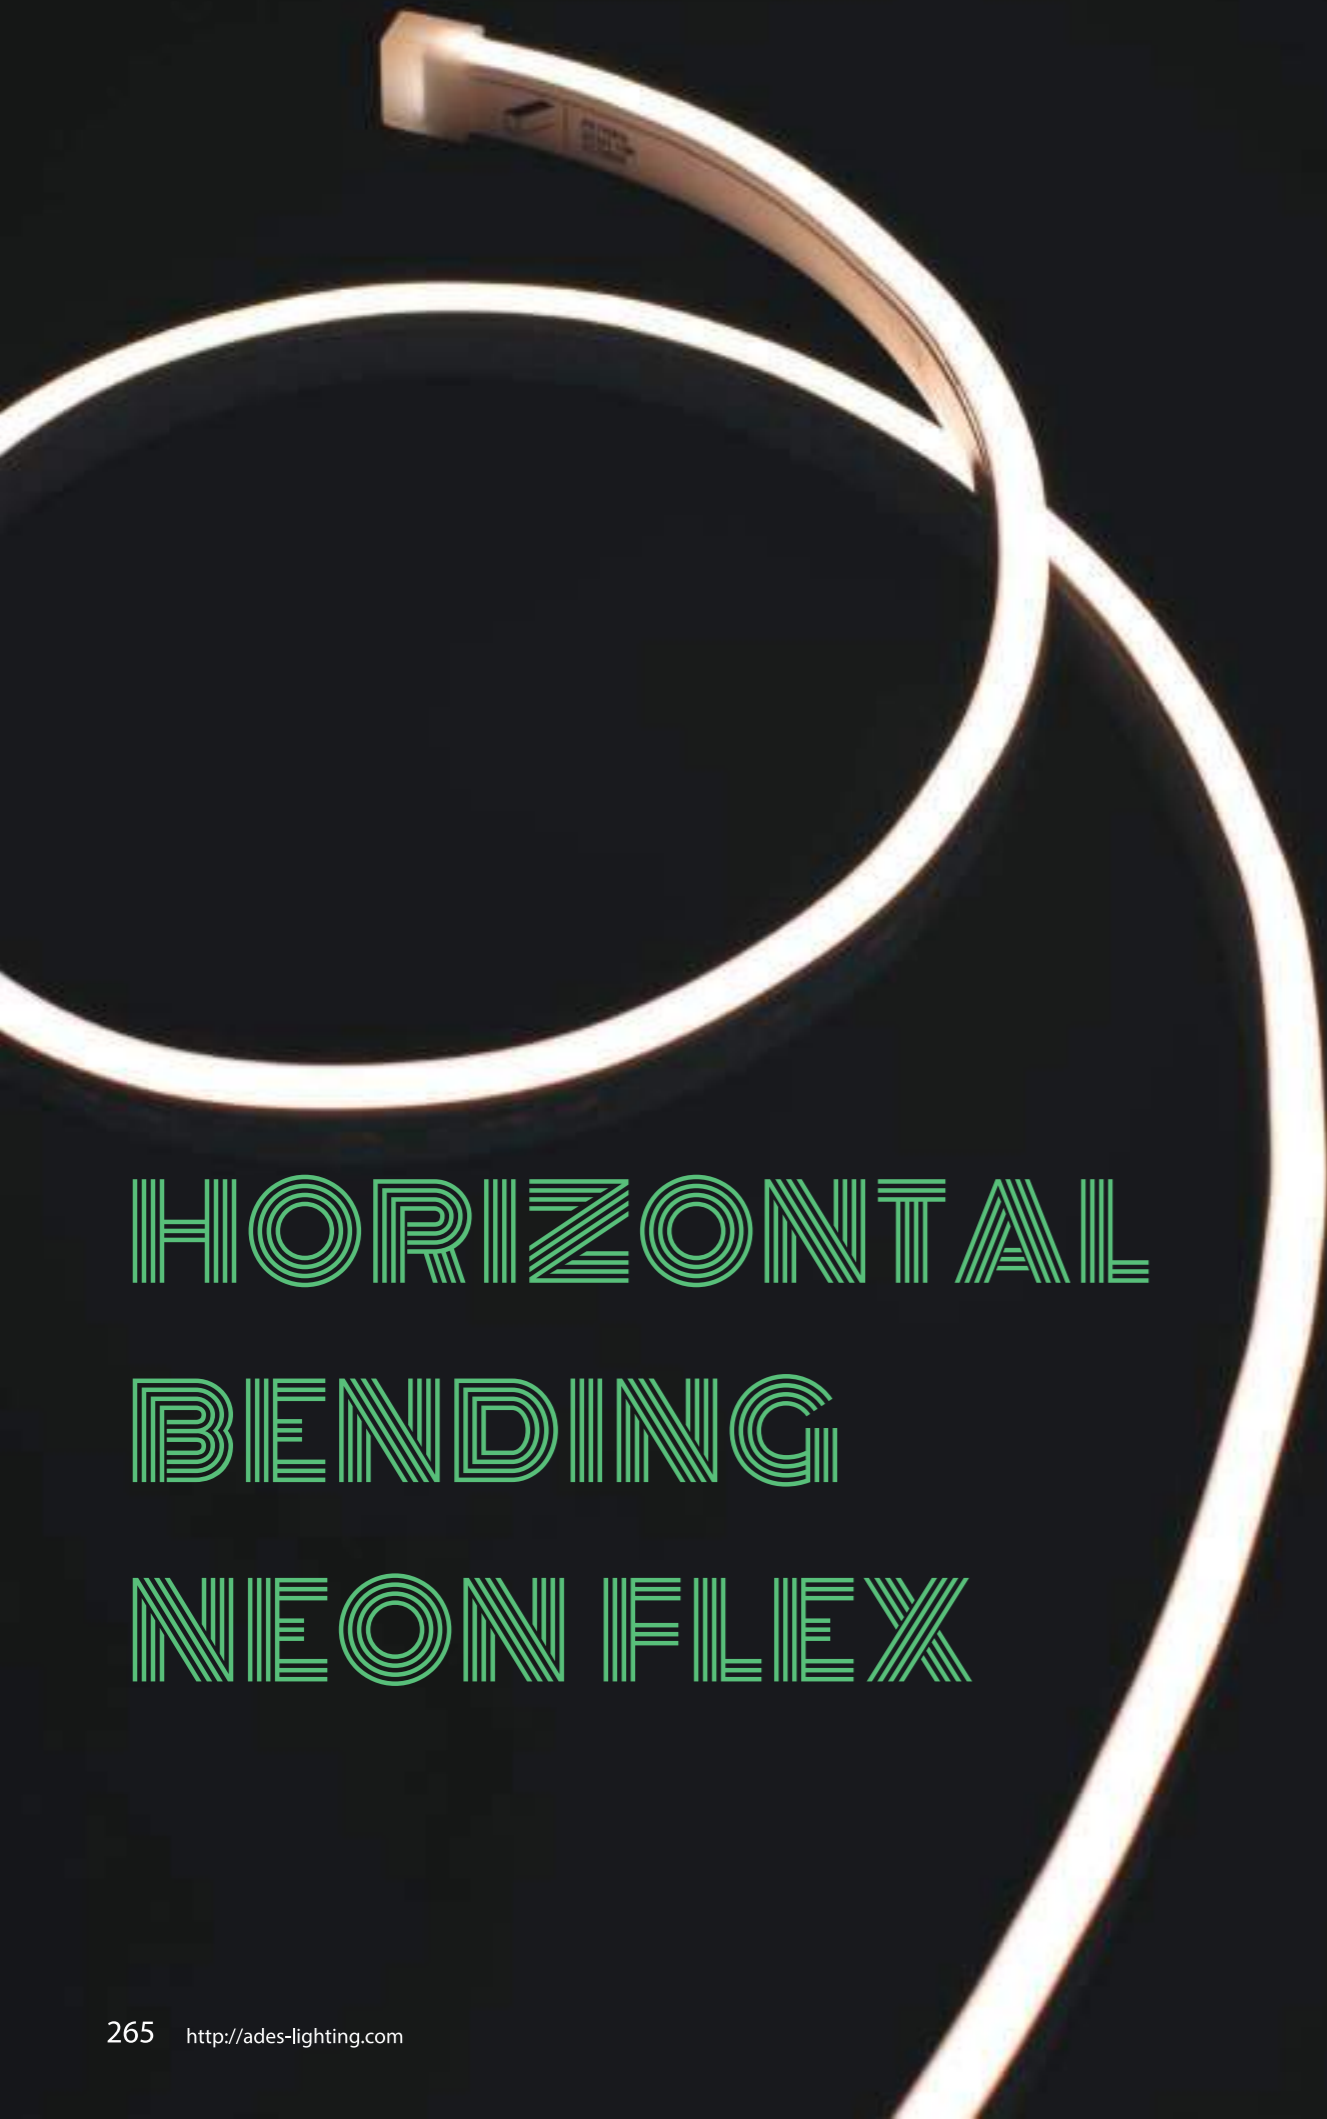


HORIZONTAL
BENDING
NEON FLEX



Model:	NTS1010-2405	NTS1010-2410
Power:	5W	10W

Dimensions:


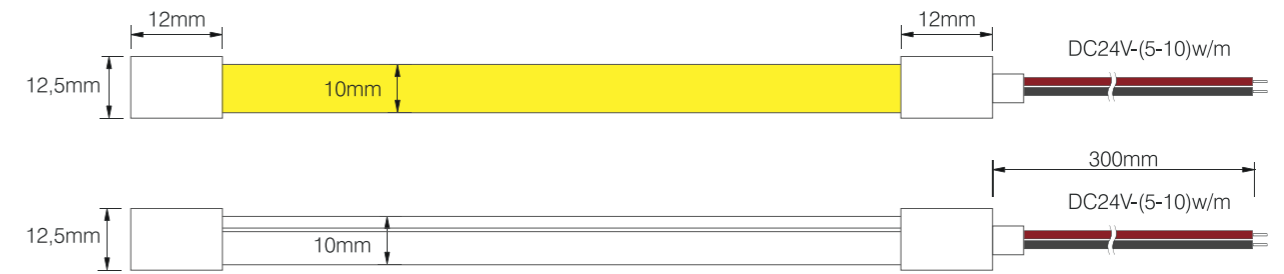


Accessories




General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V



Model:	NS1010-05	NS1010-10	NS0612-05	NS0612-10
Power:	5W	10W	5W	10W

Dimensions:


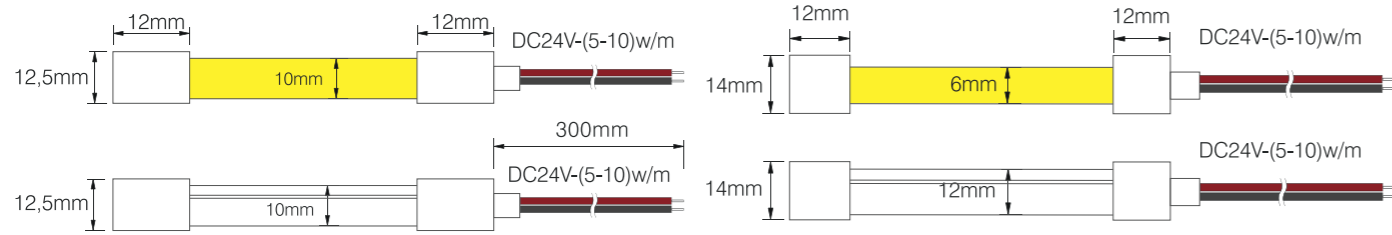


Accessories




General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

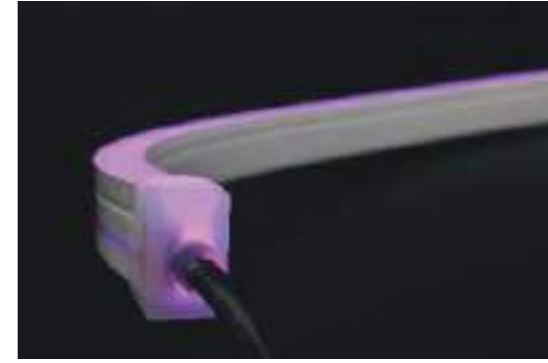

Model:	NT1010-05	NT0612-10	NT1010-10	NT1616-14	NT2020-14	NT3020-14
Power:	5W	10W	10W	14W	14W	14W

Dimensions:

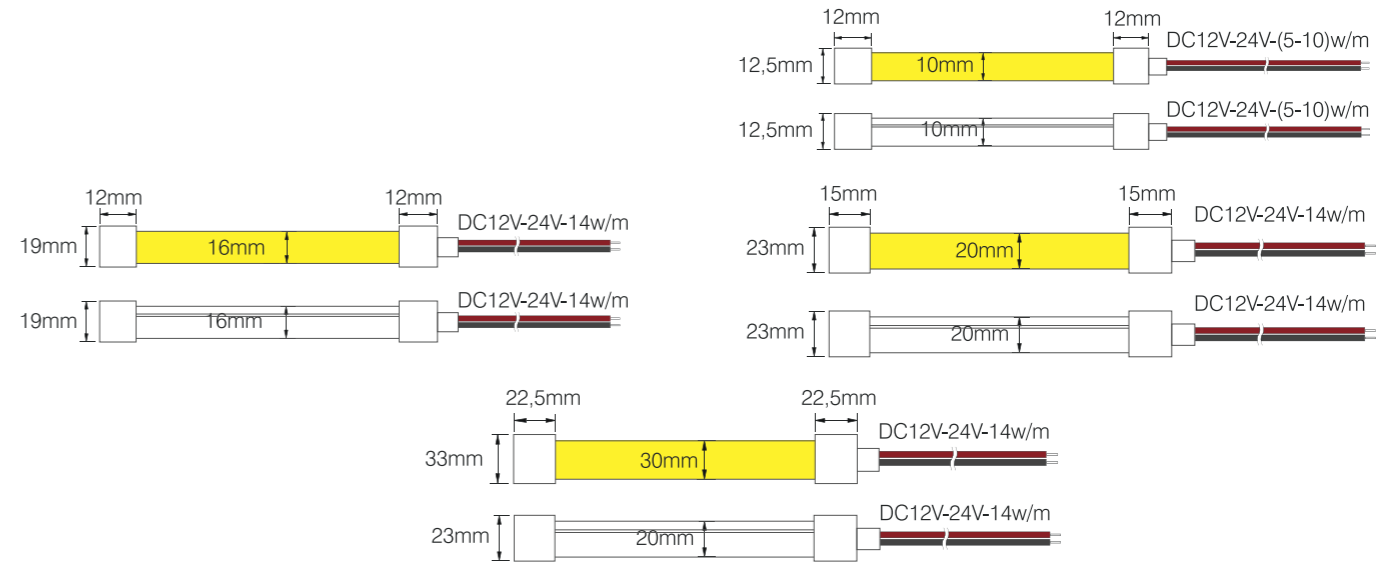


Accessories



General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC12V-24V

NEON STRIP

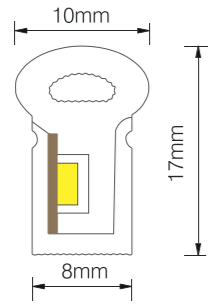

Model:	NS1017-05	NS1017-10
Power:	5W	10W

Dimensions:

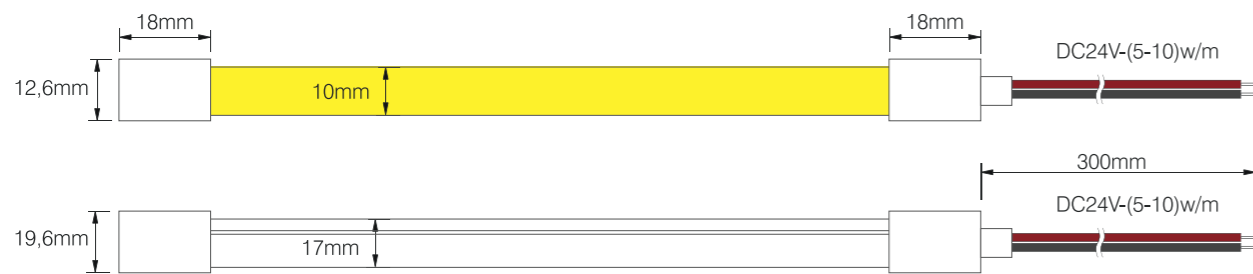


Accessories



General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

NEON STRIP

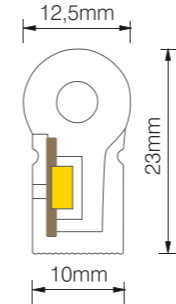

Model:	NS1223-05	NT1223-10	NT1223-15
Power:	5W	10W	15W

Dimensions:


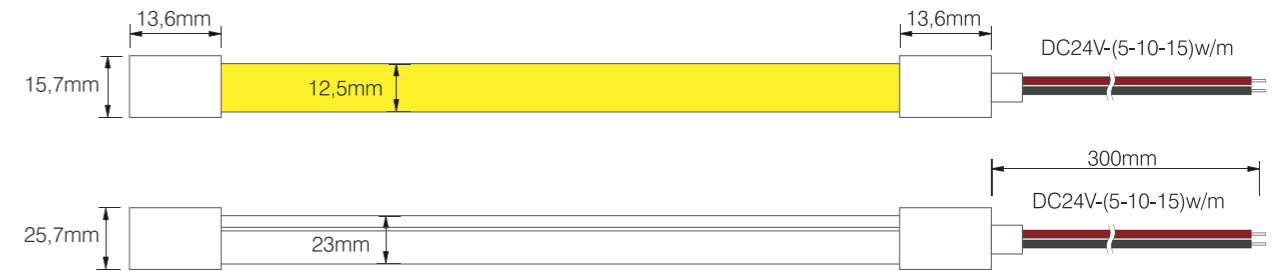


Accessories




General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

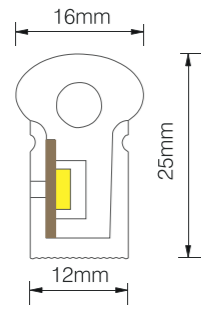


Model:	NS1625-05	NS1625-10	NS1625-15
Power:	5W	10W	15W

Dimensions:

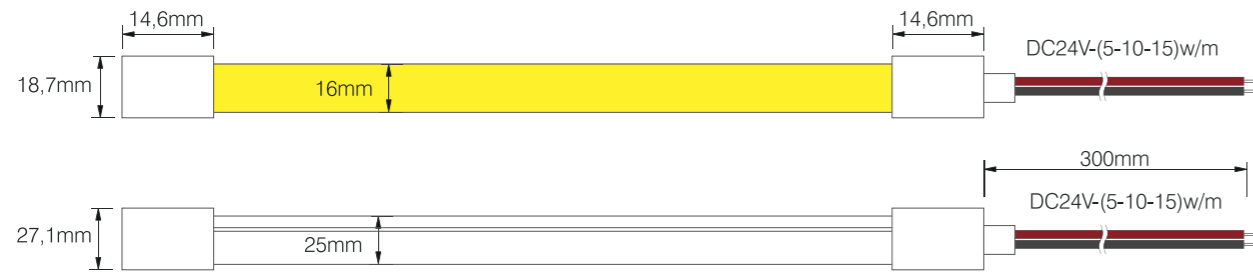

Model:	NS1516-05	NS1516-10	NT1516-15
Power:	5W	10W	15W

Dimensions:

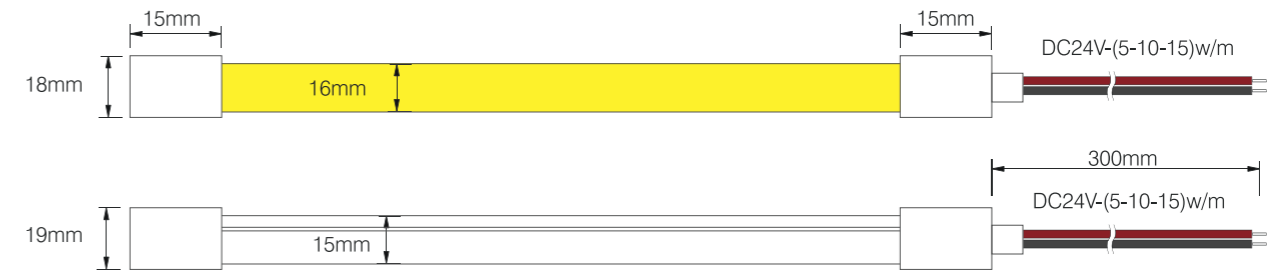

Accessories




Direct cable end cap Sealing end cap Aluminum profile Aluminum clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

Accessories

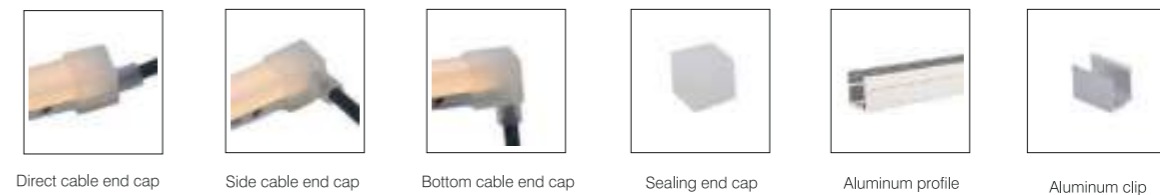

Direct cable end cap Side cable end cap Bottom cable end cap Sealing end cap Aluminum profile Aluminum clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V


NEON STRIP

NEON STRIP



Model:	NS2020-2405	NS2020-2410	NS2020-2415
Power:	5W	10W	15W

Dimensions:

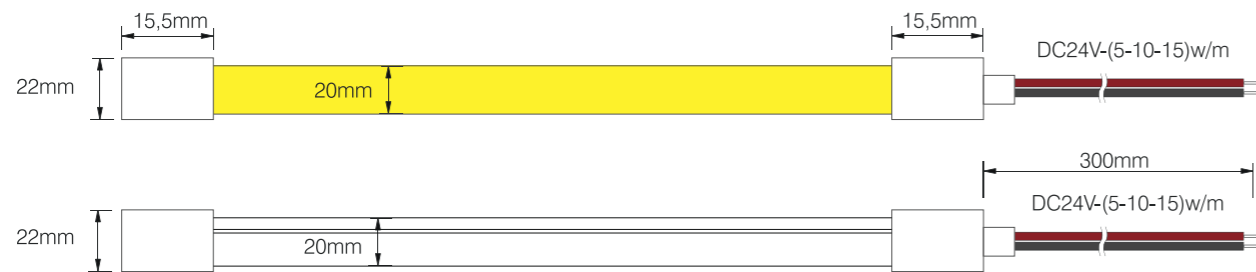

Accessories



Direct cable end cap Sealing end cap Aluminum clip Aluminum profile


General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V



Model:	NS1720-2410
Power:	10W

Dimensions:

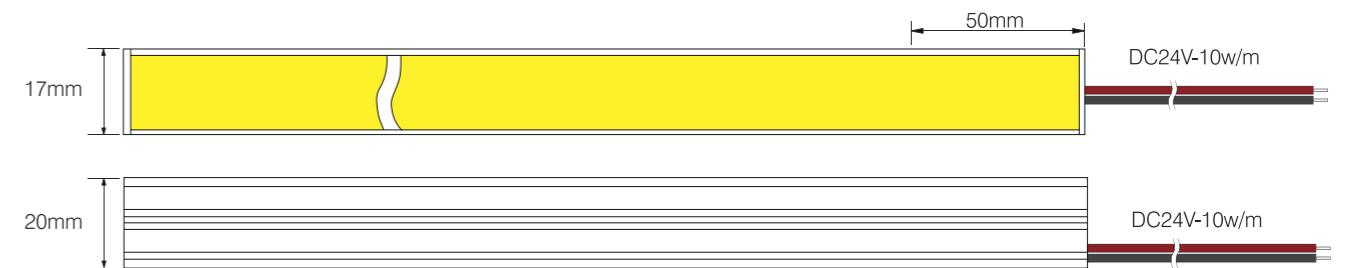

Accessories




End cap

General specifications


LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

3D BENDING



Model:	NS1819-2405	NS1819-2410
Power:	5W	10W

Dimensions:

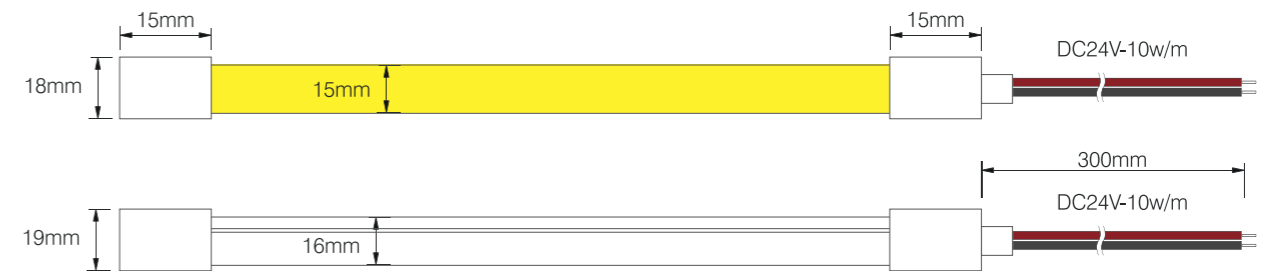

Accessories




General specifications

LED:	SMD
CRI(Ra):	> 90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V


360° VIEW NEON

NEON STRIP

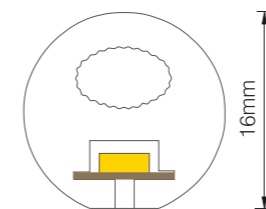

Model:	D16-05	D16-10
Power:	5W	10W

Dimensions:

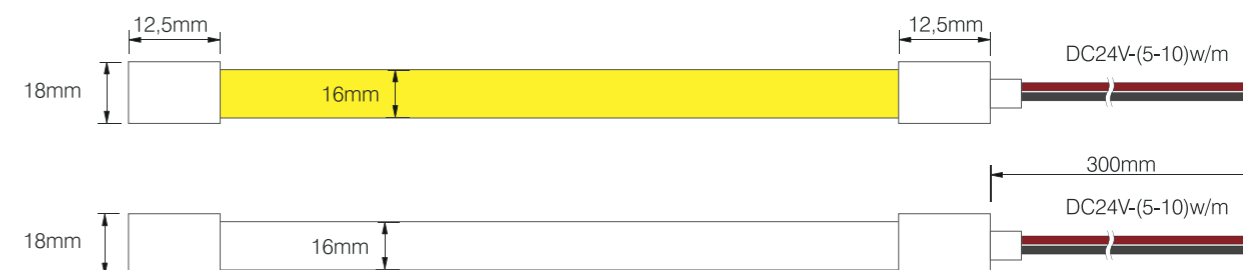

Accessories



Direct cable end cap



Silicone end cap




Clip

General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC24V

NEON STRIP



Model:	D25-05	D25-10
Power:	5W	10W
Dimensions:		




Accessories



General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC24V

NEON STRIP



Model:	D30-05	D30-10
Power:	5W	10W
Dimensions:		



Accessories




General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming, Dmx512
Voltage:	DC24V



Model:	CLS48005	CLS42010	CLS42015
Power:	5W	10W	15W

Dimensions:

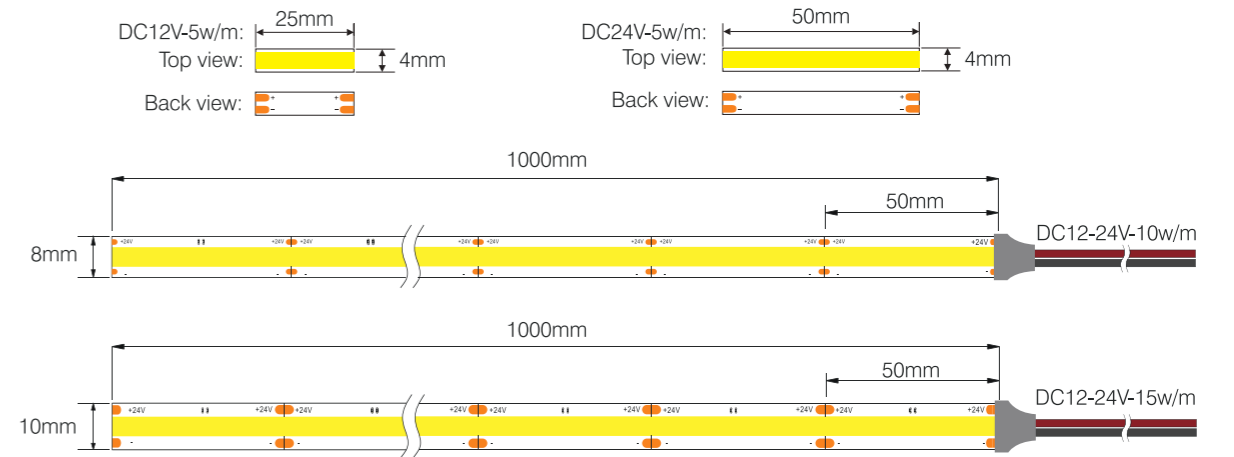


General specifications

LED:	COB
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC12V/ DC2V



Model:	SLS12012	SLS12020	SLS24024	SLS24028
Power:	12W	20W	24W	28W

Dimensions:

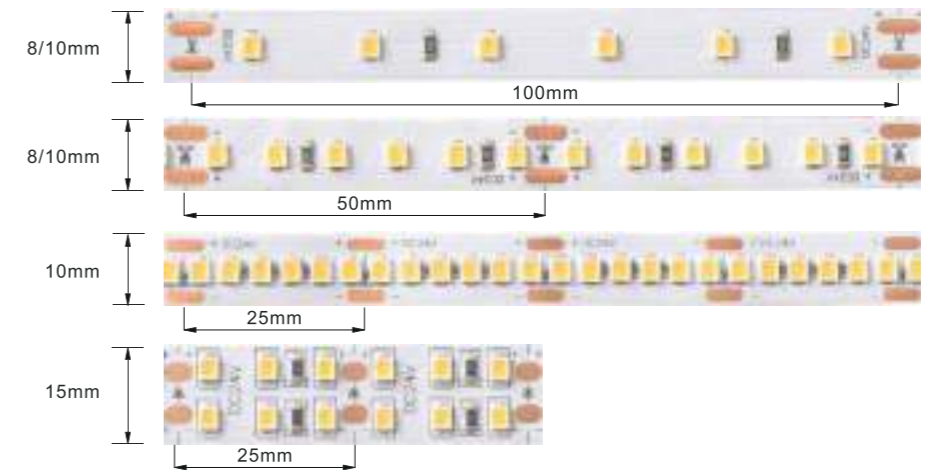


General specifications

LED:	SMD
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC12V/ DC24V



Model:	CL07-68	CL14-68
Power:	7,2W	14,4W
Dimensions:		

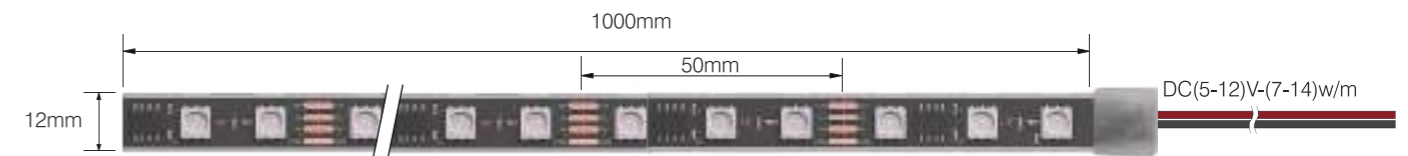


General specifications

LED:	WS IC 2815/ WS IC 16703
Pixels:	10px/m - 20px/m - 30px/m - 60px/m - 144px/m
CRI(Ra):	>80
CCT:	Full Color
IP rating:	68
Lifetime:	>50.000h
Control:	Dmx512
Voltage:	DC(5-12)V






LED STRIP



Model:	CL07-20	CL14-20
Power:	7,2W	14,4W
Dimensions:		

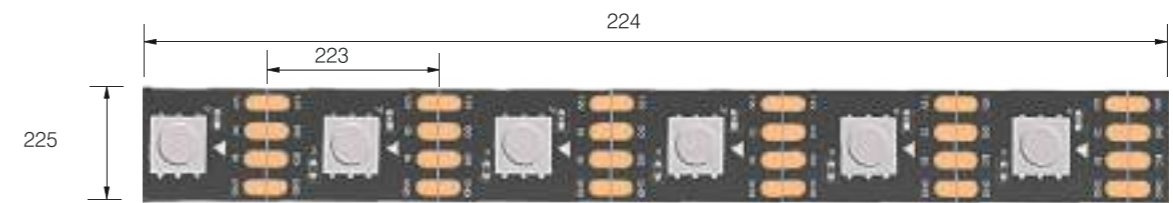

General specifications

LED:	SMD
Pixels:	10px/m - 20px/m - 30px/m - 60px/m - 144px/m
CRI(Ra):	>90
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Triac dimming
Voltage:	DC(12-24)V



MOON

Body color


● Matt Black

○ Matt White



RECESSED CEILING

Model	M100-03
Power	3W
Luminous	210lm
Dimensions	

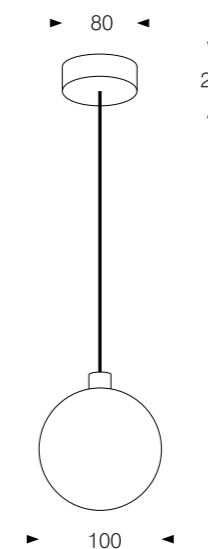

General specifications

CCT:	2700K/ 3000K/ 4000K
IP rating:	20
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali



Body color


● Matt Black

○ Matt White



RECESSED CEILING

Model	U400-28	U500-36
Power	28W	36W
Luminous	1800lm	2700lm
Beam angle	60°	60°
Dimensions		

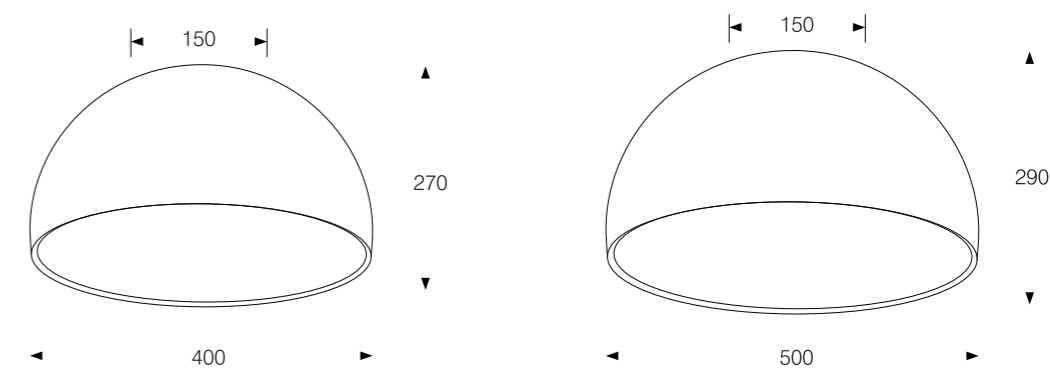

General specifications

CCT:	2700K/ 3000K/ 4000K/ 5500K/ 6500K
IP rating:	44
Lifetime:	>50.000h
Control:	On/ Off, Triac dimming, 0-10V, Dali, Zigbee, Bluetooth



DECORATE

UP
↓
DOWN



Air Gesture



Specifications


Size: D400mm/ D580mm

Body Color: Gold Rose/ Bright Black
Plating Chrome/ Chrome



Tunable white 2700K - 5700K

Tunable white enables you to perfectly illuminate work plain and ideally emphasise environment. Warm white light colours is suitable for relaxing and winter time. Neutral or cool white light colours are ideal for helping maintain performance and concentration for a longer time.



Dimmable 5%-100%

Dimmable function give you flexibility to choose the preferred illuminance level.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— THE WALL LAMP




UNMATCHED LIGHT
EFFECT
PERFORMANCE


SMALL SIZE LED / 24W

BIG SIZE LED / 36W

Ultra-high-quality surface treatment, 5 procedures, double-layer plating process, quality texture


Original installation structure, no exposed screws, concise and technological sense

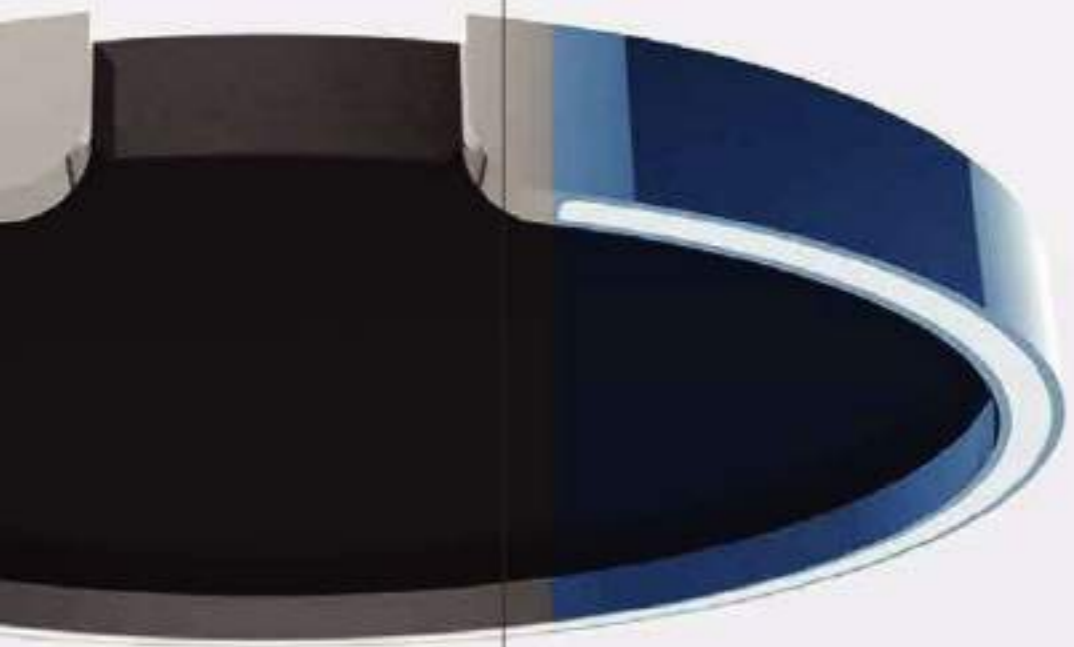

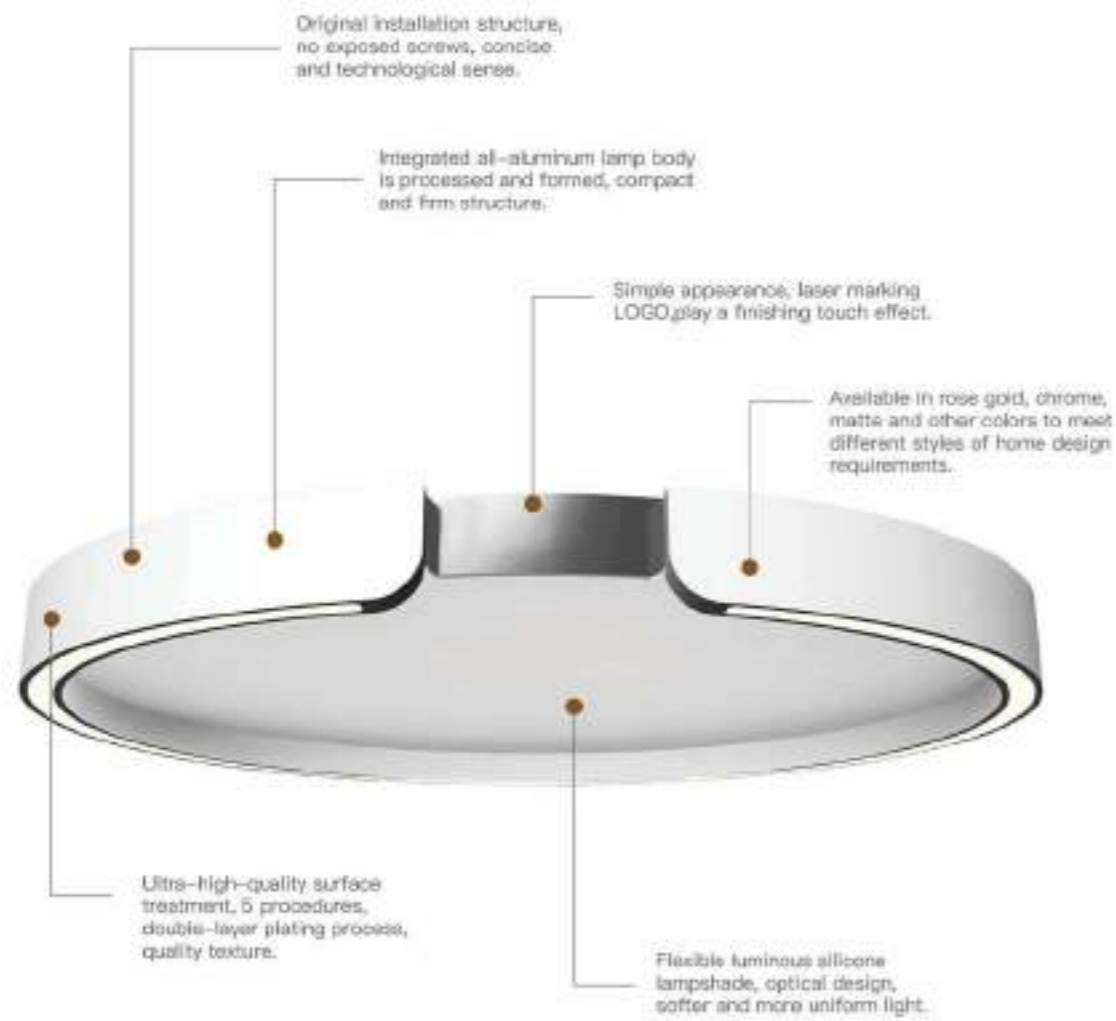

PRODUCT DESCRIPTION

Perceived light gives the world artistic charm.

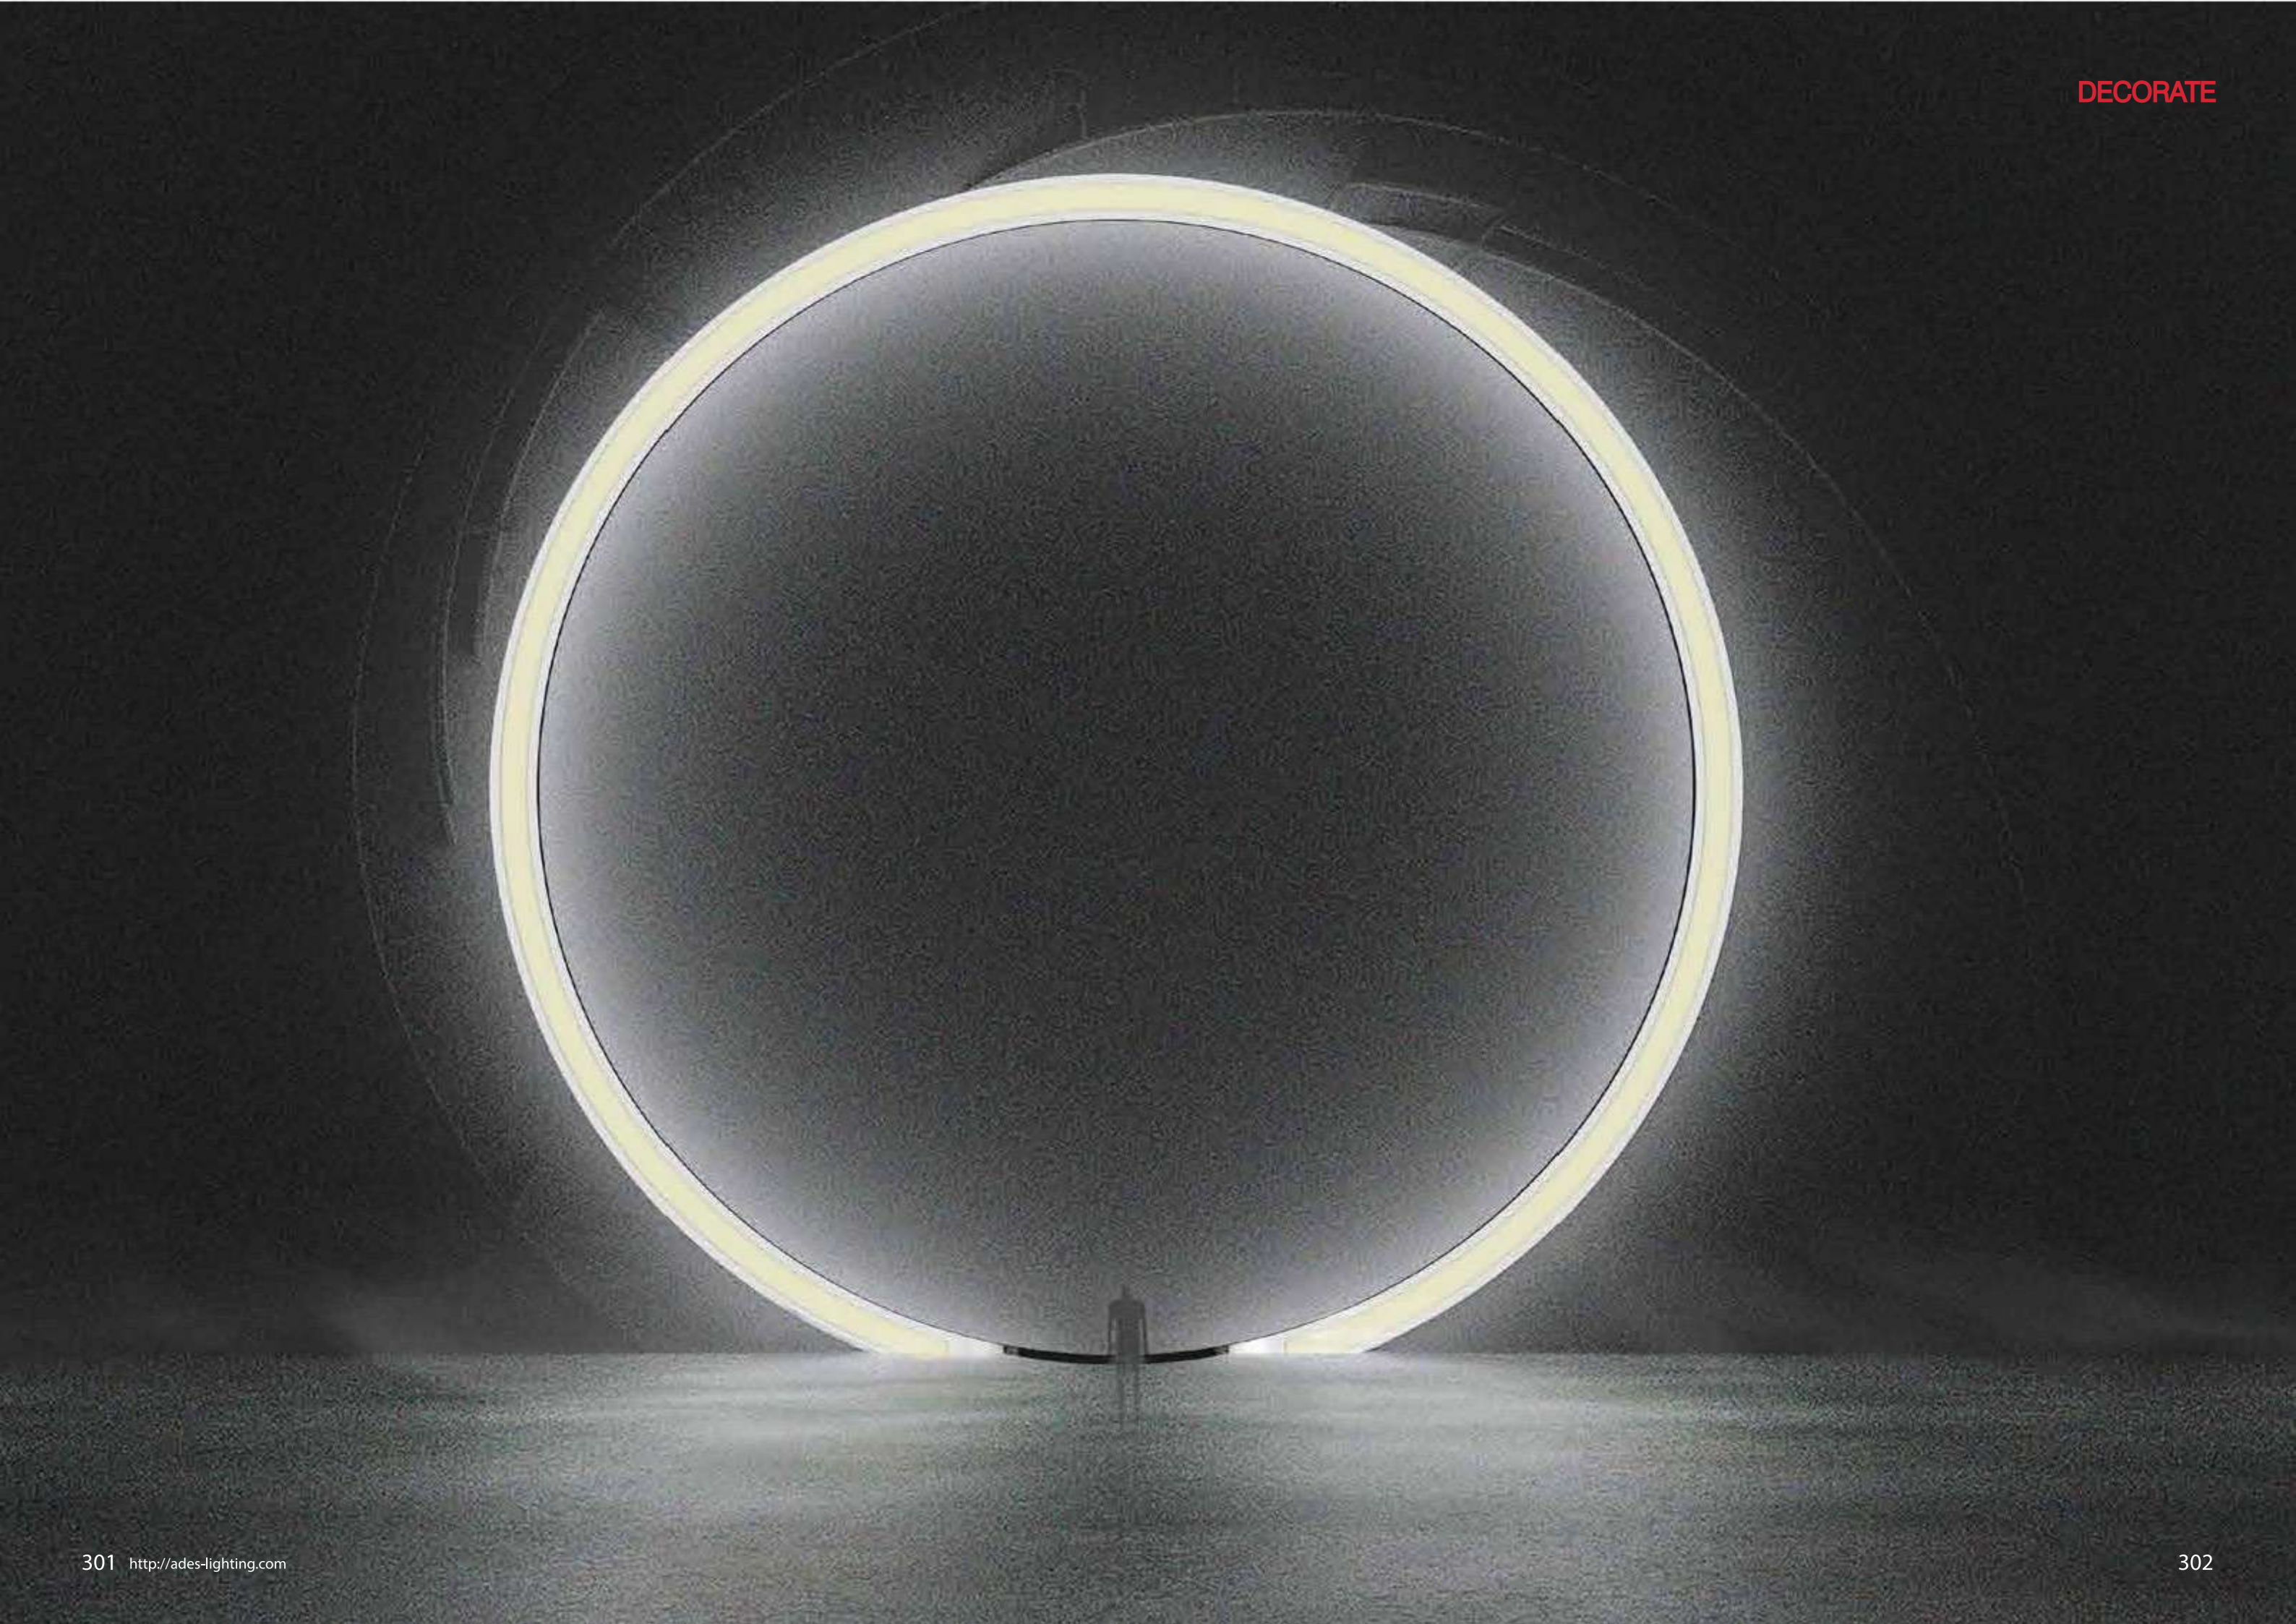



DECORATE


CRESCENT SERIES

SOFT
ART
COMFORTABLE

—
CHARACTERISTIC



Install

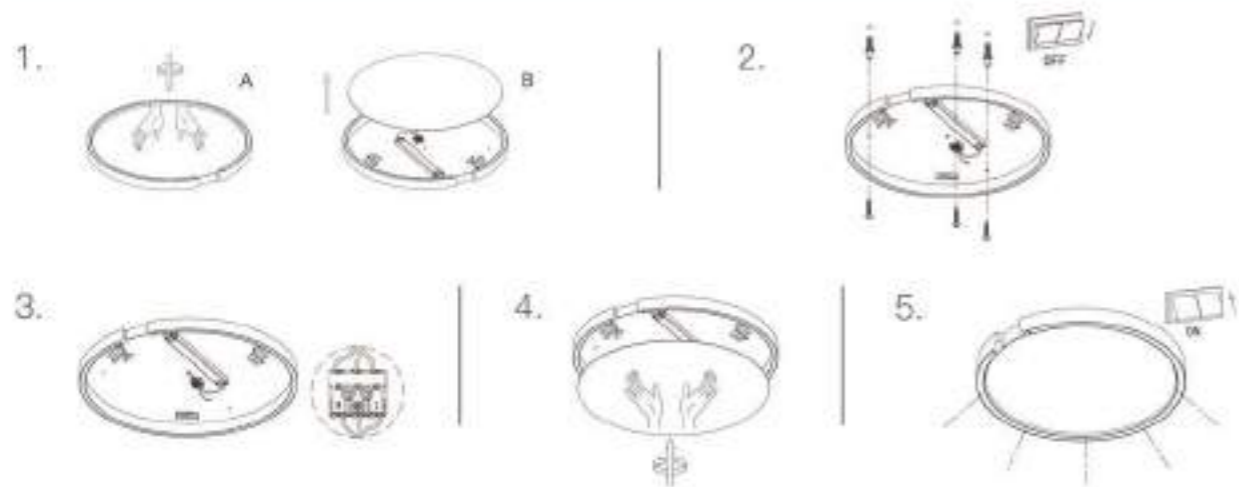

SURFACE

SCL0049-01A-024



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Ceiling lamp	Surface mount	Ø400x50	Rose Gold	P20	24W	1050Lm	120°	2700K 4000K	Ra>90
Other Finish	Chrome/Matte White								

SCL0049-01A-036



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Ceiling lamp	Surface mount	Ø550x50	Matte White	P20	36W	2520Lm	120°	2700K 4000K	Ra>90
Other Finish	Rose Gold/Chrome								

CRESCENT SERIES

**C-shaped
ceiling light**



Characteristic:



[Crescent Series] C-shaped ceiling light, The design inspiration comes from a crescent moon, which means that a beautiful hope is coming, giving people infinite hope, and setting out a soft and comfortable home art atmosphere.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

DECORATE





PRODUCT DESCRIPTION

Perceived light gives the world artistic charm




┌
**COMFORTABLE
SOFT
DESIGN**

—
CHARACTERISTIC






Install

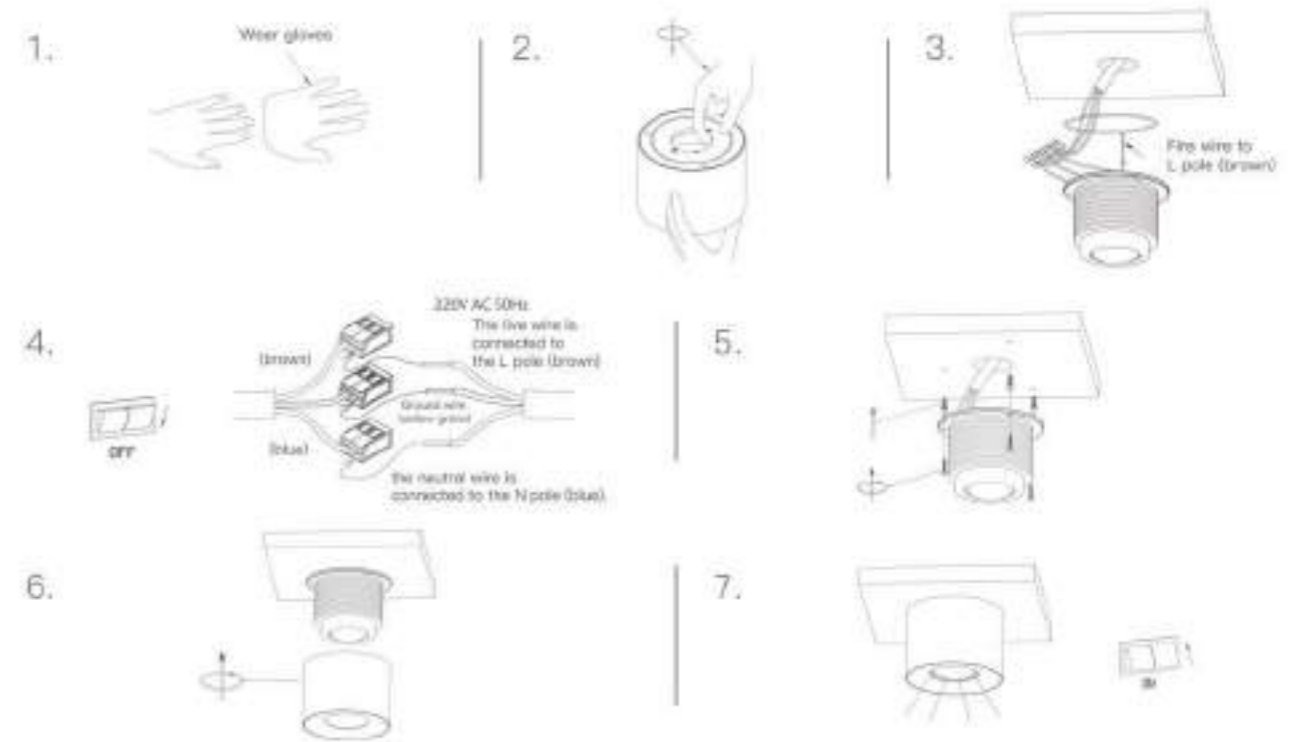

Install

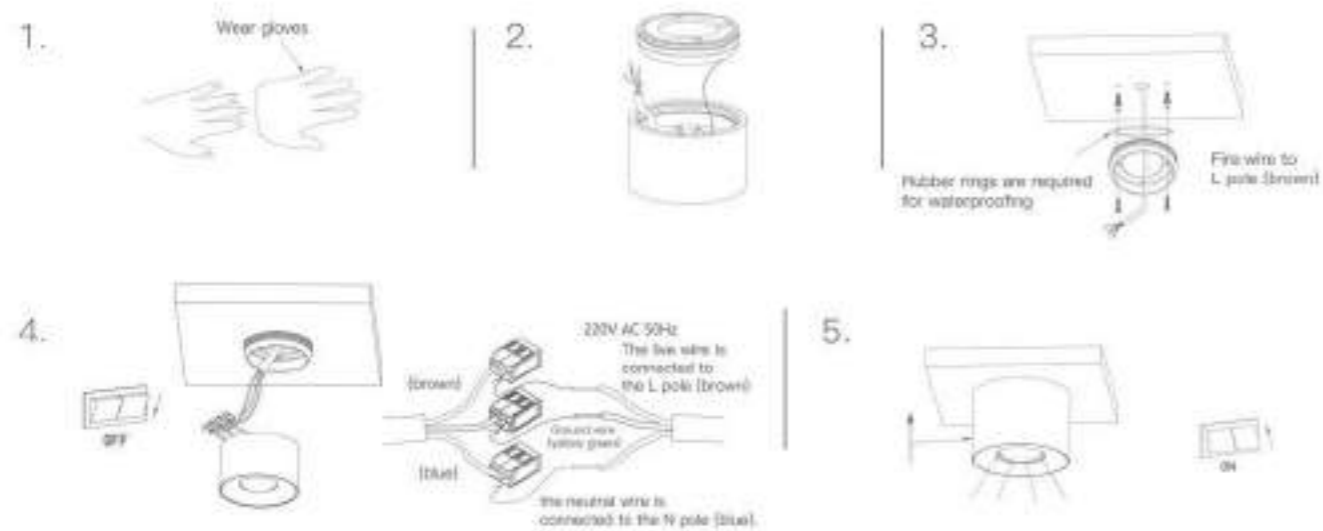

SCL0046-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted downlight	Surface mount	1260*48	Chrome	IP20	9W	200Lm	70°	2700K 4000K 5000K	Ra>90
Other Finish		Rose Gold/Sand white/Bright black							

SDL0046-01A-012



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted downlight	Surface mount	Φ110*50	Chrome	IP20	12W	560Lm	70°	2700K 4000K 5000K	Ra>90
Other Finish		Rose Gold/Sand white/Bright black							

MAGIC MIRROR SERIES

Surface mounted
convex lens
downlight



Characteristic



[Magic mirror series] Surface mounted convex lens downlight. The appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— SURFACE MOUNTED LARGE CONVEX LENS DOWNLIGHT



Luminous angle



UNMATCHED LIGHT EFFECT PERFORMANCE

GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.



THE ART OF MINIMALISM

LIGHTING



Exquisite and round design, perfect combination of aesthetics and engineering.
Ultra-high-quality surface treatment, 5 procedures,
double-layer electroplating process, high-quality texture.

LIGHTING SCHEME

Feel the simple beauty of space



APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space. Rigart Light provides the best solution for home space.



Hotel club lighting design is the best way to show the style and taste of hotel clubs. Lighting must not only consider functionality, but also consider the integration of artistry and style. Rigart Light creates an exclusive artistic atmosphere for the hotel club.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.




The lighting design of the dining bar plays a vital role in the atmosphere of the entire space and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.

COMFORTABLE
ART
ELEGANT

CHARACTERISTIC




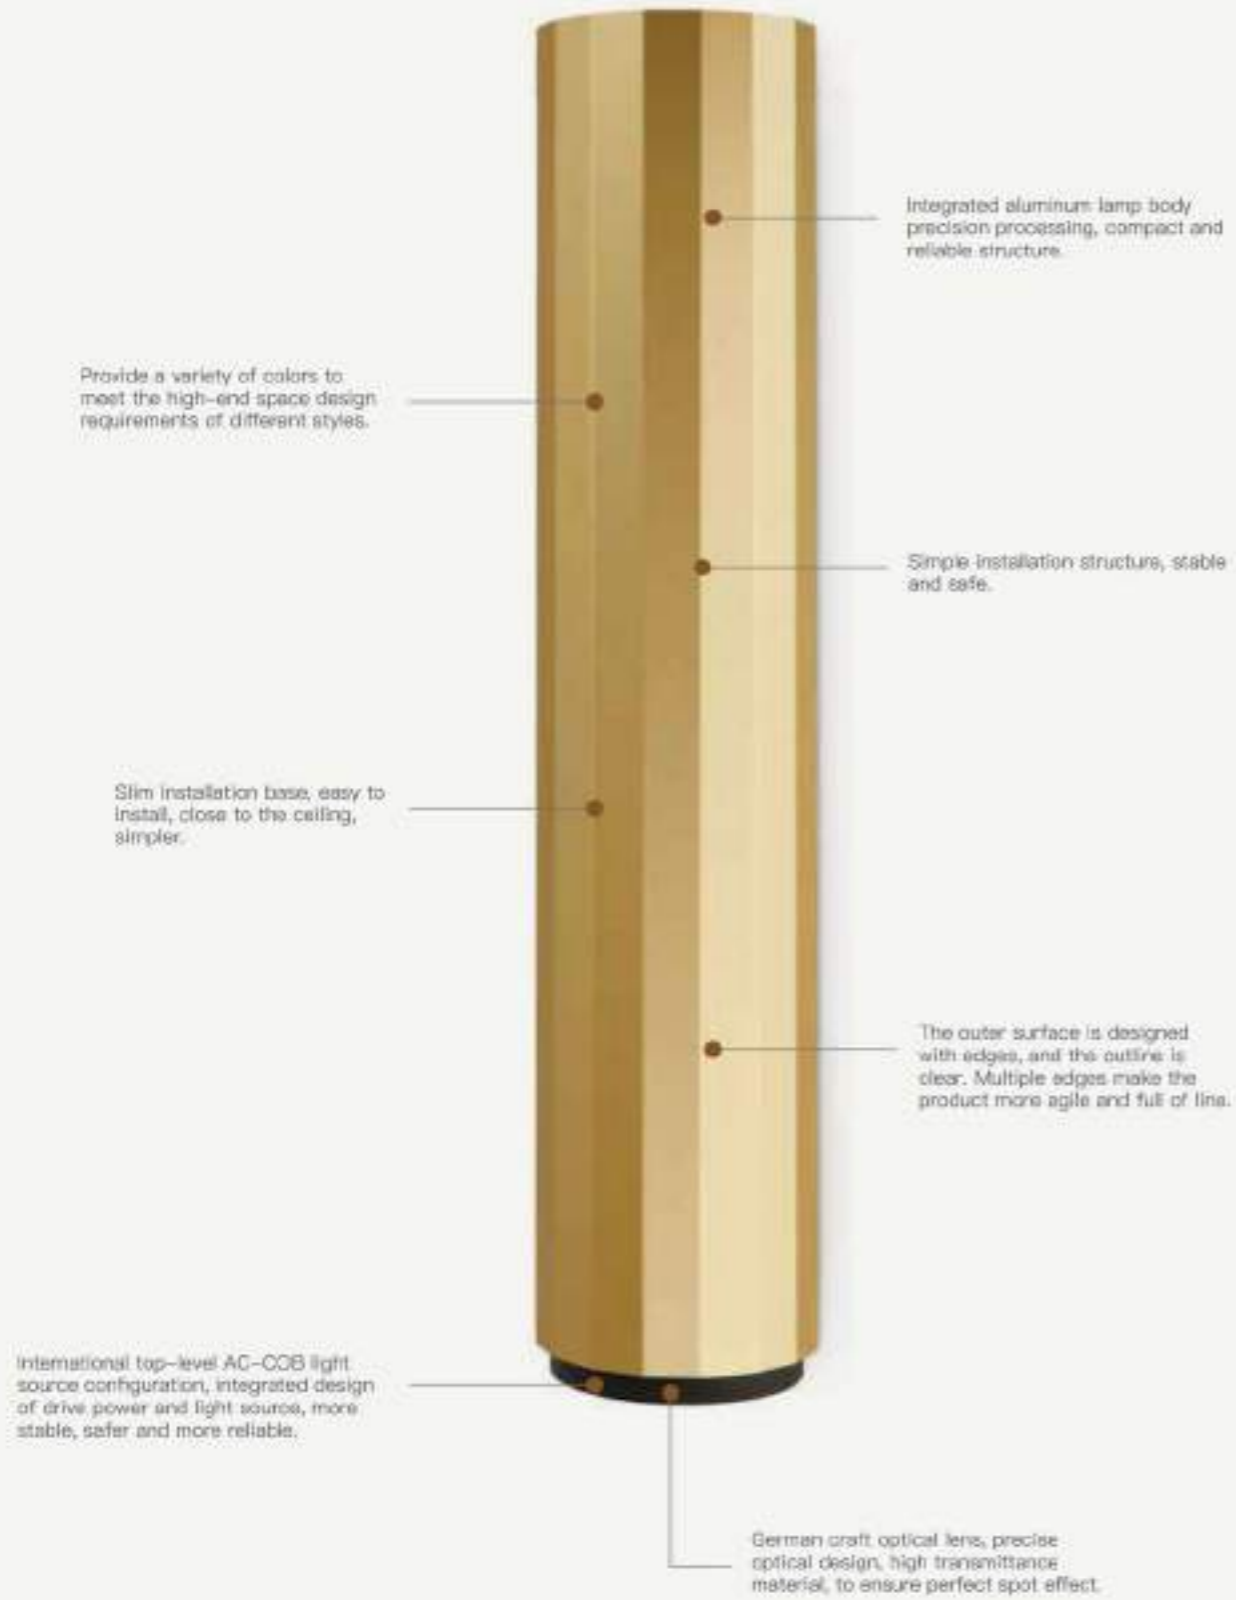

PRODUCT DESCRIPTION

Perceived light gives the world artistic charm.

Install

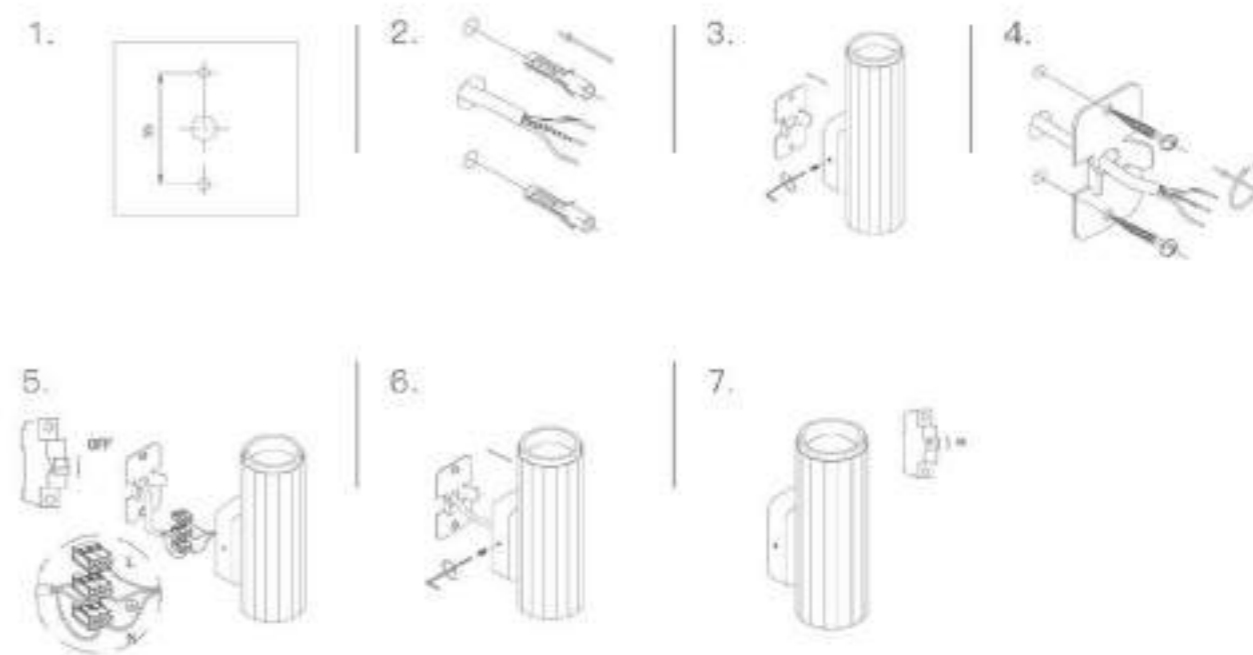

SWA0041-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CR
Wall lamp	Surface mount	160*50*68	Green gold	IP20	2W	300lm	81°	2700K 4000K	Ra>90
Other Finish		Matte white/Matte Black							

SWA0041-01B-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CR
Wall lamp	Surface mount	210*50*68	Green gold	IP20	2W	350lm	81°	2700K 4000K	Ra>90
Other Finish		Matte white/Matte Black							

SWA0041-01C-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CR
Wall lamp	Surface mount	260*50*68	Green gold	IP20	2W	300lm	81°	2700K 4000K	Ra>90
Other Finish		Matte white/Matte Black							

SWA0041-01D-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CR
Wall lamp	Recessed	310*50*68	Green gold	IP20	2W	300lm	81°	2700K 4000K	Ra>90
Other Finish		Matte white/Matte Black							



CHARACTERISTIC

COMFORTABLE
ART
ELEGANT


DIAMOND



PRODUCT DESCRIPTION

Perceived light gives the world artistic charm.

Install

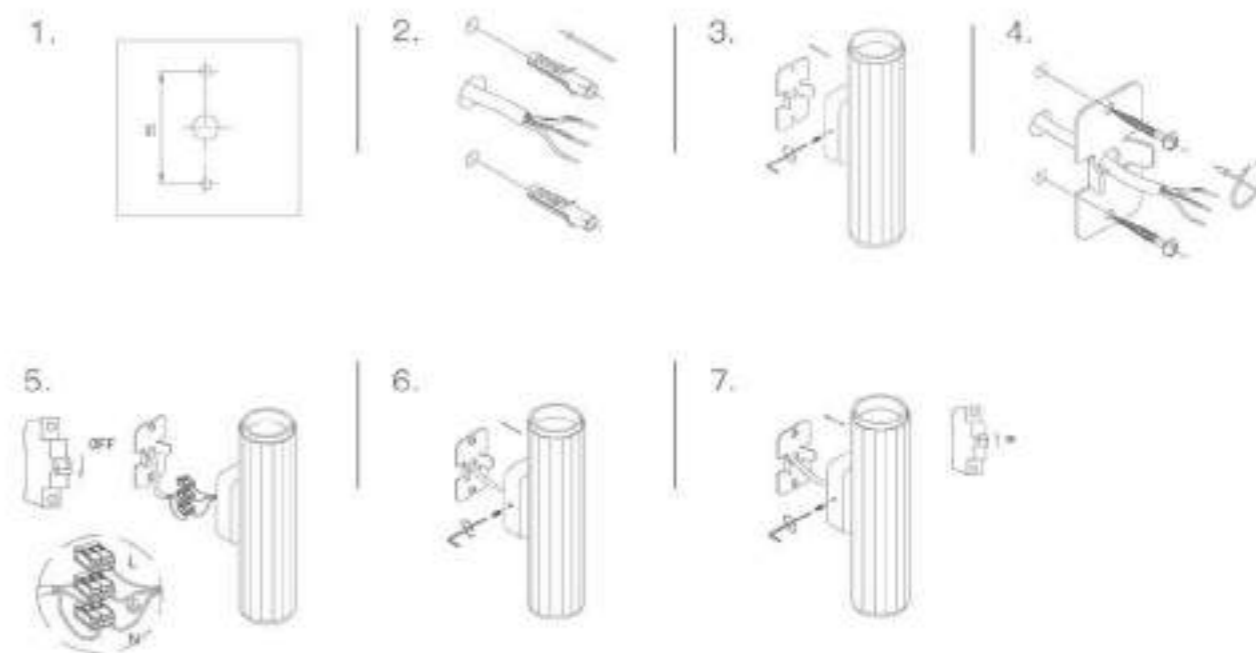

SWA0041-01A-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	210*50*58	Green gold	IP20	10W	540lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01B-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	310*50*58	Green gold	IP20	10W	540lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01C-016



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	410*50*58	Green gold	IP20	10W	540lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

SWA0041-01D-016




Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Wall lamp	Surface mount	510*50*58	Green gold	IP20	10W	540lm	80°	2700K 4000K	Ra>90
Other Finish	Matte white/Matte Black								

MAGIC MIRROR SERIES

Convex lens wall light



Characteristic



[Magic mirror series] Convex lens wall light, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



Figart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.



Luminous angle

— LARGE CONVEX LENS WALL LIGHT



LED / 4Wx2
LED / 6Wx2

UNMATCHED LIGHT
EFFECT
PERFORMANCE

THE ART OF MINIMALISM


LIGHTING



Wide light
distribution
90°

LIGHTING SCHEME

Feel the simple beauty of space

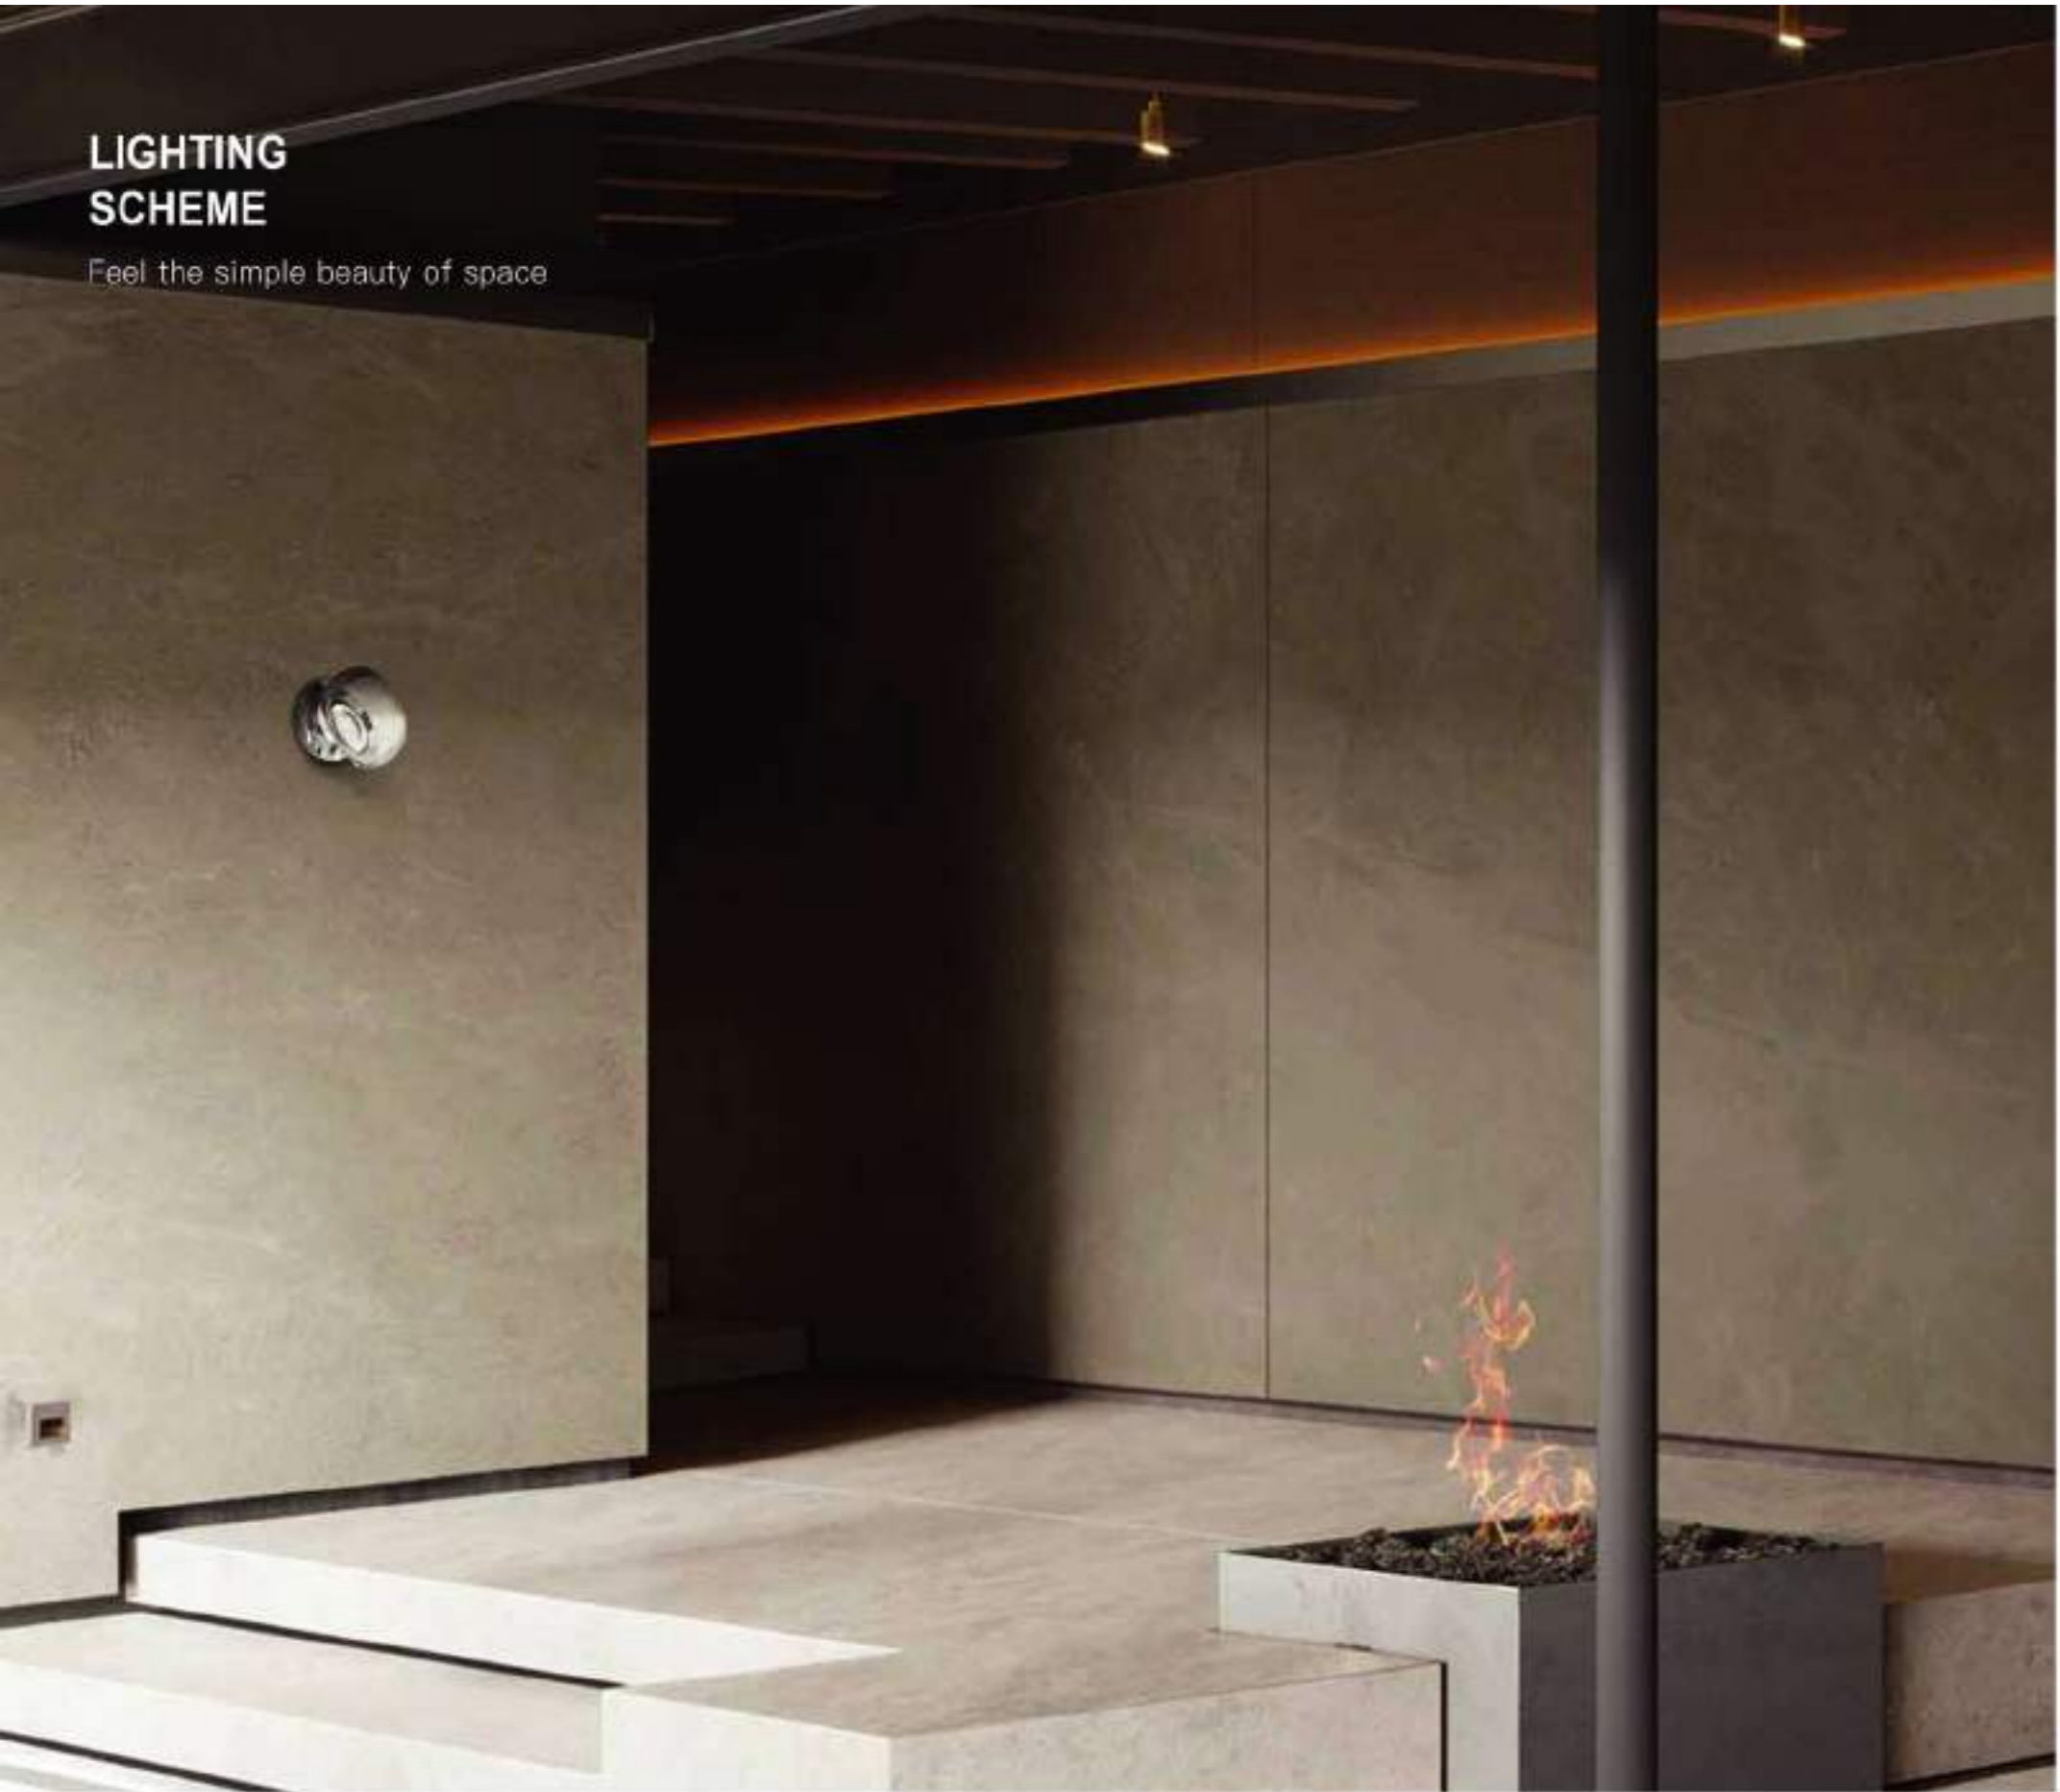

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart follows a reasonable, healthy and comfortable light environment for the office.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.

PRODUCT DESCRIPTION

Perceived light gives the world artistic charm

350 degree rotation design, easy to achieve artistic lighting effects.



Simple installation structure, stable and safe.

Exquisite packaging and display, thoughtful design, so that every time a customer opens a product, it is full of ritual.

German craft optical lens, precise optical design, high transmittance material, to ensure perfect spot effect.

Exquisite and round design, perfect combination of aesthetics and engineering.

Integrated aluminum lamp body precision processing, compact and reliable structure.

Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.


International top-level AC-COB light source configuration, integrated design of drive power and light source, more stable, safer and more reliable.



MAGIC MIRROR SERIES

The appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



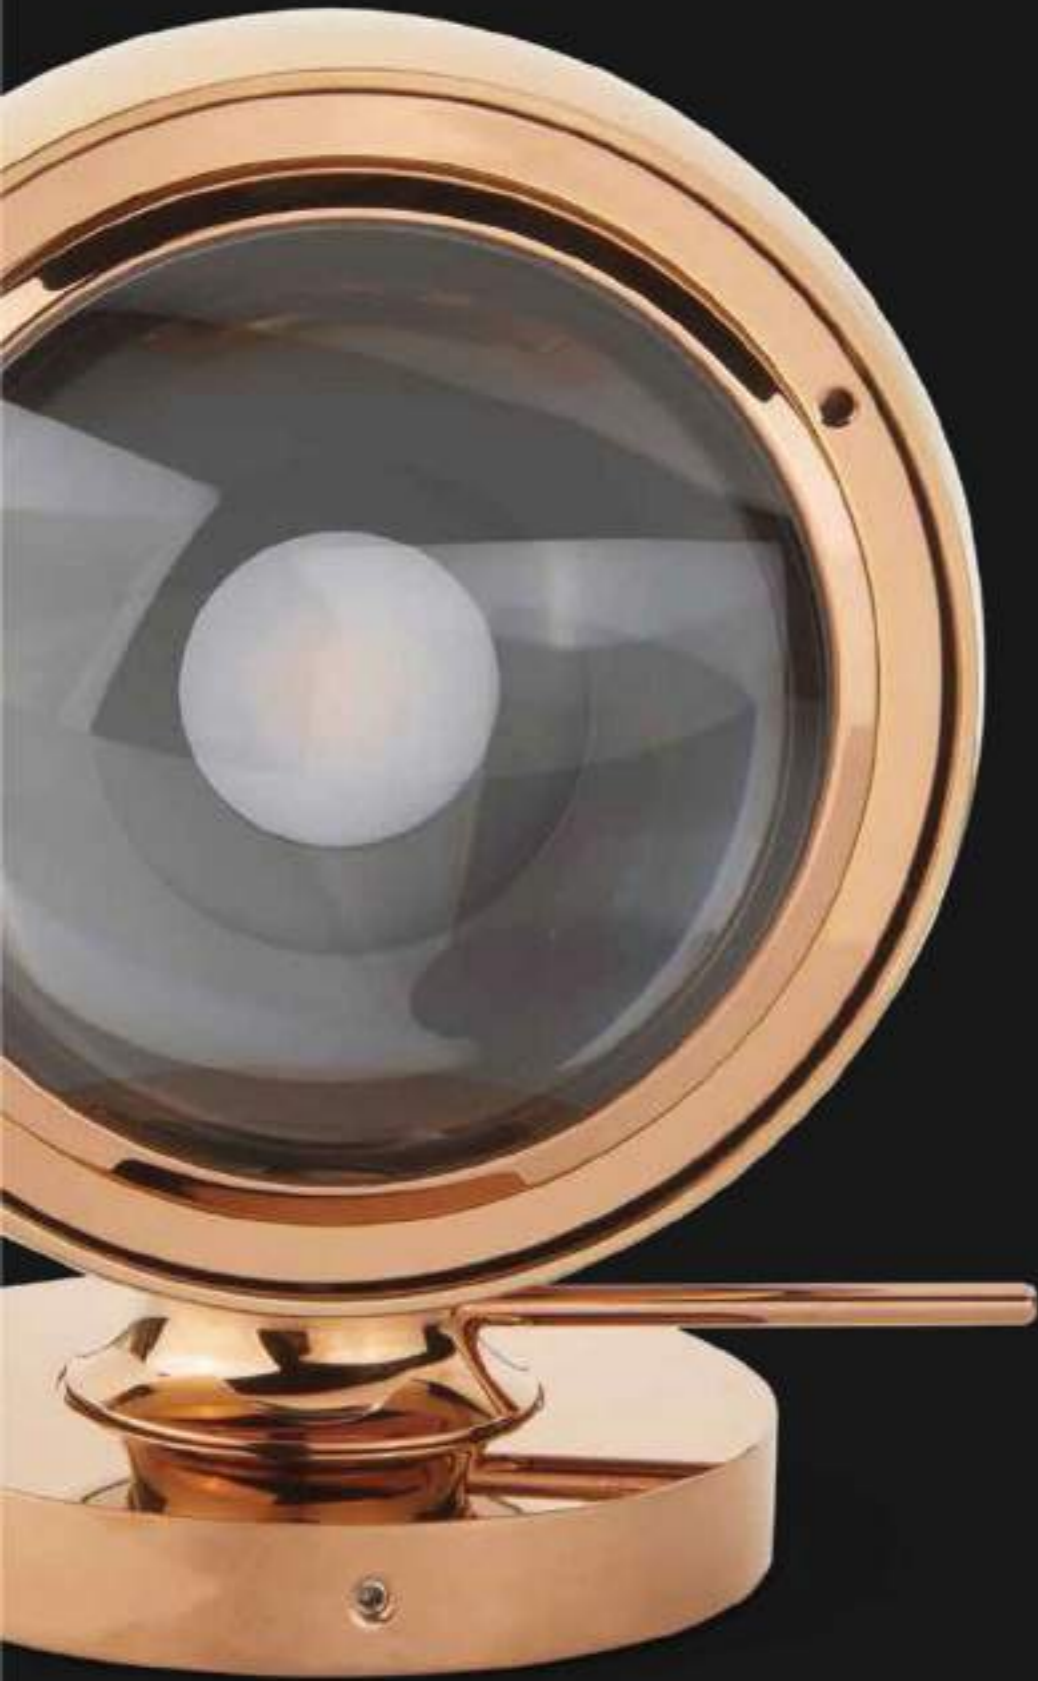


COMFORTABLE
SOFT
DESIGN

CHARACTERISTIC



Install

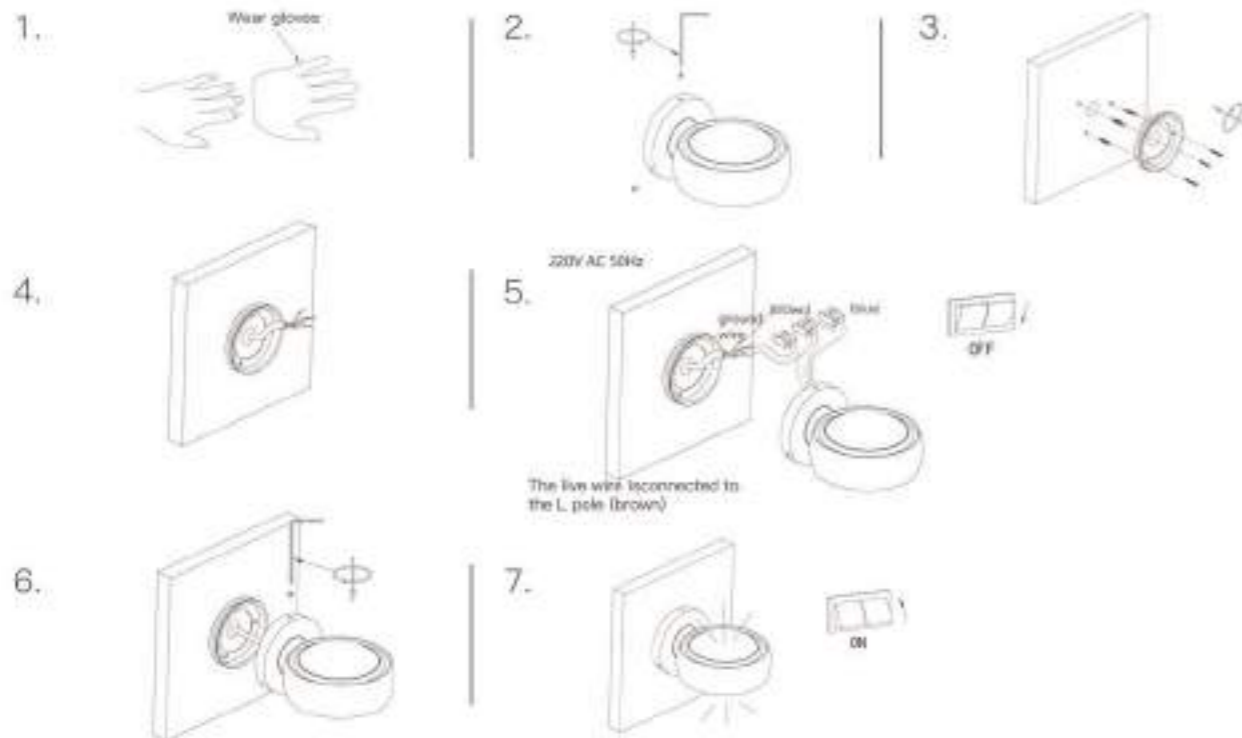

SWA0042-01A-008



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	
Wall lamp	Surface mount	105.8*60*34	Chrome	IP20	4Wx2	290Lm	90°	2700K	4000K
Finish Other	Sand white/Bright black								

SWA0042-01B-012



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	
Wall lamp	Surface mount	142.8*120*40	Chrome	IP20	6Wx2	410Lm	90°	2700K	4000K
Other Finish	Rose Gold/Sand white/Bright black								

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— MULTI-EDGE CHANDELER



Narrow light Wide light Extremely wide light

LED / 5W

UNMATCHED LIGHT EFFECT PERFORMANCE

THE LIGHT IS SOFT AND NATURAL LIKE WATER SEEPING OUT

The outer surface is designed with edges, and the outline is clear. Multiple edges make the product more agile and full of line.



VISUAL COMFORT

More natural soft beam, more beautiful artistic atmosphere



Light effect is natural, comfortable, soft and even, let you indulge in the atmosphere full of artistic beauty

Commercial Lighting

DECORATE



2700K

Warm light is suitable for warm and quiet environments such as restaurants, hotels, cafes, and private clubs.



4000K

Neutral light is close to natural light, which is suitable for places such as living room and lobby that need warm white light.



5000K

Cold white light is like the bright sun at noon, which has high lumen and color rendering, and has a wide range of applications.

710lm /Model

Provide a wide range of luminous power levels and beam angles, making it suitable for uniform lighting design of facades of different heights.

710lm

Reference neutral white model

710lm		5W
710lm		5W
710lm		5W
710lm		5W

The value of the flux and power of the beam is rated.

LIGHTING SCHEME

Feel the simple beauty of space



DECORATE

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space. Rigart Light provides the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.


PRODUCT DESCRIPTION

Perceived light gives the world artistic charm.



Perceive the artistic charm of the world

Appearance color contrast
Pantone color card, blending with
the light luxury style and simple
style in home decoration.

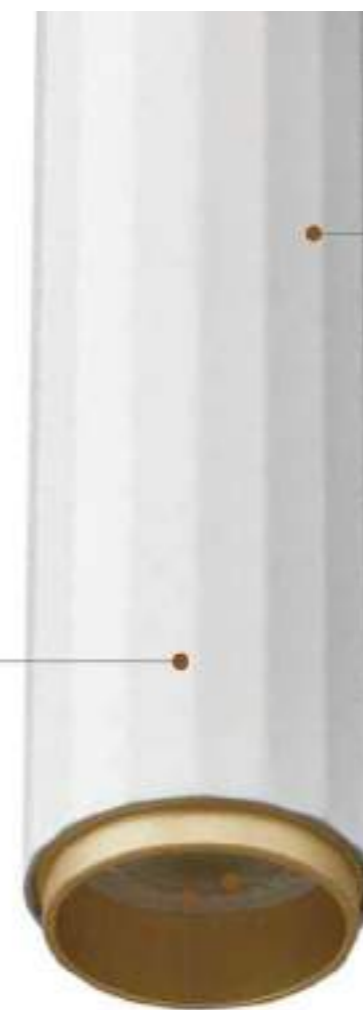

The outer surface is designed with
edges, and the outline is clear.
Multiple edges make the product
more agile and full of line.

Different from traditional spotlights,
the light is soft and natural like water
seeping out.

Evenly irradiated, natural
but not stiff.





PENDANT

SPL0010-01A-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	465*2200	White + Gold	IP20	5W	710lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	White + Black/Black + Gold/Black + Black/Gold + Black								

SPL0010-01B-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	465*2300	Gold + Black	IP20	5W	710lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	White + Gold/Black + Gold/Black + Black/Gold + Black								

SPL0010-01C-005




Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	465*2400	Black + Gold	IP20	5W	710lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	White + Black/White + Gold/Black + Gold/Black + Black								

SPL0010-01D-005



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Pendant lamp	Surface mount	465*2500	White + Black	IP20	5W	710lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	White + Gold/Black + Gold/Black + Black/Gold + Black								

Install

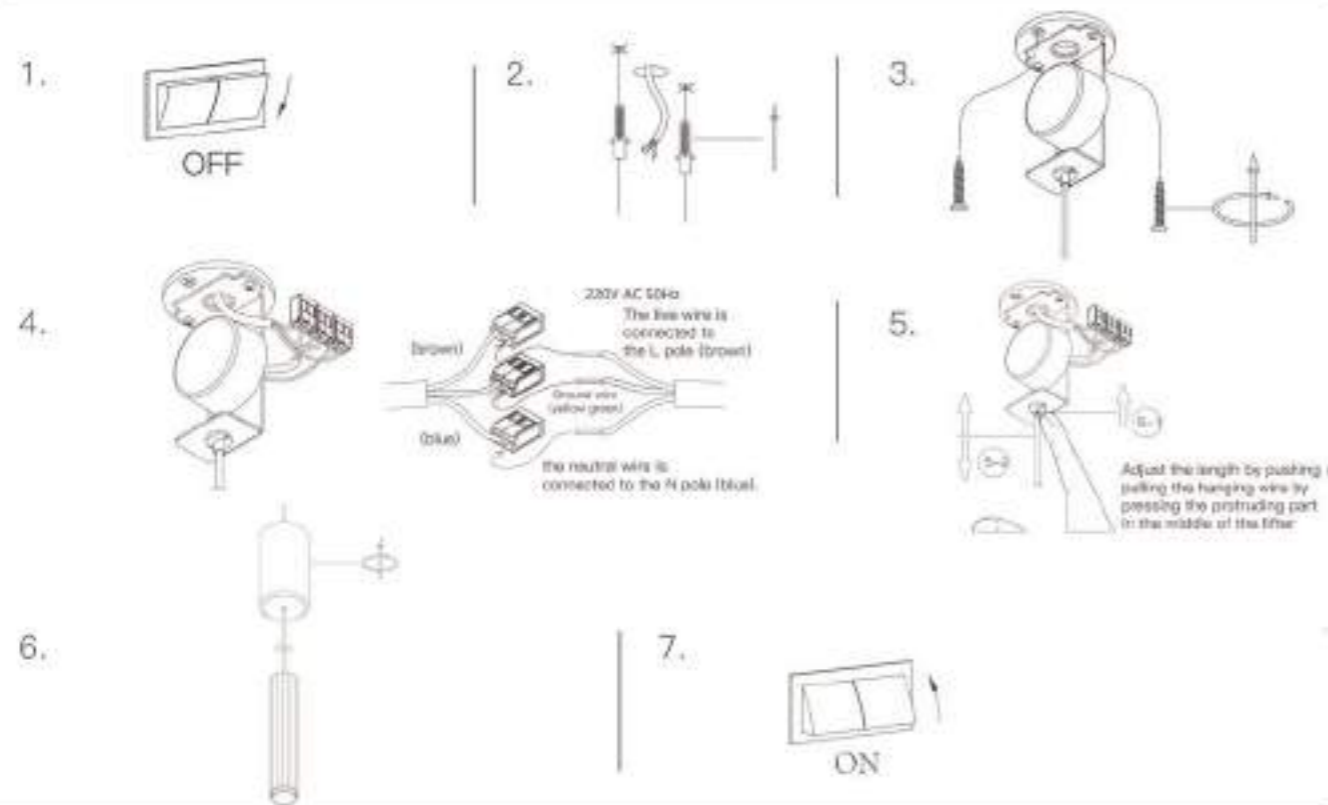


EXPLORE SERIES

Flashlight
chandelier



Characteristic



[Explore series] Flashlight chandelier, the unique appearance design pays tribute to the early days of the development of the lamp design. The necessary flashlight to go out is retro and modern industrial style with unique charm.



Rigart product Series it can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

DECORATE

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— FLASHLIGHT CHANDELIER



Narrow light



Wide light




Extremely wide light

LED / 5W

UNMATCHED LIGHT EFFECT PERFORMANCE

LIGHTING SCHEME

Feel the simple beauty of space

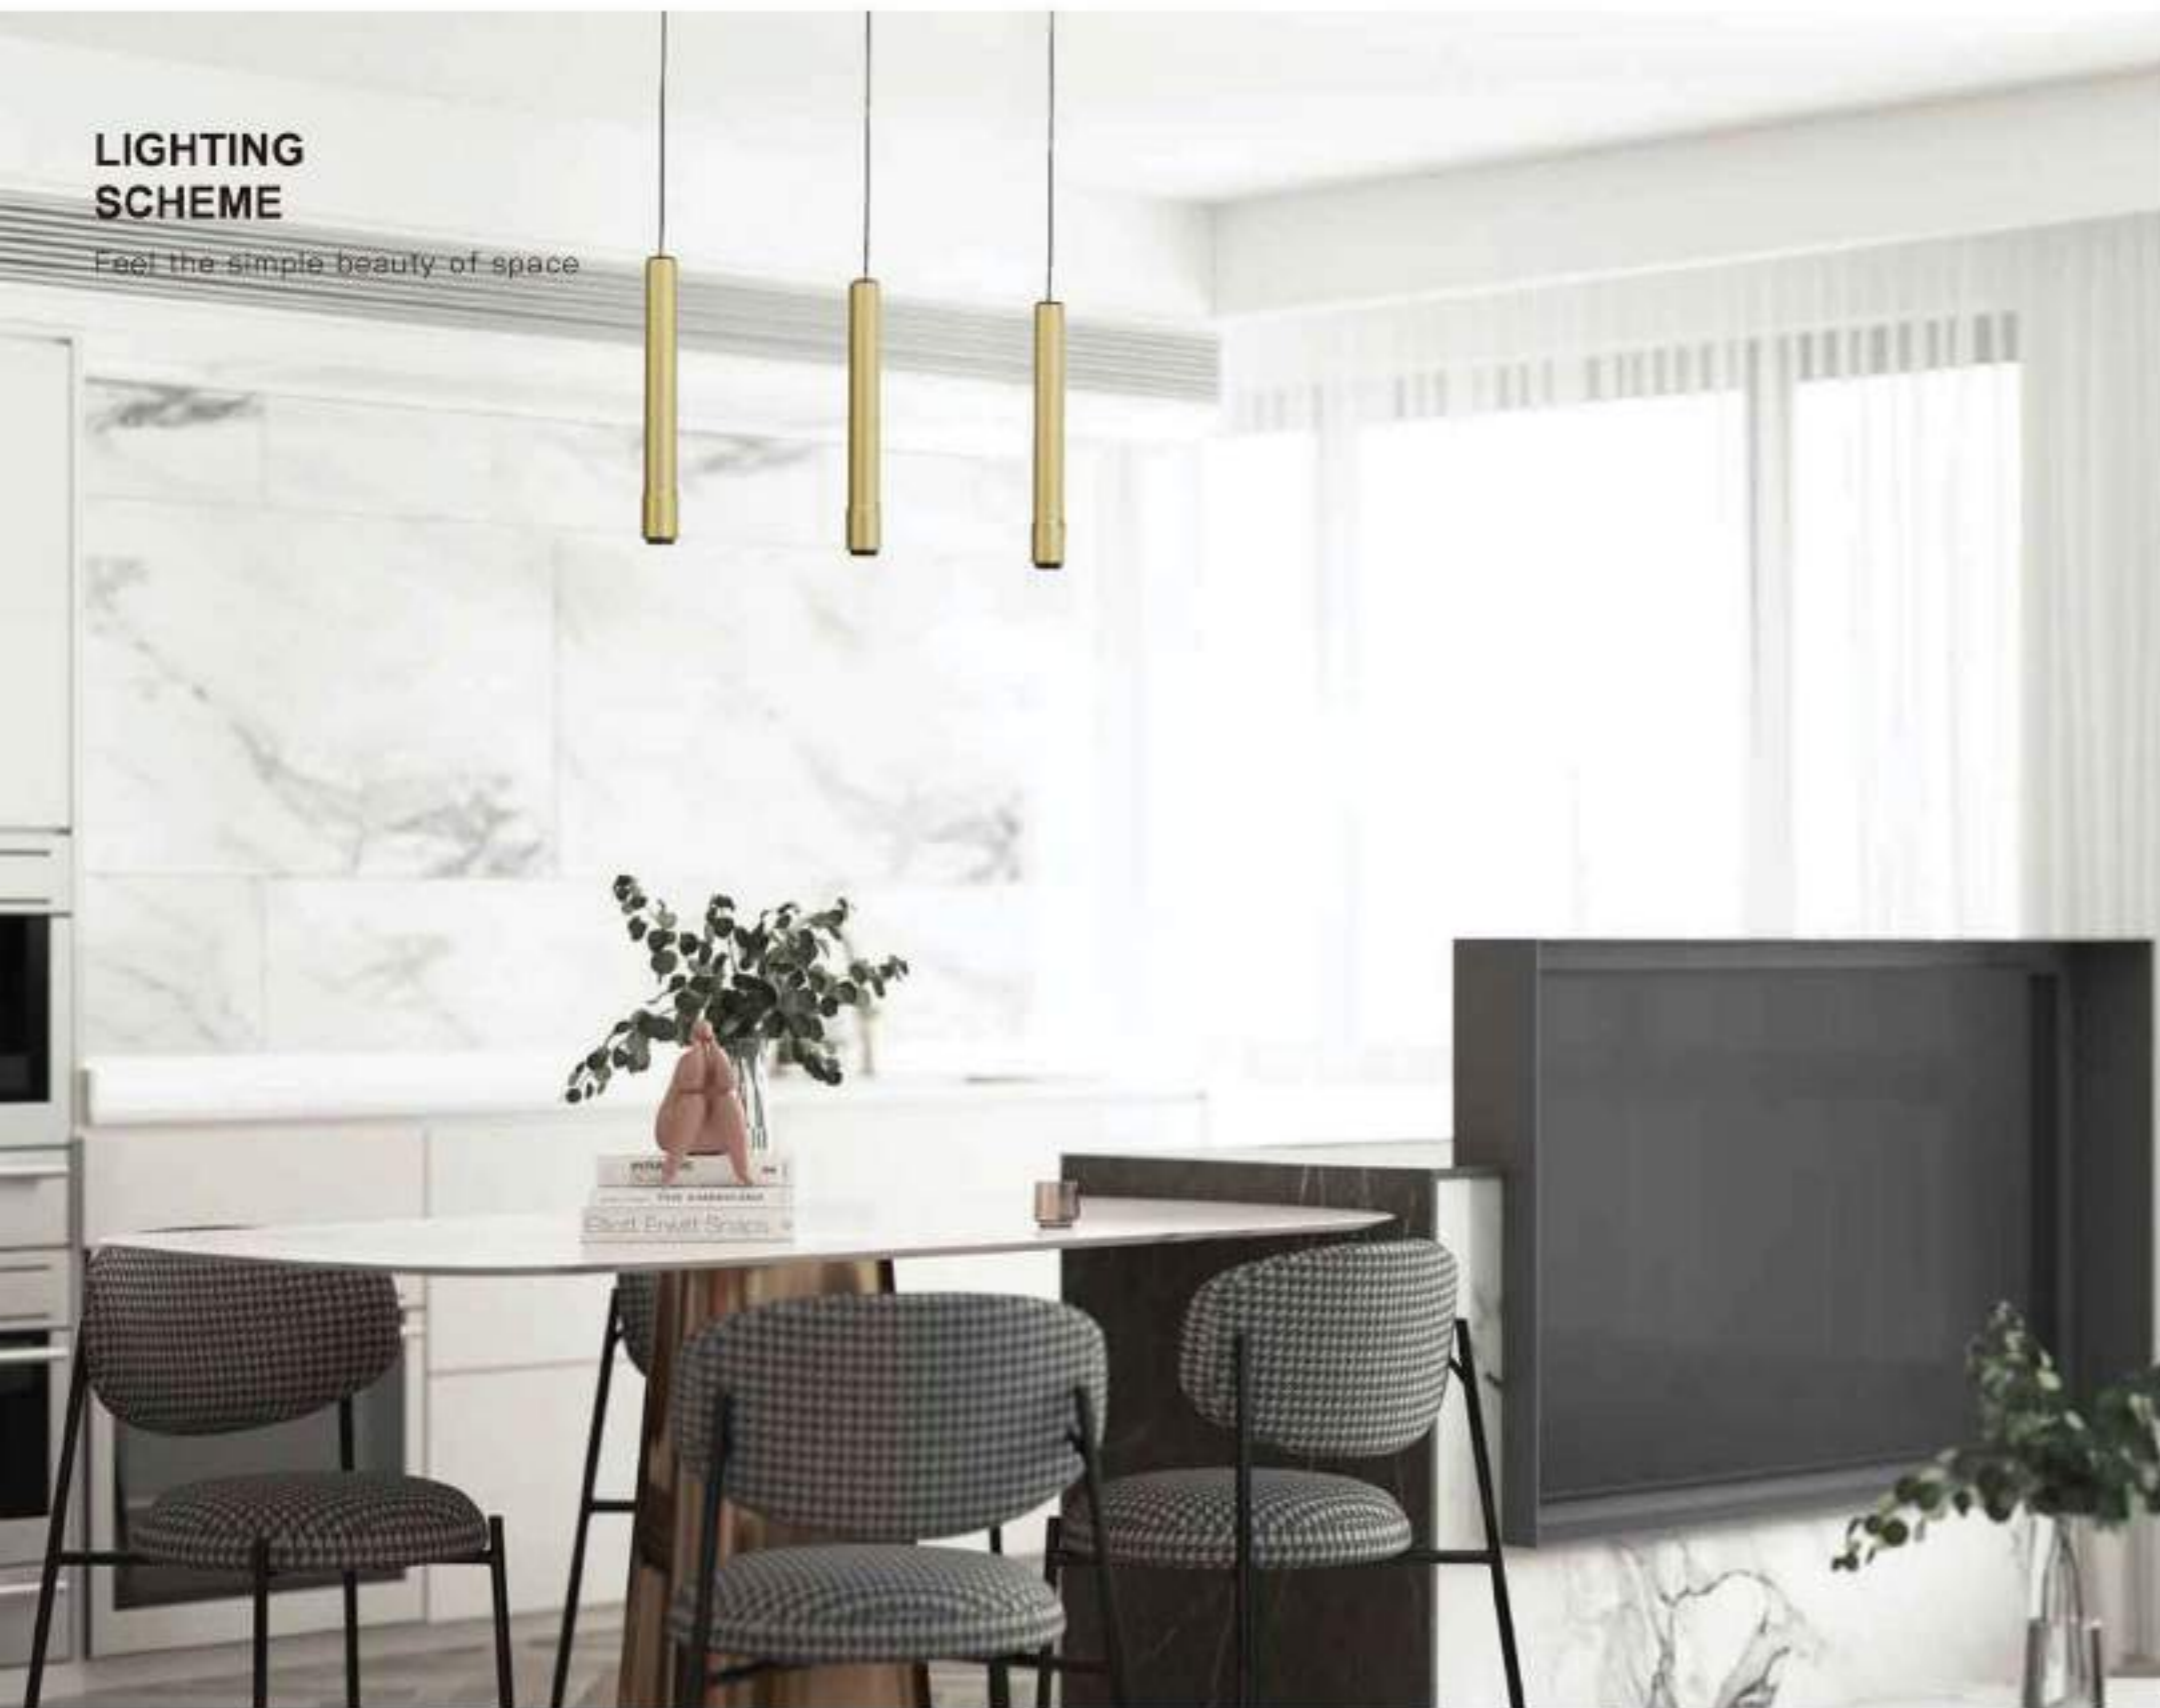

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Hotel club lighting design is the best way to show the style and taste of hotel clubs. Lighting must not only consider functionality, but also consider the integration of artistry and style. Rigart Light creates an exclusive artistic atmosphere for the hotel club.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing. Lighting is the soul to create the atmosphere of the home space. Rigart Light provides the best solution for home space.



In addition to representing the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illustrates exclusive lighting aesthetics for brand stores.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart created a reasonable, healthy and comfortable light environment for the office.



PRODUCT DESCRIPTION

Perceived light gives the world artistic charm.

EXPLORE
SERIES

DECORATE

DESIGN
INDUSTRIAL WIND
SIMPLE

CHARACTERISTIC





THE LIGHT IS SOFT AND NATURAL LIKE WATER SEEPING OUT

Unique flashlight-like design, retro and modern industrial style, can be used in LOFT style space.



Narrow light
distribution
15°



Neka-Hirohoku
matching light
24°



Wide light
distribution
36°

MAGIC MIRROR SERIES

Convex lens chandelier



Characteristic



[Magic mirror series] Convex lens chandelier, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

DECORATE

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— LARGE CONVEX LENS CHANDELIER



Luminous angle

LED / 12W

UNMATCHED LIGHT EFFECT PERFORMANCE



GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.




Wide light
distribution
90°

Comfortable

DESIGN

Exquisite and round design, perfect combination of aesthetics and engineering. Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

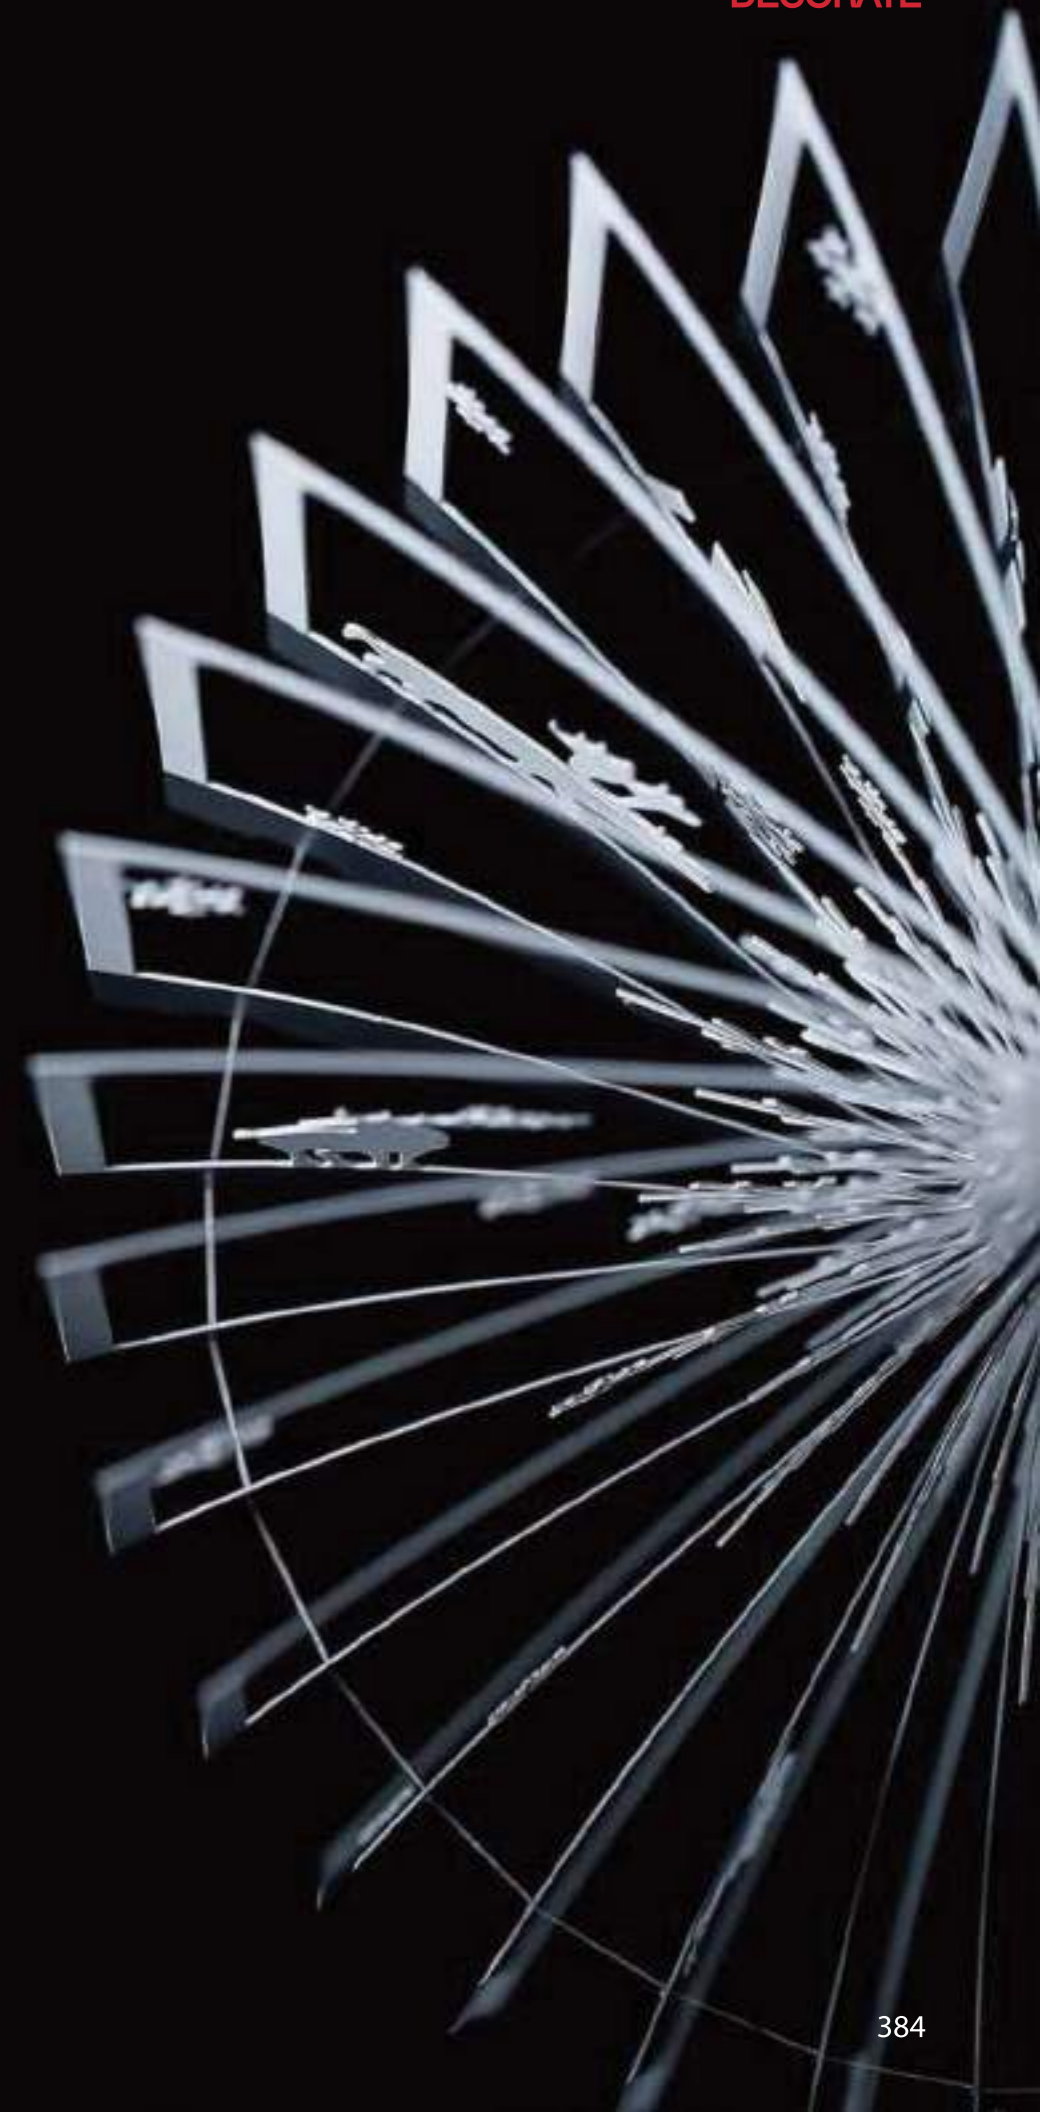

LIGHTING SCHEME

Feel the simple beauty of space



APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing. Lighting is the soul to create the atmosphere of the home space. Rigart Light provides the best solution for home spaces.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like nature light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



PRODUCT DESCRIPTION

Perceived light gives the world artistic charm



Perceive the artistic charm of the world

MAGIC MIRROR SERIES

The appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.



DECORATE

MAGIC MIRROR SERIES



DESIGN
SOFT
COMFORTABLE

CHARACTERISTIC



SPL0042-01B-012

Type	Installation Mode	Size	Finish	IP	Wattage	Luminous Flux	Beam Angle	CCT	CRI
Pendant Lamp	Surface Mount	Ø120x1200	Chrome	IP20	12W	860lm	90°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/ Brushed Gold/ Black Plating								



SPL0025-01A-018

Type	Installation Mode	Size	Finish	IP	Wattage	Luminous Flux	Beam Angle	CCT	CRI
Pendant Lamp	Surface Mount	Ø120x1200	Chrome	IP20	18W	860lm	90°	2700K 4000K 5000K	Ra≥90
Other Finish	Rose Gold/ Brushed Gold/ Black Plating								

MAGIC MIRROR SERIES

Convex lens spotlight



19

Characteristic



[Magic mirror series] Convex lens spotlight, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.




GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.




Wide light
distribution
90°

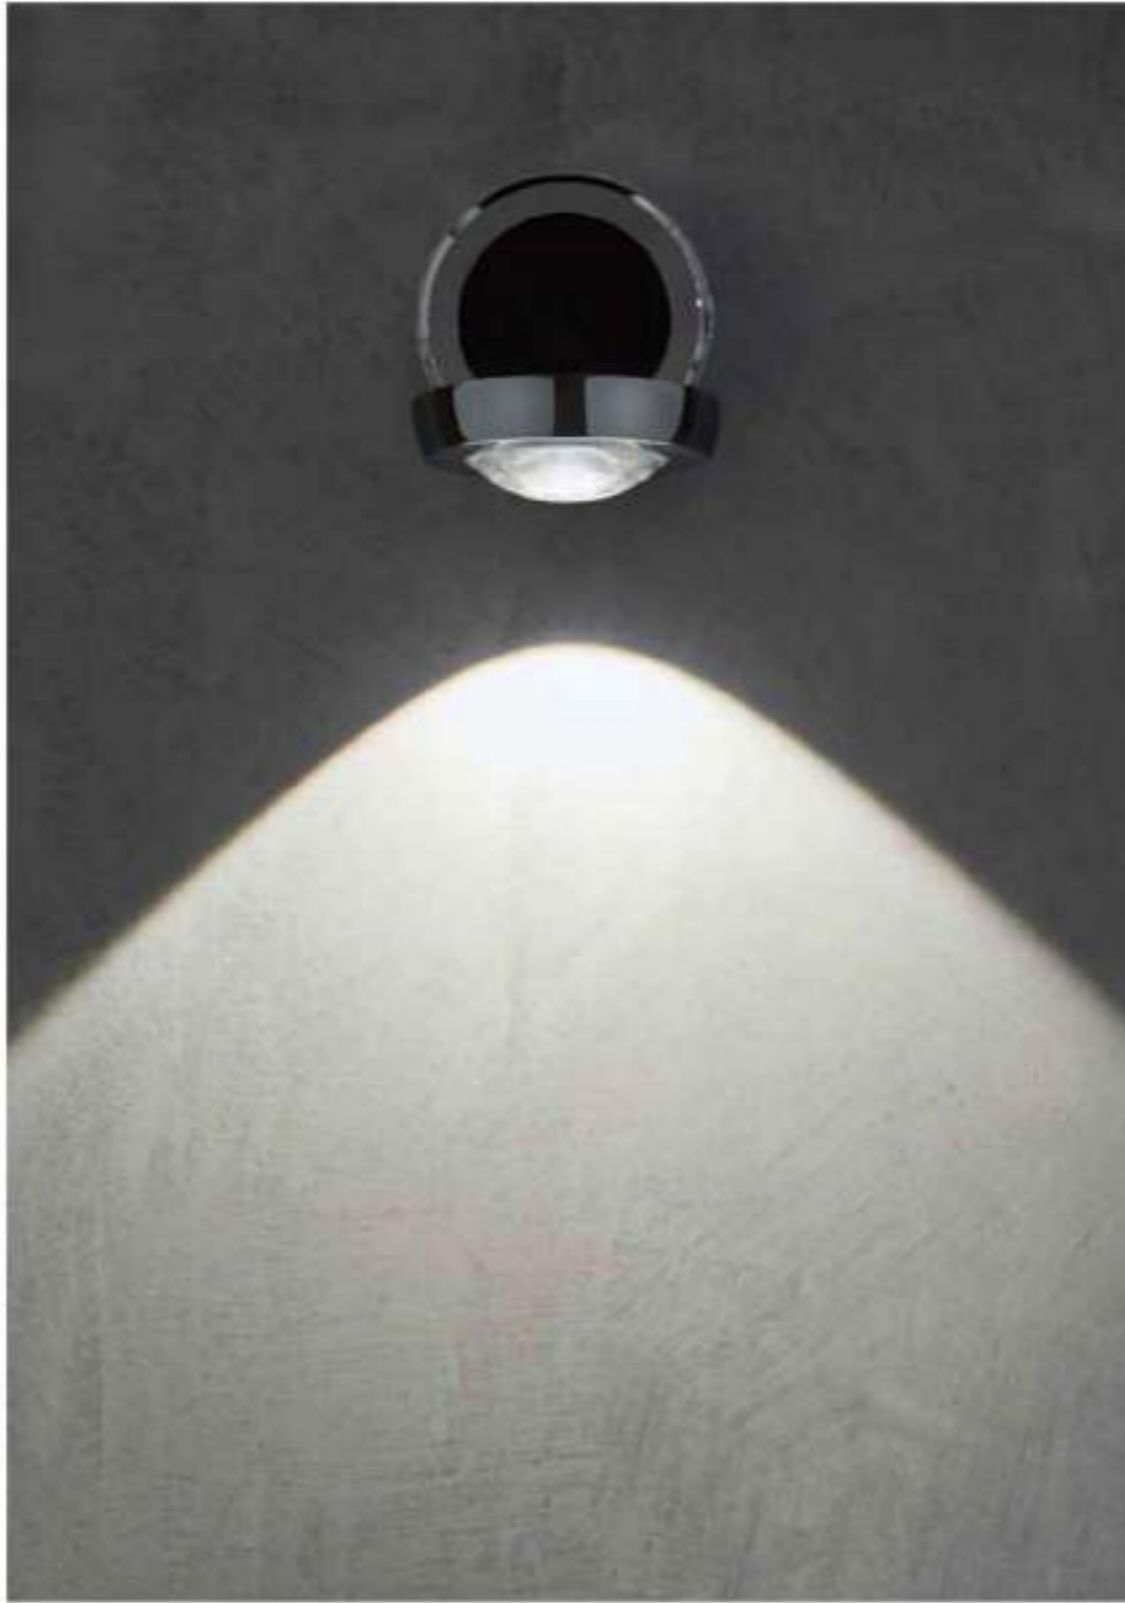

With the perfect combination of
craftsmanship and art,
create a museum-level space experience.

LIGHTING SCHEME

Feel the simple beauty of space

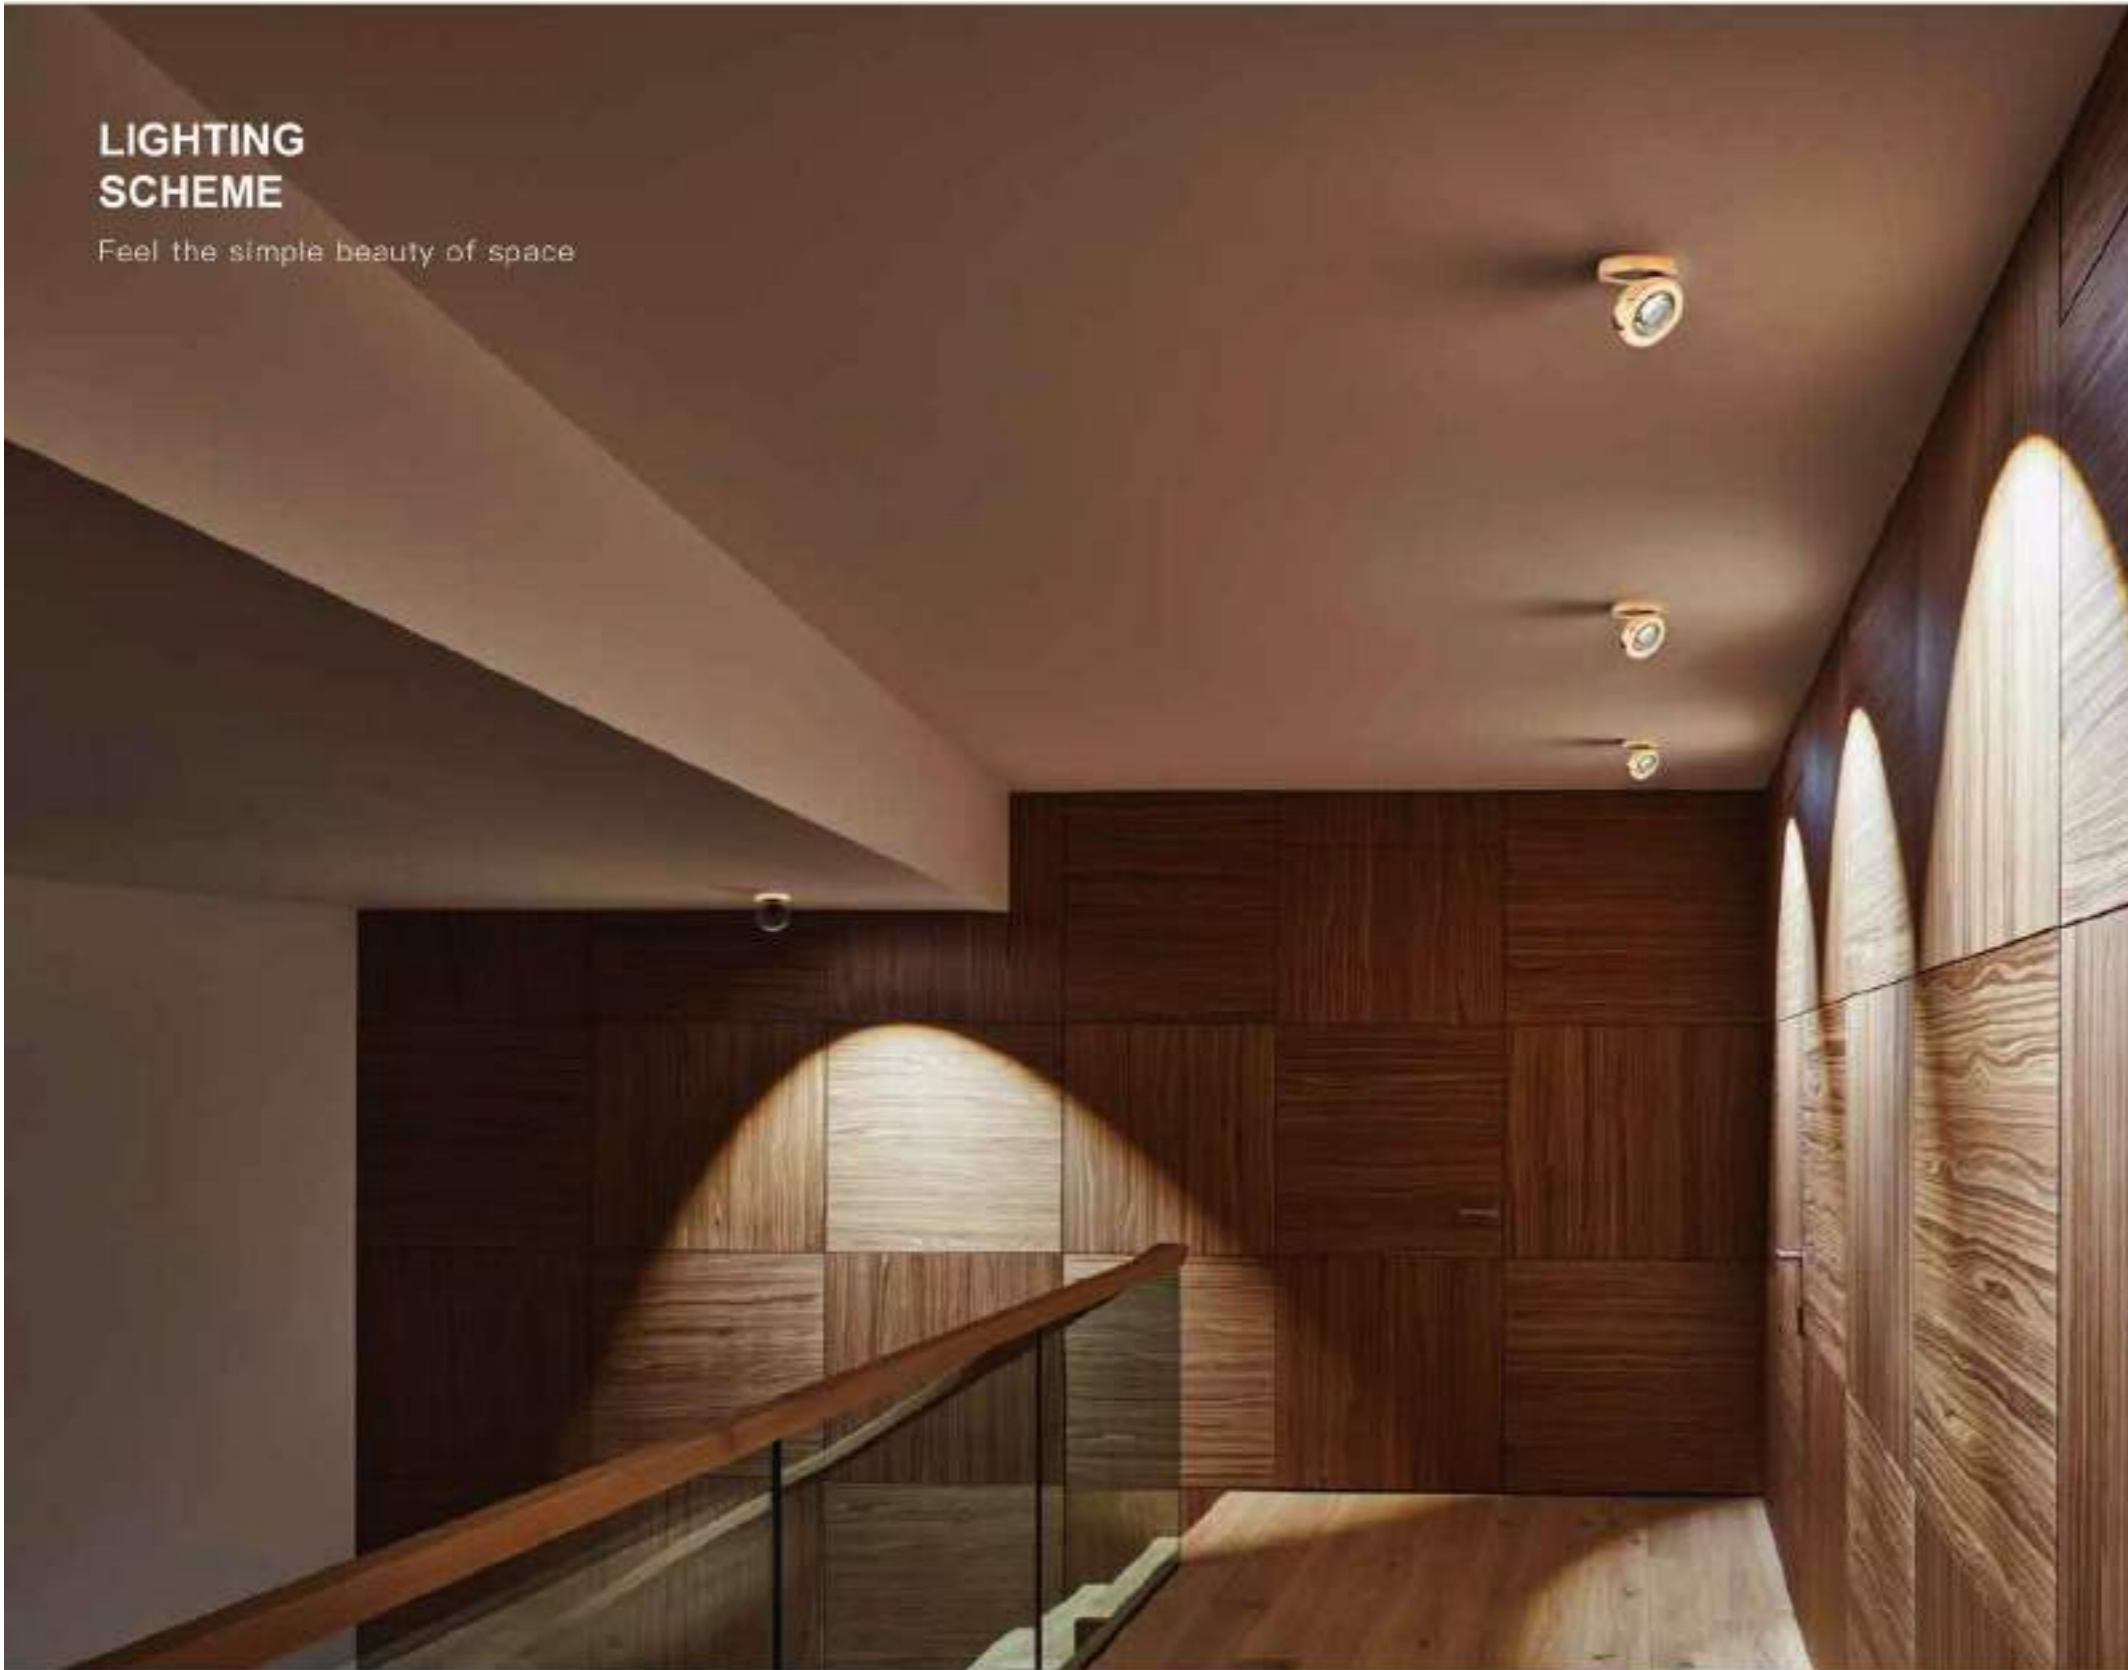

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Each piece of art is the crystallization of tempering thoughts. Under the light, its artistic beauty penetrates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting solutions for the art space.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing. Lighting is the soul to create the atmosphere of the home space. Rigart Light provides the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



PRODUCT DESCRIPTION

Perceived light gives the world artistic charm






SOFT ———
COMFORTABLE
————— DESIGN

More natural and soft light beam, let you indulge in the atmosphere full of artistic beauty.





Install

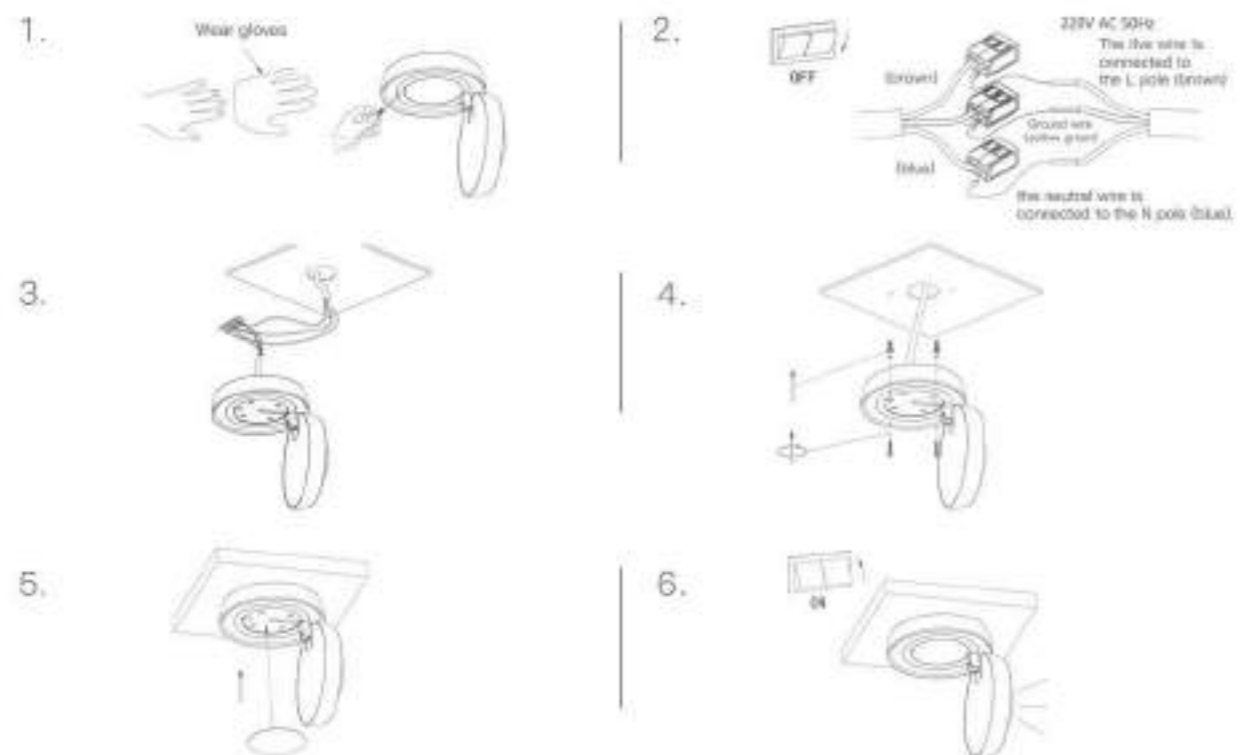

SCL0047-01A-008

Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Surface mounted (downlight)	Surface mount	Ø134*75.5	Rose Gold	IP20	8W	250Lm	30°	2700K 4000K 5000K	Ra>90
Other Finish:	Chrome/Sand white/Bright black								

MAGIC MIRROR SERIES

Recessed convex lens downlight



Characteristics



[Magic mirror series] Recessed convex lens downlight, the appearance design is inspired by the lens of the optical element. The light passing through the lens can change the direction and trajectory, imitating different artistic effects, becoming softer and warmer.

Rigart product Series it can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.



— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— RECESSED LARGE CONVEX LENS DOWNLIGHT



Luminous angle



UNMATCHED LIGHT EFFECT PERFORMANCE

GERMAN CRAFT OPTICAL LENS, PRECISE OPTICAL DESIGN

The lighting quality of the art gallery level, the perfect combination of craftsmanship and art, meets the highest demands of function and aesthetics.

With the perfect combination of craftsmanship and art, create a museum-level space experience.






Comfortable

DESIGN

Exquisite and round design, perfect combination of aesthetics and engineering. Ultra-high-quality surface treatment, 5 procedures, double-layer electroplating process, high-quality texture.

LIGHTING SCHEME

Feel the simple beauty of space

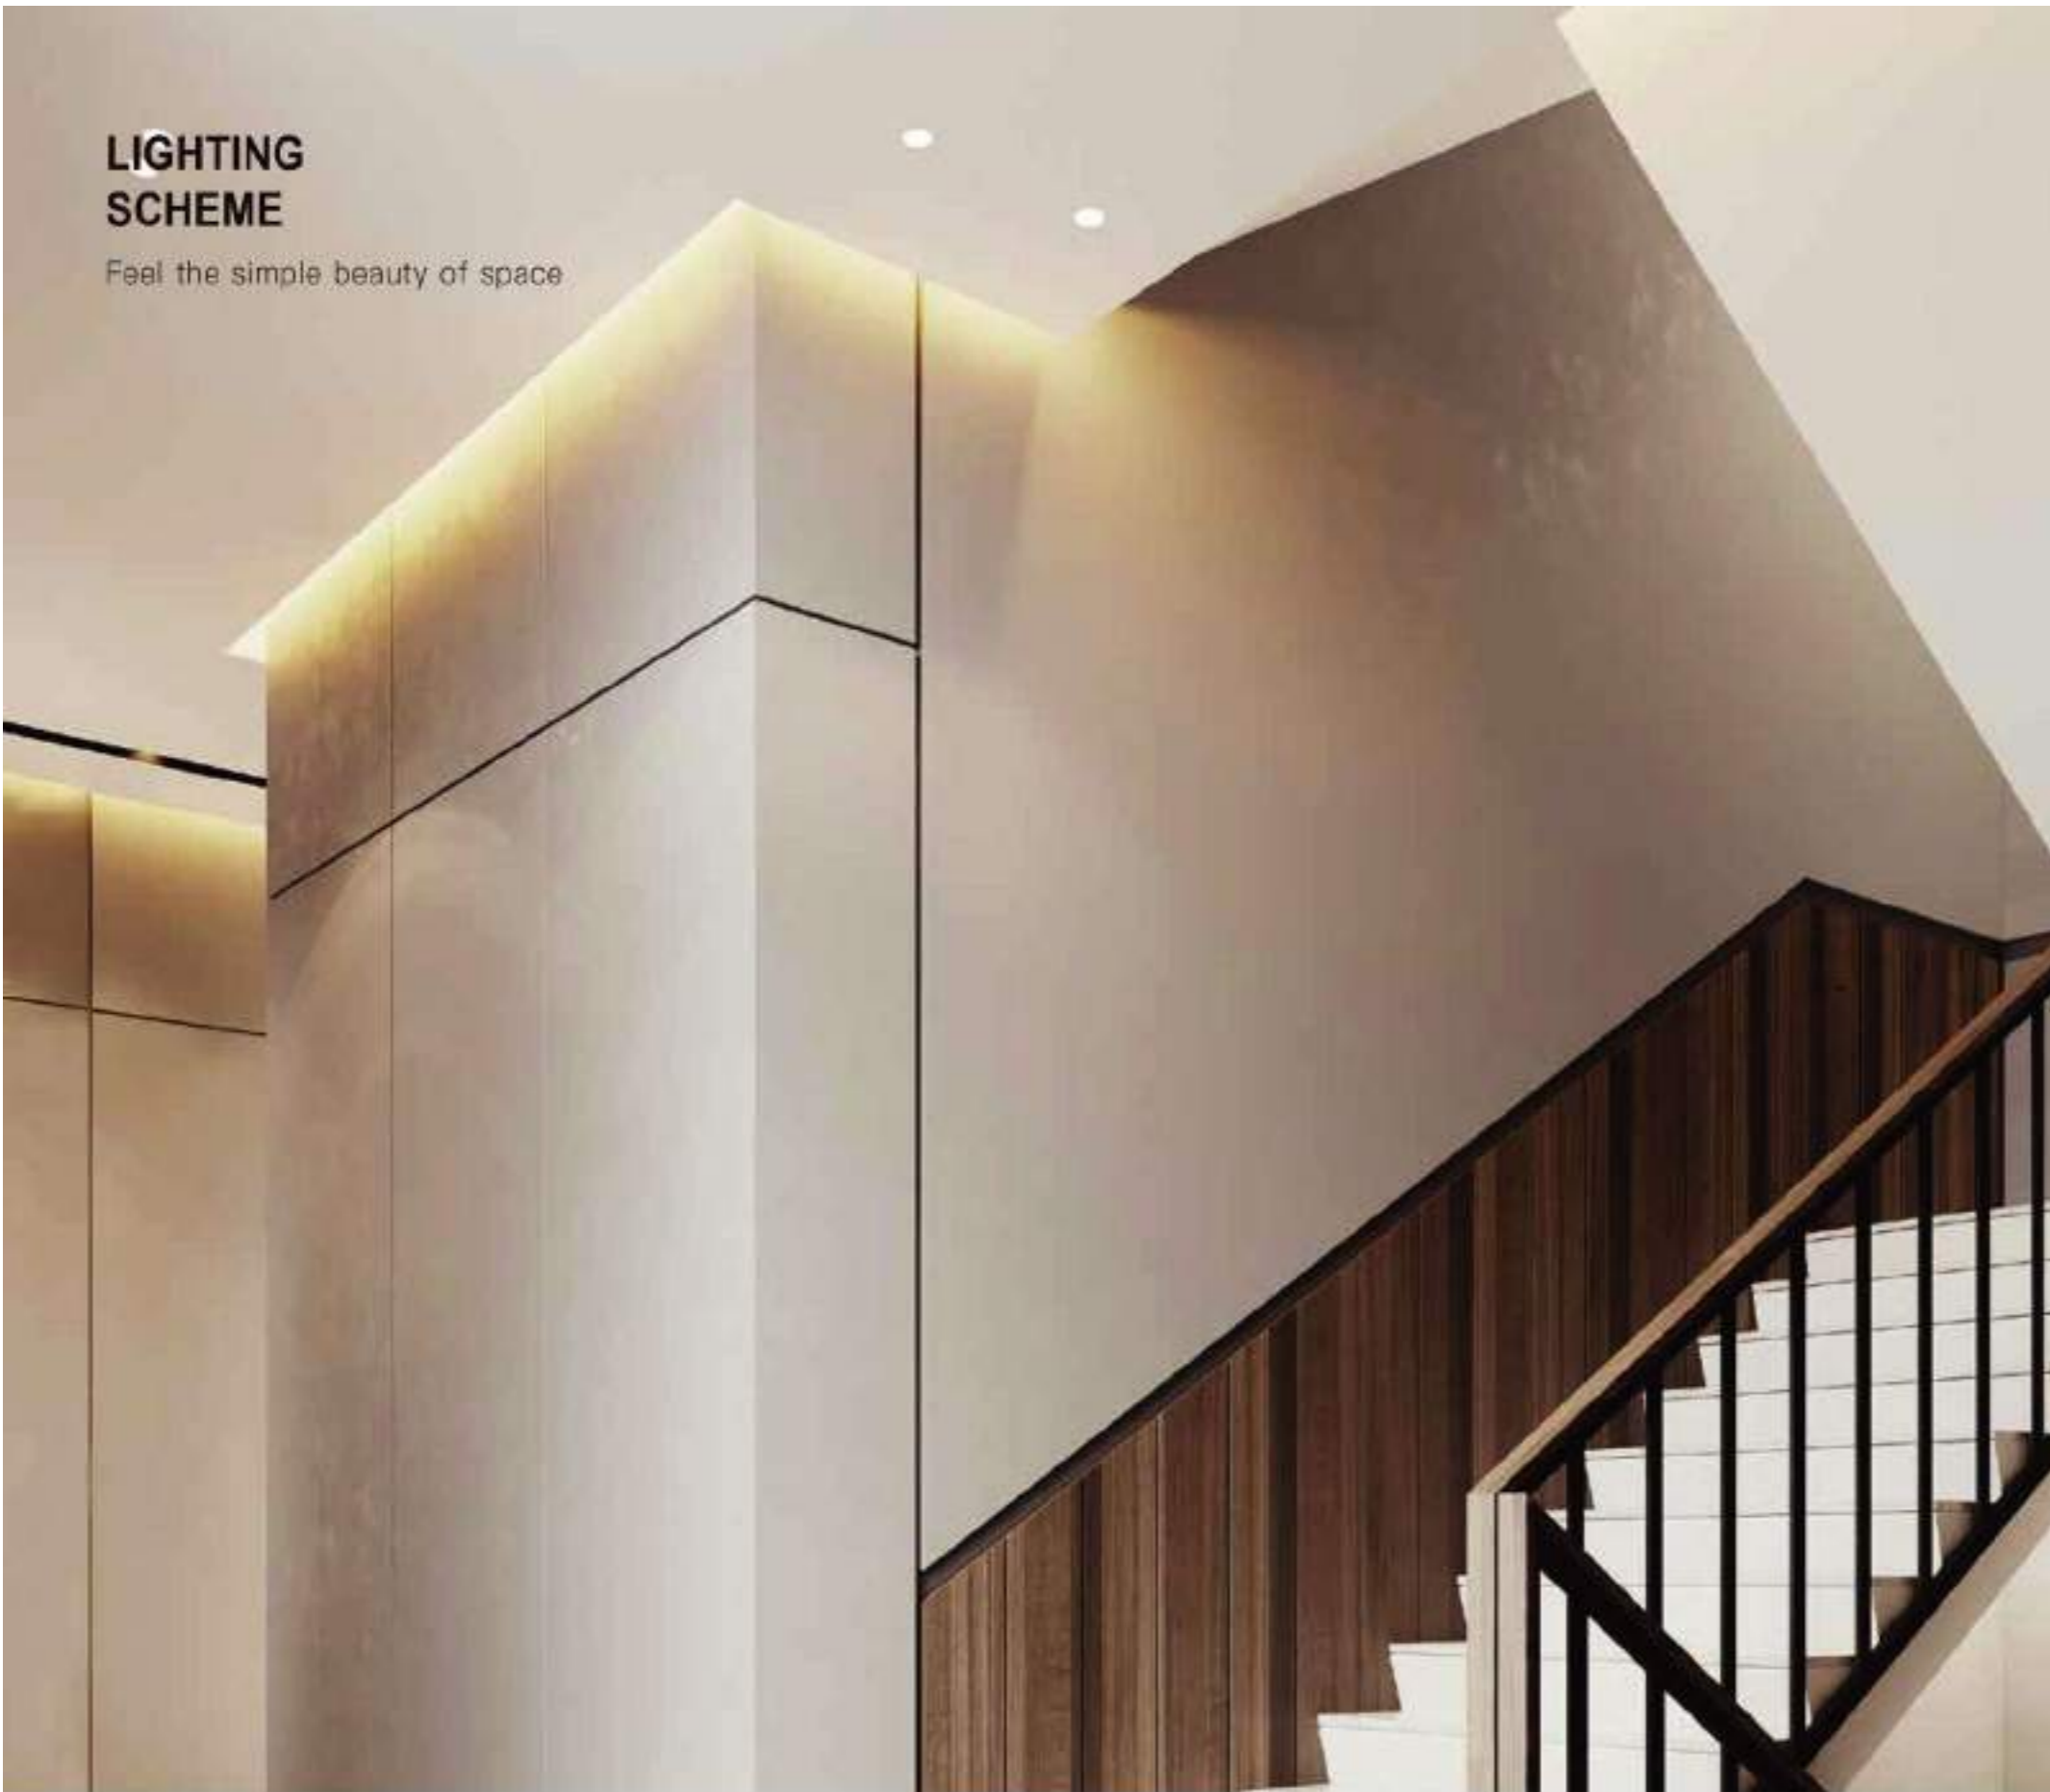

APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



Home is a warm and soft exclusive, giving people a sense of relaxation and comfort, lighting is the soul to create the atmosphere of the home space. Rigart Light provide the best solution for home space.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.



Each piece of art is the crystallization of towering thoughts. Under the light, its artistic beauty permeates the heart and soul, and instantly fills the space with inspiration. Rigart creates exclusive lighting aesthetics for the art space.

CHARACTERISTIC

**COMFORTABLE
SOFT
DESIGN**

MAGIC MIRROR



FORECAST SERIES

Recessed
spotlight



Characteristic



[Forecast series] Recessed spotlight, derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



■ Rigart product Series It can meet the solutions of different scenarios such as home space, art space, shopping mall, brand store, office space, restaurant bar, hotel club, etc.

— MORE UNIQUE DESIGN, LET YOU REVEL IN THE ATMOSPHERE FULL OF ARTISTIC BEAUTY.

— RECESSED SPOTLIGHT



LARGE SIZE



Narrow light Wide light Extremely wide light

SMALL SIZE & MEDIUM SIZE




Narrow light Wide light Extremely wide light

<u>SMALL SIZE</u>	LED / 7W
<u>MEDIUM SIZE</u>	LED / 10W
<u>LARGE SIZE</u>	LED / 20W

UNMATCHED LIGHT EFFECT PERFORMANCE




The lamp can be rotated 350 degrees horizontally and swung 90 degrees back and forth. The light is naturally soft and has a high degree of color reduction for the illuminated object.

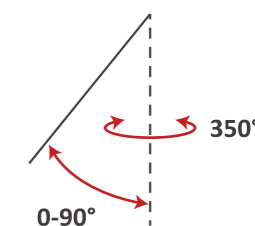

LONG- LASTING LIGHTING QUALITY

Light moves with your heart

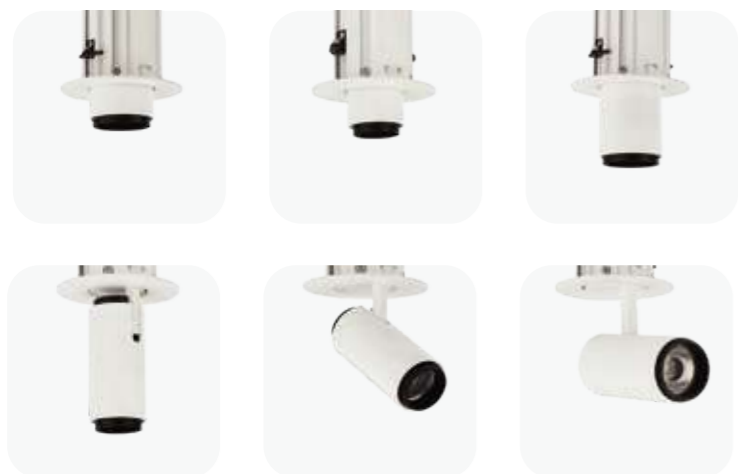

VISUAL COMFORT

More natural soft beam, more beautiful artistic atmosphere



Light effect is natural, comfortable, soft and even, let you indulge in the atmosphere full of artistic beauty

Commercial Lighting



2700K

Warm light is suitable for warm and quiet environments such as restaurants, hotels, cafes, and private clubs.



4000K

Neutral light is close to natural light, which is suitable for places such as living room and lobby that need warm white light.



5000K

Cold white light is like the bright sun at noon, which has high lumen and color rendering, and has a wide range of applications.


610lm
/
2590 lm

—
Reference neutral white model

610lm
2590lm/Model


Provide a wide range of luminous power levels and beam angles, making it suitable for uniform lighting design of facades of different heights

610lm




7W

1430lm



10W

2590lm



20W

The value of the flux and power of the beam is rated.

LIGHTING SCHEME

Feel the simple beauty of space



APPLICATIONS

The Rigart product series can meet the solutions of different scenarios such as home spaces, art spaces, shopping malls, brand stores, office spaces, restaurants, bars, and hotel clubs.



The lighting design of the dining bar plays a vital role in the atmosphere of the entire space, and directly affects the effect of consumers and the feeling of customer experience. Rigart Light creates an exclusive artistic atmosphere for the dining bar.



Home is a warm and soft exclusive, giving people a sense of relaxation and soothing, lighting is the soul to create the atmosphere of the home space, Rigart Light provides the best solution for home space.



In addition to highlighting the characteristics of the brand, the lighting can also reflect the best visual effects of the display, expressing the characteristics of the product, allowing consumers to stop and have a good impression on the store. Rigart illuminates exclusive lighting aesthetics for brand stores.



The ideal office lighting environment should be healthy and comfortable, just like natural light, bright and not dazzling, mild and not hot. Rigart tailored a reasonable, healthy and comfortable light environment for the office.

PRODUCT DESCRIPTION

Perceived light gives the world artistic charm



Perceive the artistic charm of the world

Derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



The lamp can be rotated 350 degrees horizontally and swung 91 degrees back and forth. The light is naturally soft and has a high degree of color reduction for the illuminated object.

The well-designed lamp body structure is convenient for assembly production and installation. There are no exposed screws or fixing parts on the outer surface, which is more simple and beautiful.

The luminaire adopts a modular design, which can be used with different components to convert between surface-mounted and flush-mounted structures to meet different installation requirements.



SPACE

F O R E C A S T



■

Derived from the design concept of less is more, simple geometric shape, pure white appearance, with bright chrome front ring, outlines modern and light luxury tones, in order to echo the modern high-quality life with simplicity and mood.



CHARACTERISTIC



FORECAST SERIES



┌
**MINIMALIST
FREEDOM
SMART**

CHARACTERISTIC

Install

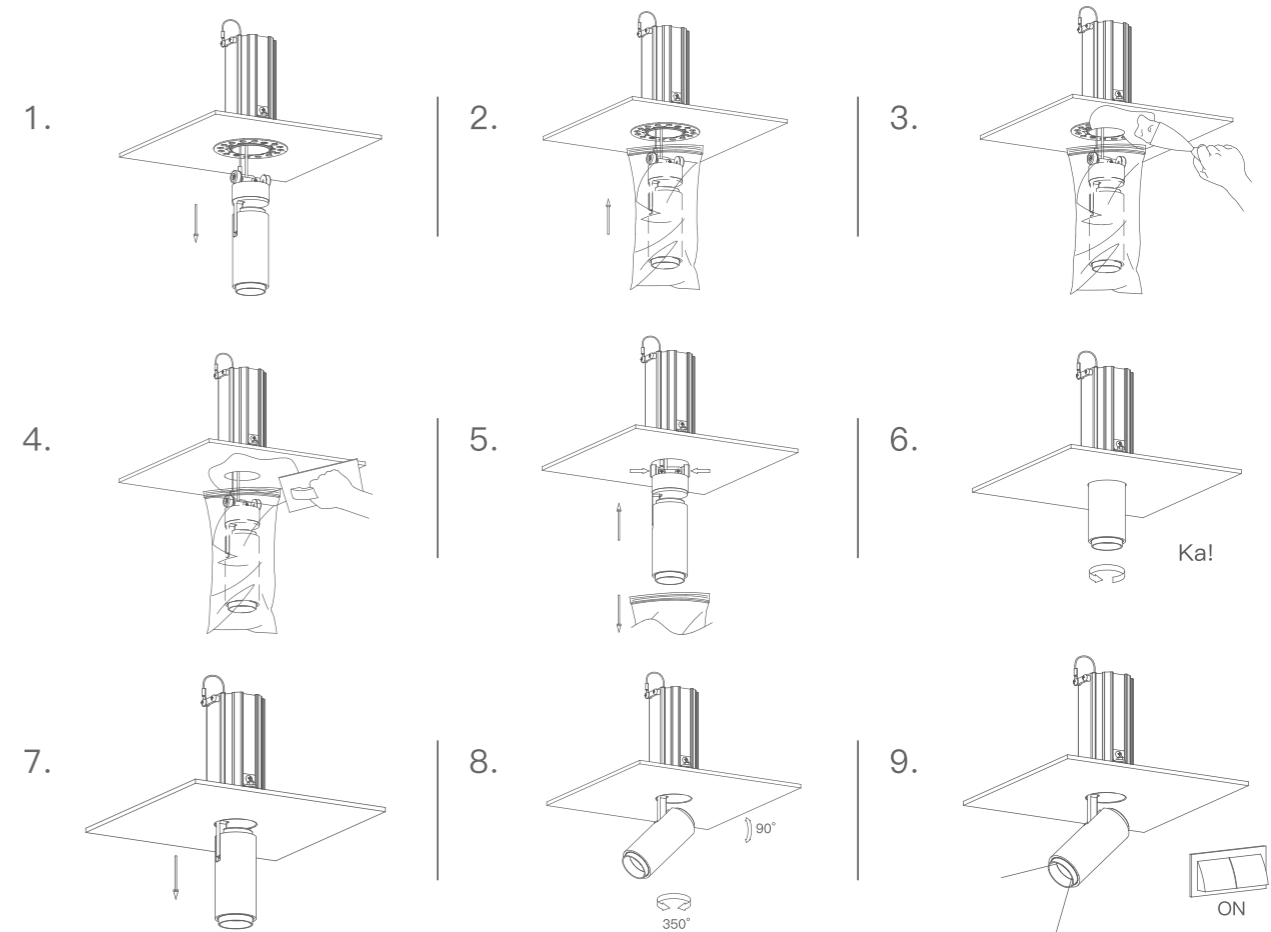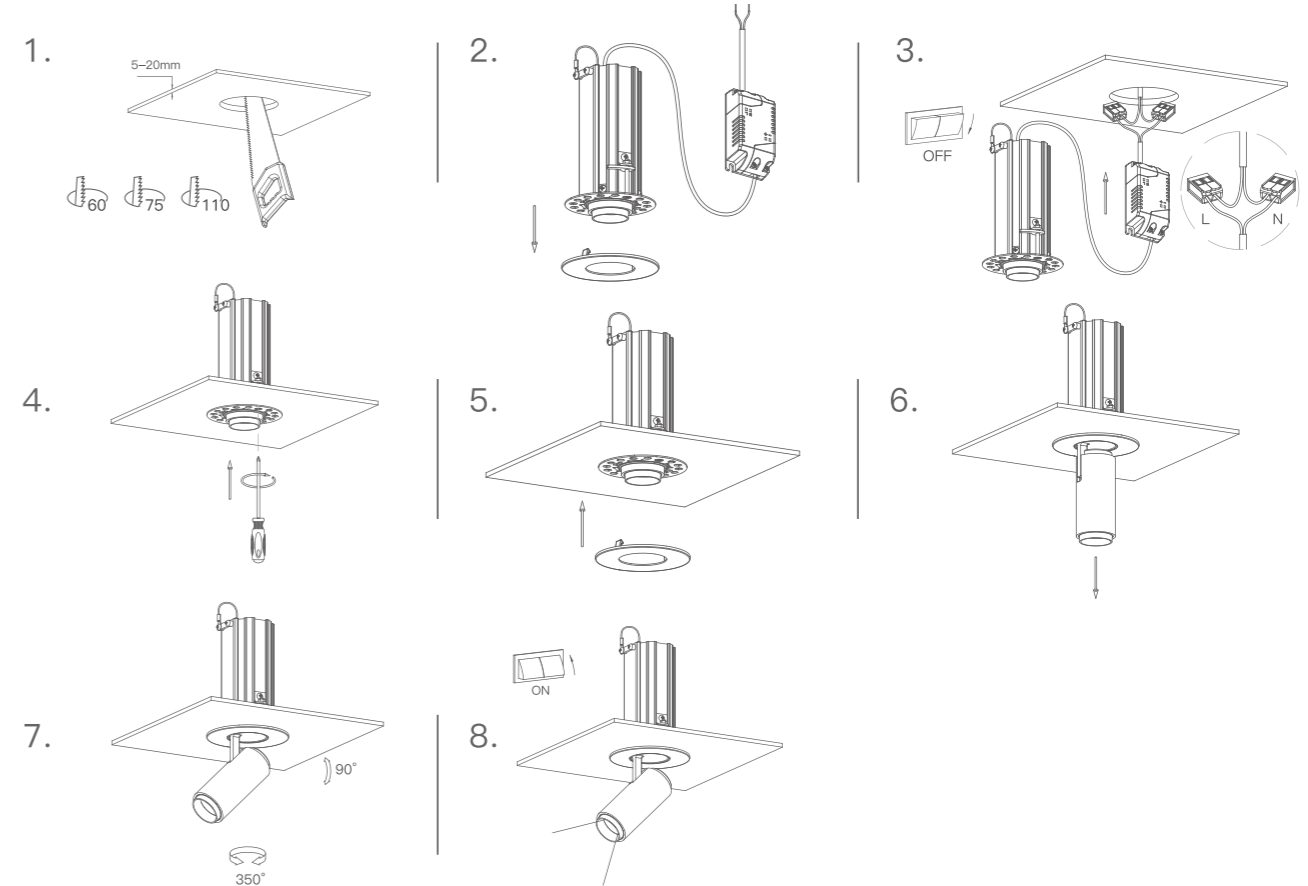

SDL0030-01A-007



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ75*122 Lamp bodyΦ35	Matte white	IP20	7W	610Lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	Matte Black								Cut out(mm) 60

SDL0030-01B-010



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ95*122 Lamp bodyΦ50	Matte white	IP20	10W	1430Lm	15°/24°/36°	2700K 4000K 5000K	Ra>90
Other Finish	Matte Black								Cut out(mm) 75

SDL0031-01A-020



Type	Installation Mode	Size	Finish	IP	Wattage	Luminous flux	Beam Angle	CCT	CRI
Retractable spotlight	Recessed	Φ140*152 Lamp bodyΦ80	Matte white	IP20	20W	2590Lm	15°/24°/38°	2700K 4000K 5000K	Ra>90
Other Finish	Matte Black								Cut out(mm) 110


OUTDOOR



London Eye & Country Hall, London, England, United Kingdom
Photo credits: Ali Khademolesseini



Model:	FL65-1.5SL	FL65-03SL
Power:	1,5W	3W
Beam angle:	15°/ 28°	
Dimensions:		

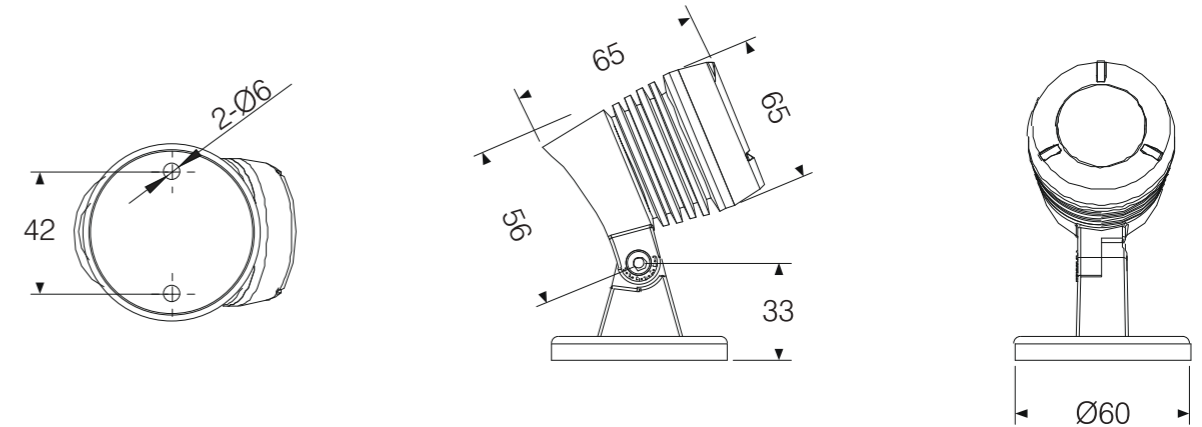


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB, RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C

FLOOD LIGHT



Model:	FL7003-3SL	FL7006-3SL
Power:	3W	6W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°/ 15°x30°/ 10°x60°	
Dimensions:		

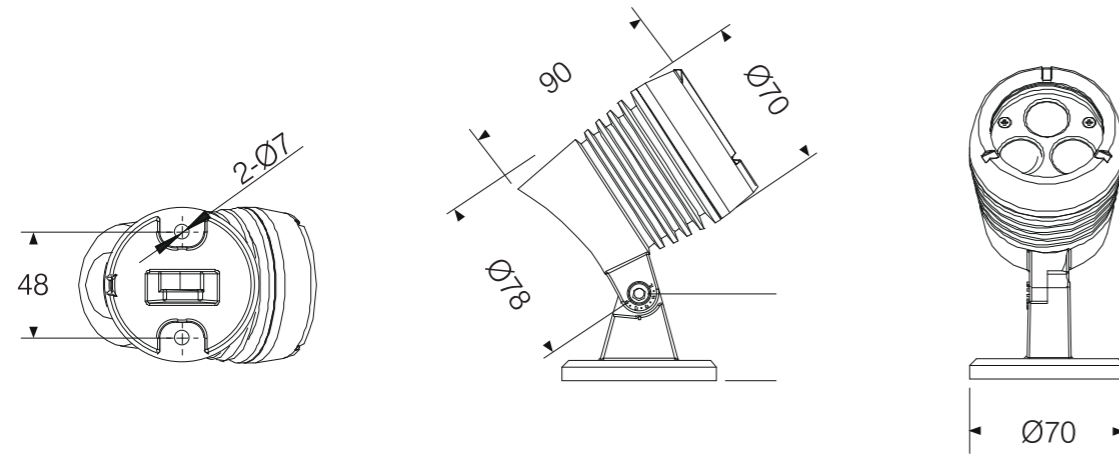


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Honeycomb

FLOOD LIGHT



Model:	FL9507-6SL	FL9512-6SL	FL9516-7SL
Power:	7W	12W	16W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°/ 15°x30°/ 10°x60°		
Dimensions:			

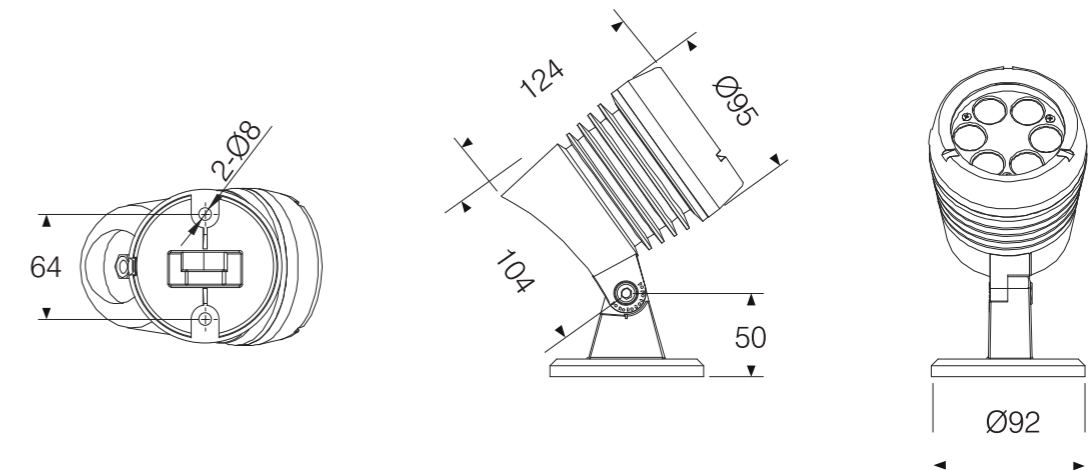


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Honeycomb

FLOOD LIGHT



Model:	FL9003-05RL	FL9012-05RL
Power:	3W	12W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°	
Dimensions:		

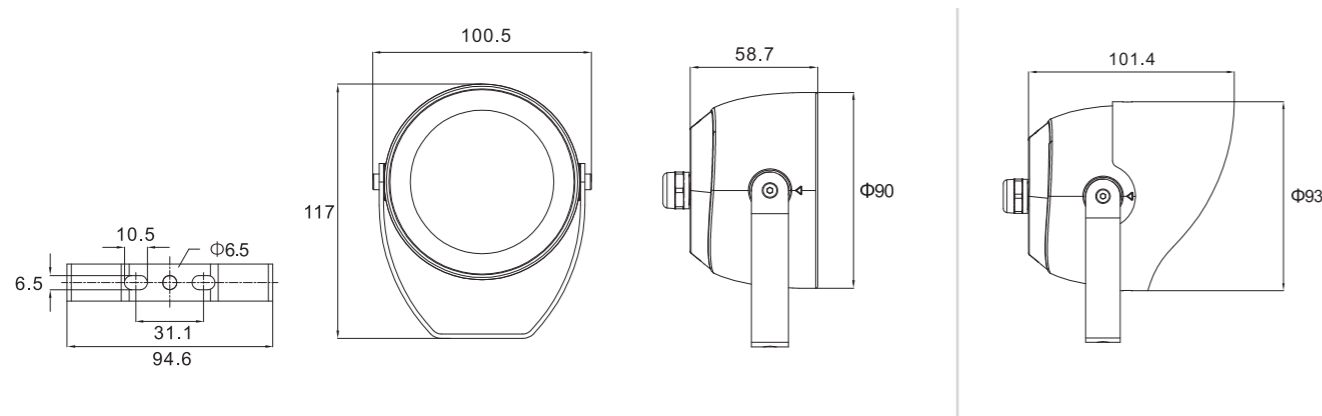


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-40°C~ +50°C

FLOOD LIGHT



Model:	FL9010R-01RL
Power:	10W
Beam angle:	15°/ 22°/ 36°
Dimensions:	

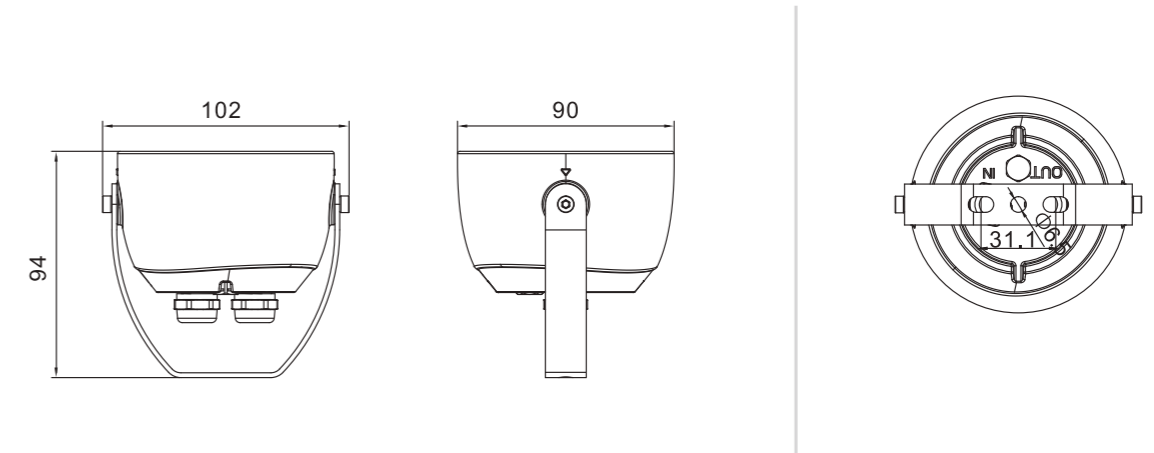


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC48V
Operating temperature:	-40°C~ +45°C

FLOOD LIGHT



Model:	FL14018-12RL	FL14024-18RL
Power:	12W	18W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°	
Dimensions:		

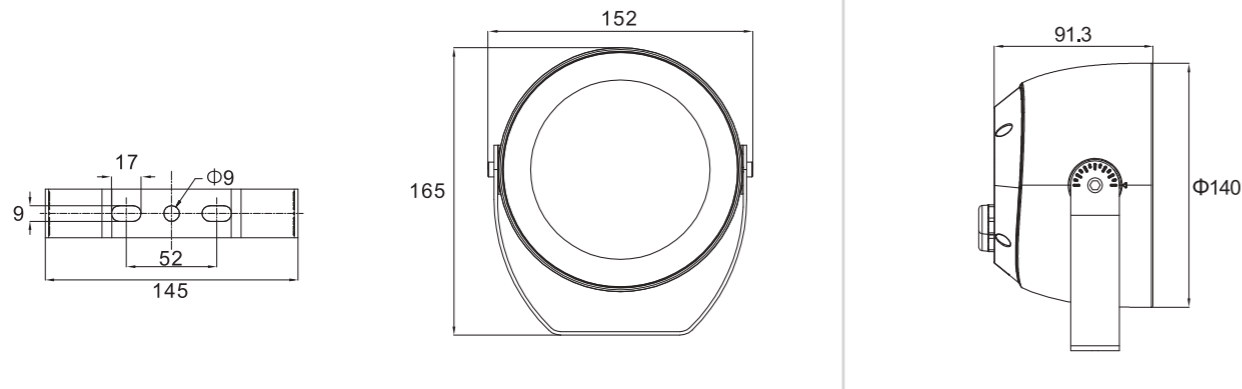


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Honeycomb

FLOOD LIGHT




Model:	FL14020R-01RL
Power:	20W
Beam angle:	15°/ 22°/ 36°
Dimensions:	

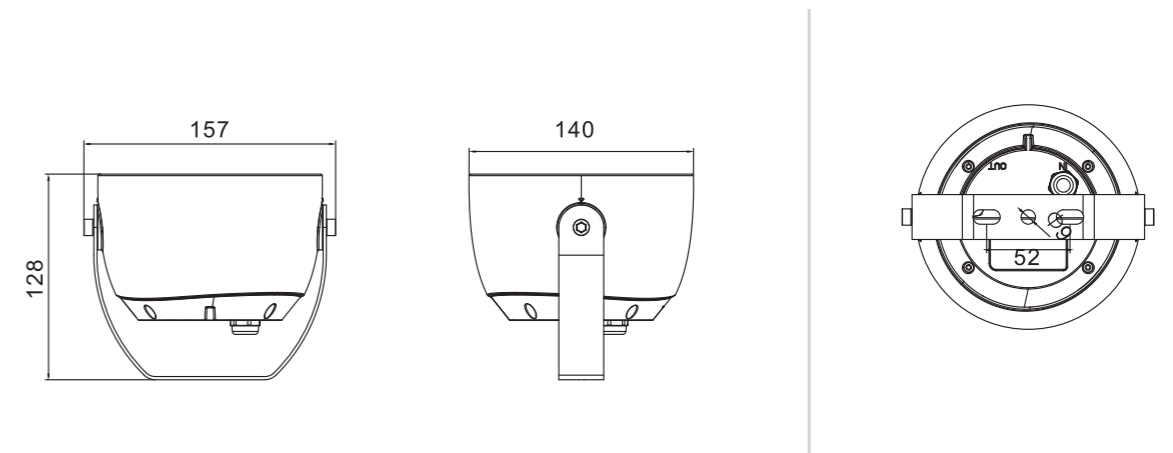

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ Bicolor
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC48V
Operating temperature:	-40°C~+45°C

FLOOD LIGHT

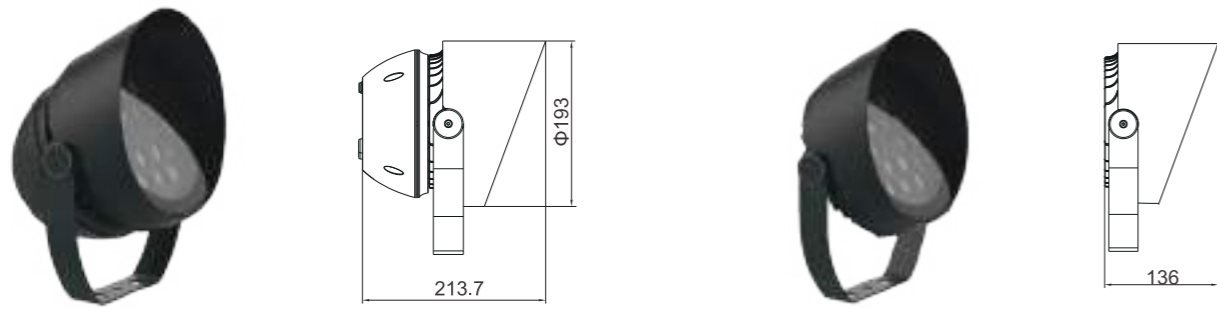

Model:	FL19024-09RL	FL19036-18RL	FL19048-18RL
Power:	24W	36W	48W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°		

Dimensions:

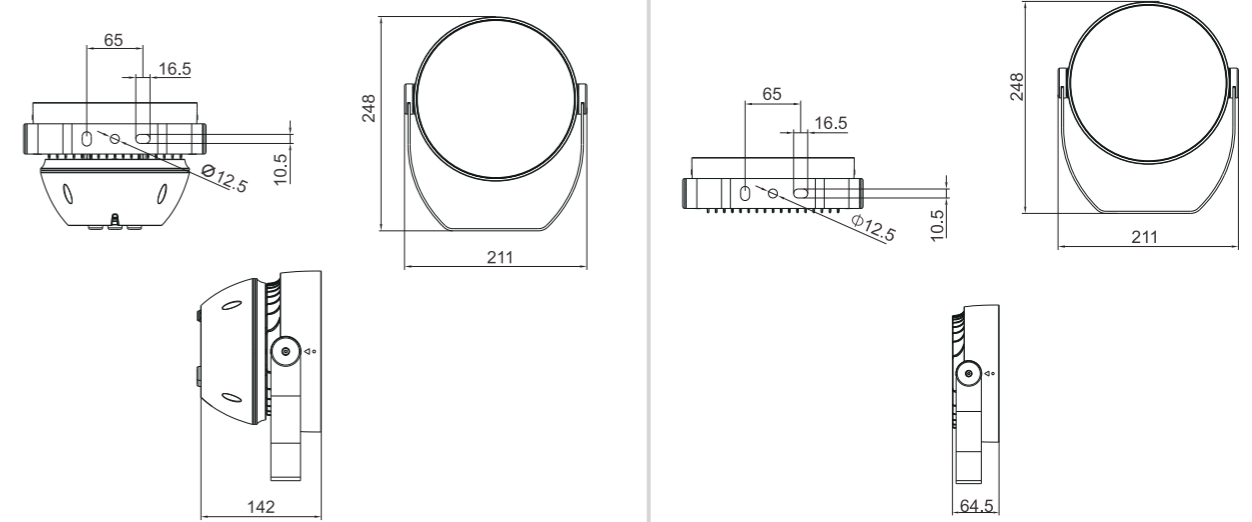


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-40°C~ +50°C
Accessory	Honeycomb

FLOOD LIGHT



Model:	FL22048-30RL	FL22060-30RL	FL22072-30RL
Power:	48W	60W	72W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°		
Dimensions:			

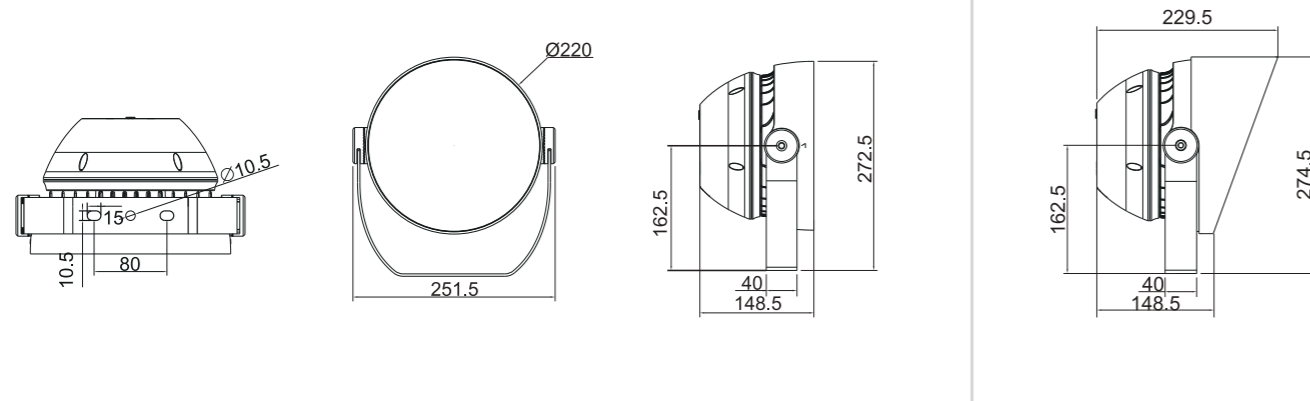


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V
Operating temperature:	-40°C~ +50°C

FLOOD LIGHT



Model:	FL26060-24RL	FL26064-24RL	FL260100-48RL	FL260120-48RL
Power:	60W	64W	100W	120W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x64°			
Dimensions:				

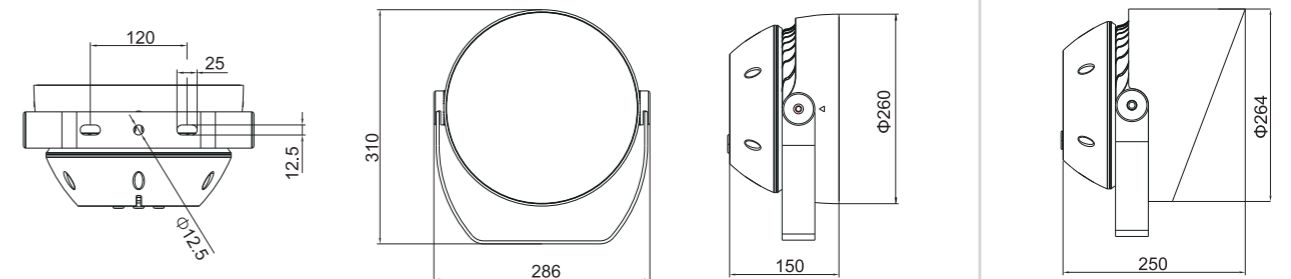

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V
Operating temperature:	-40°C~ +50°C



FLOOD LIGHT



Model:	FL35090-36RL	FL350150-72RL	FL350180-72RL
Power:	90W	150W	180W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°		
Dimensions:			

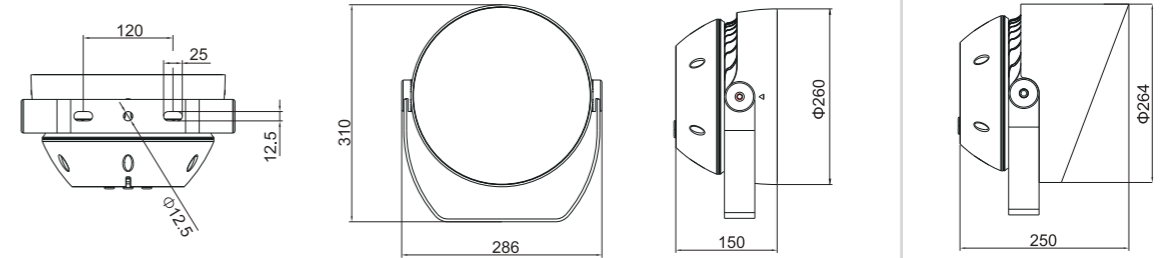

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V
Operating temperature:	-40°C~+50°C

FLOOD LIGHT




Model:	FL13012-03AL	FL13012-06AL	FL13015-01AL	FL13018-06AL
Power:	3x4W	6x2W	15W	6x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:

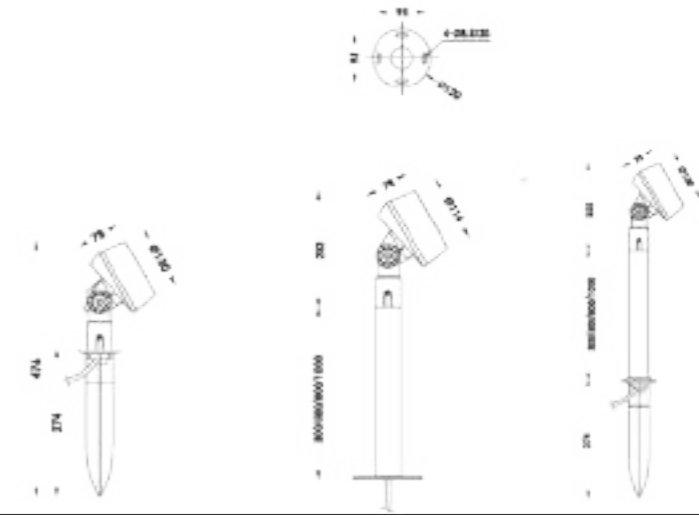

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+40°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

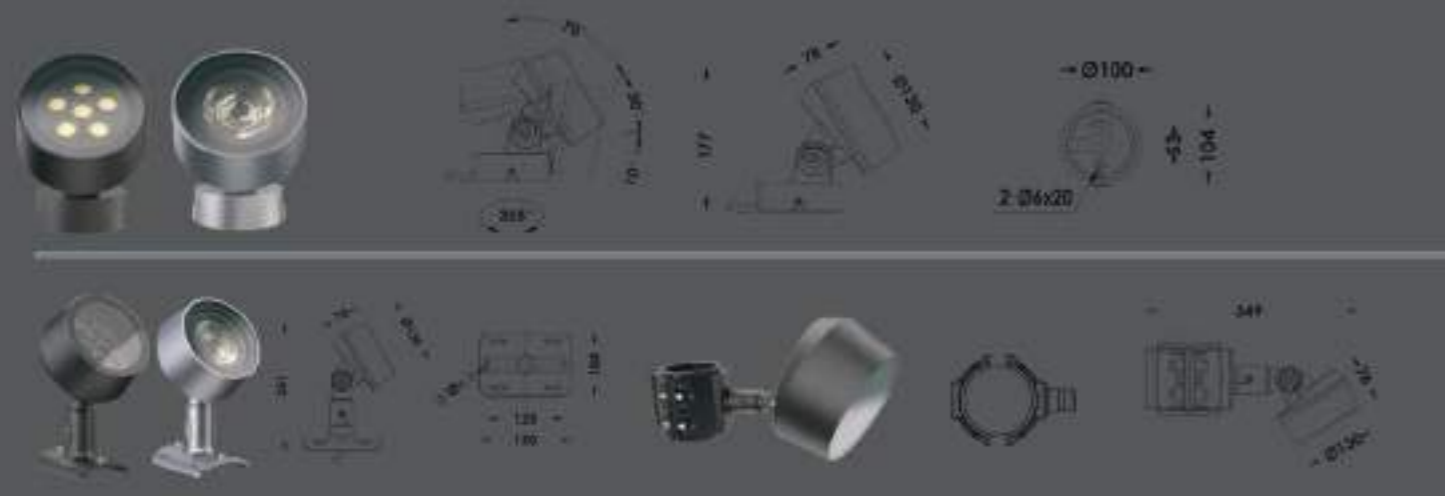

FLOOD LIGHT



Model:	FL17024-06AL	FL17024-12AL	FL17024-01AL	FL17036-12AL
Power:	6x4W	12x2W	24W	12x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°
Dimensions:				

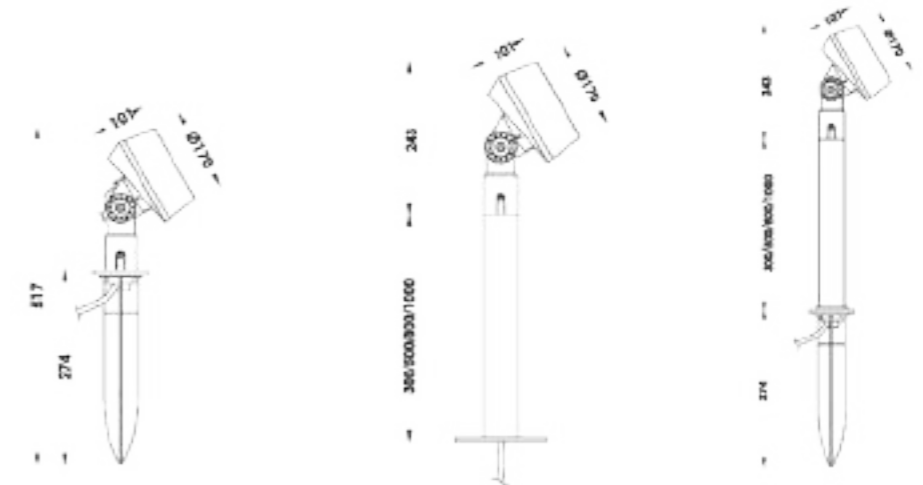

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+40°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



FLOOD LIGHT







Model:	FL26072-18AL	FL26061-36AL	FL26060-04AL	FL260108-36AL
Power:	18x4W	36x1,7W	4x15W	36x3W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°
Dimensions:				

General specifications




LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC12V/ DC24V
Operating temperature:	-20°C~+40°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



FLOOD LIGHT

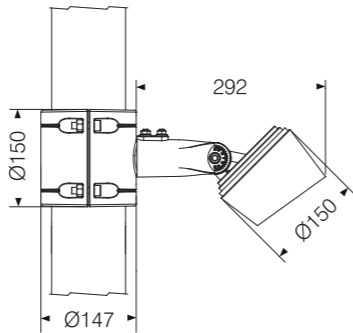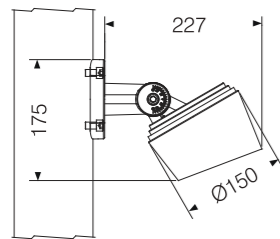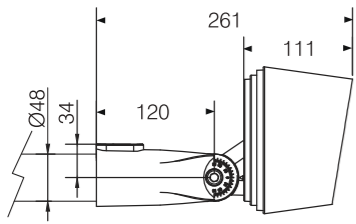



Model:	FL15010-1SL	FL15020-4SL
Power:	10W	20W
Beam angle:	1,5°/ 2°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°	
Dimensions:		

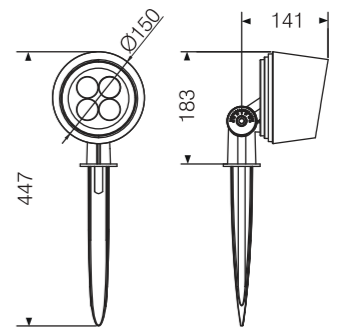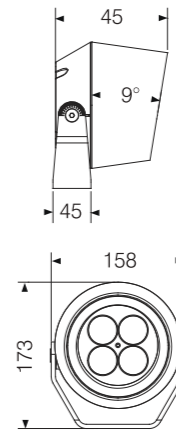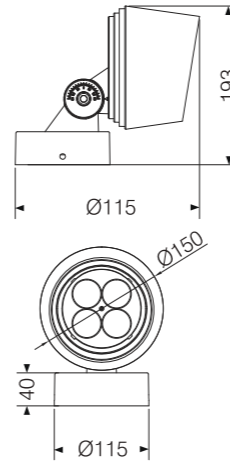






General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



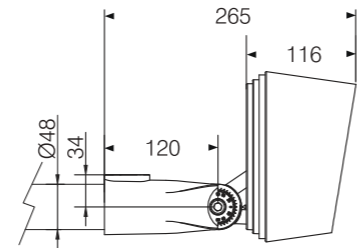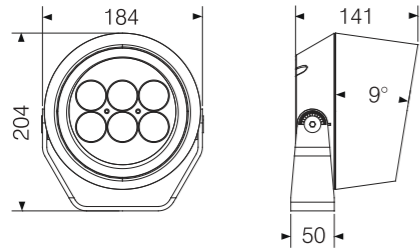






Model:	FL18022-6SL	FL18030-6SL	FL18036-6SL
Power:	22W	30W	36W
Beam angle:	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°		
Dimensions:			

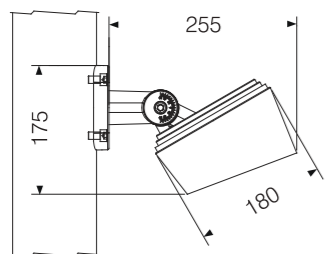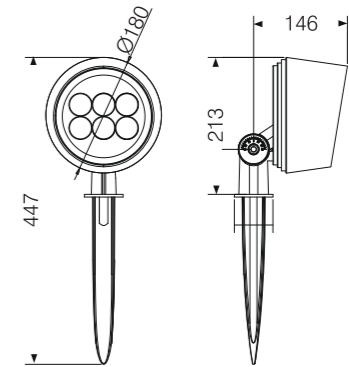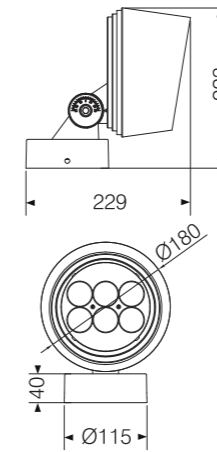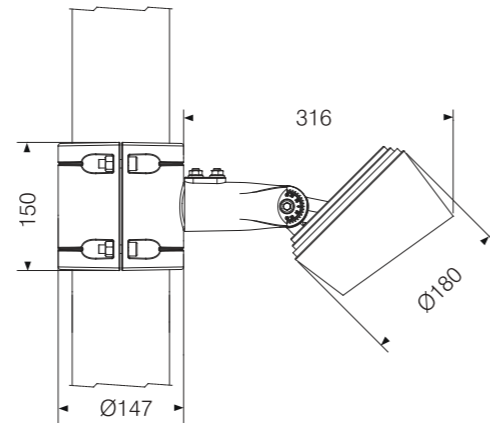

General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb Anti-glare Shield

FLOOD LIGHT

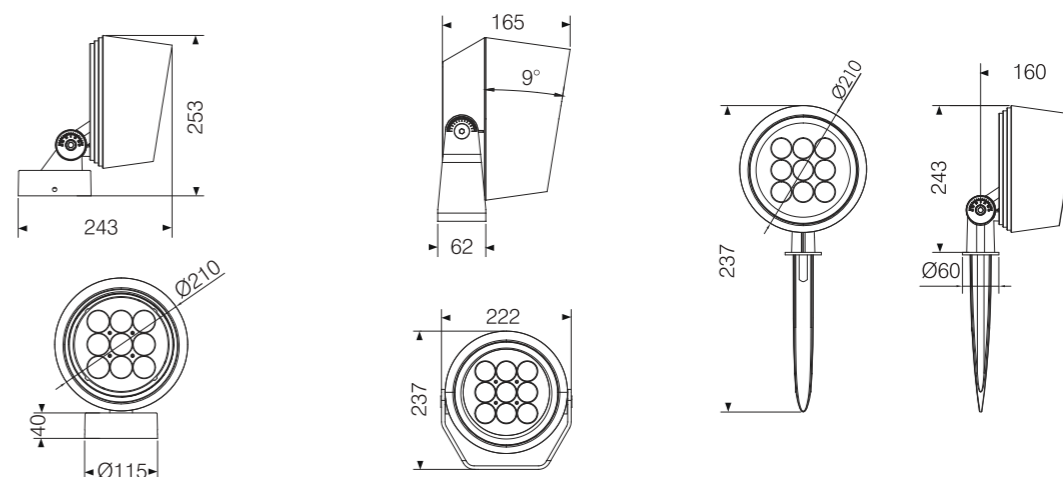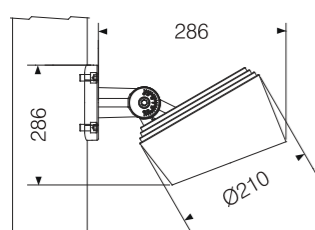
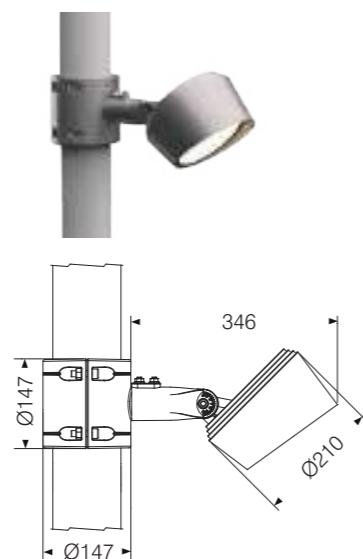
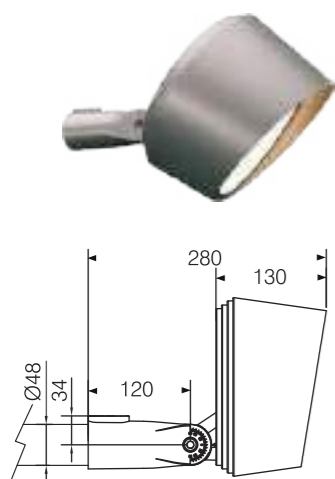


Model:	FL210-30SL	FL210-45SL	FL210-60SL	FL210-100SL
Power:	30W	45W	60W	100W
Beam angle:	1,5°	2°	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°	
Dimensions:				



General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C ~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



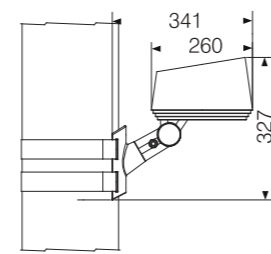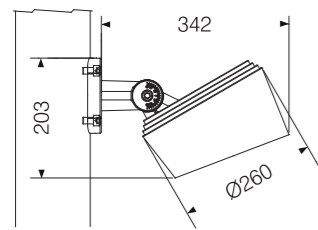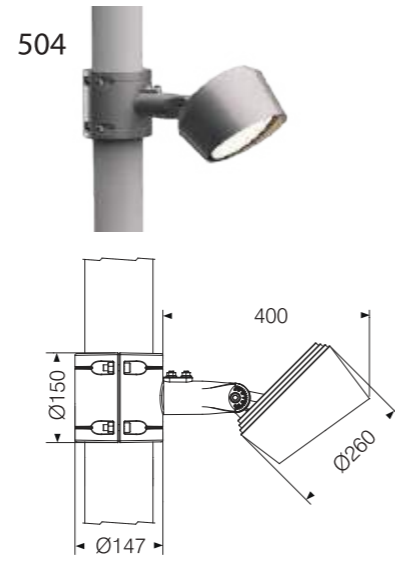




Model:	FL30340-16SL	FL30360-16SL	FL30375-16SL	FL303100-16SL
Power:	40W	60W	75W	100W
Beam angle:	1,5°	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°		
Dimensions:				

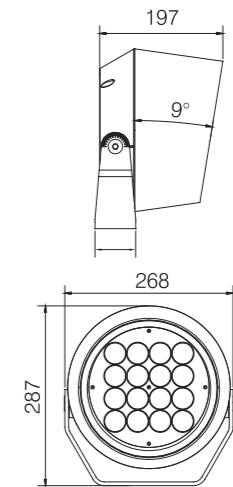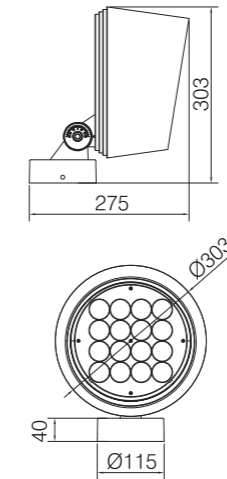





General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

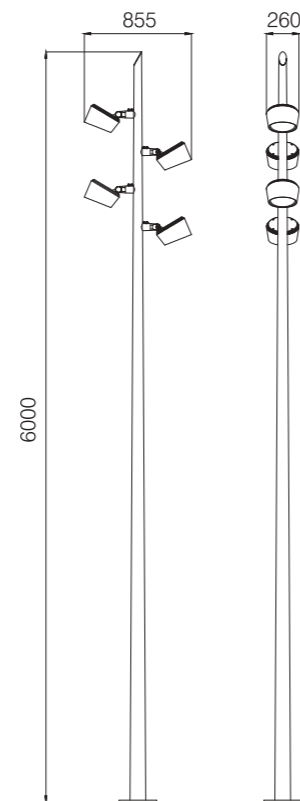

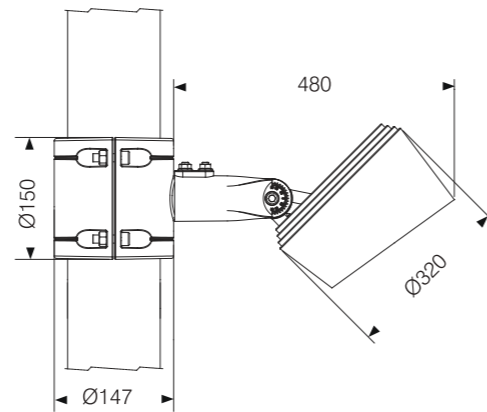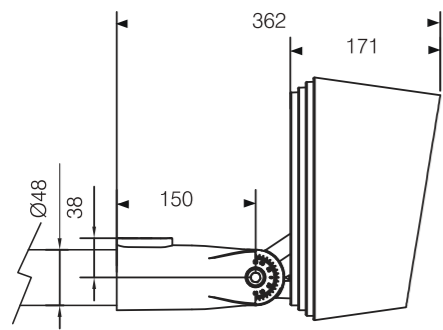

Model:	FL328120-25SL	FL328150-25SL	FL328160-25SL	FL328180-25SL
Power:	120W	150W	160W	180W
Beam angle:	2,6°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°/ 15x60°			
Dimensions:				




General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL360-120SL	FL360-200SL	FL360-240SL
Power:	120W	200W	240W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 20°/ 30°/ 40°/ 60°		
Dimensions:			

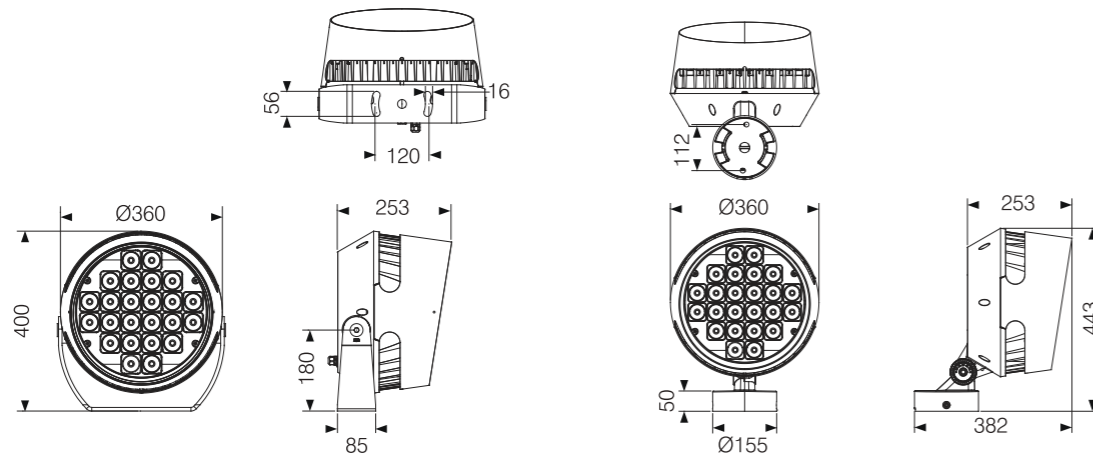


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL435-190SL	FL435-300SL	FL435-360SL
Power:	190W	300W	360W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 20°/ 30°/ 40°/ 60°		
Dimensions:			

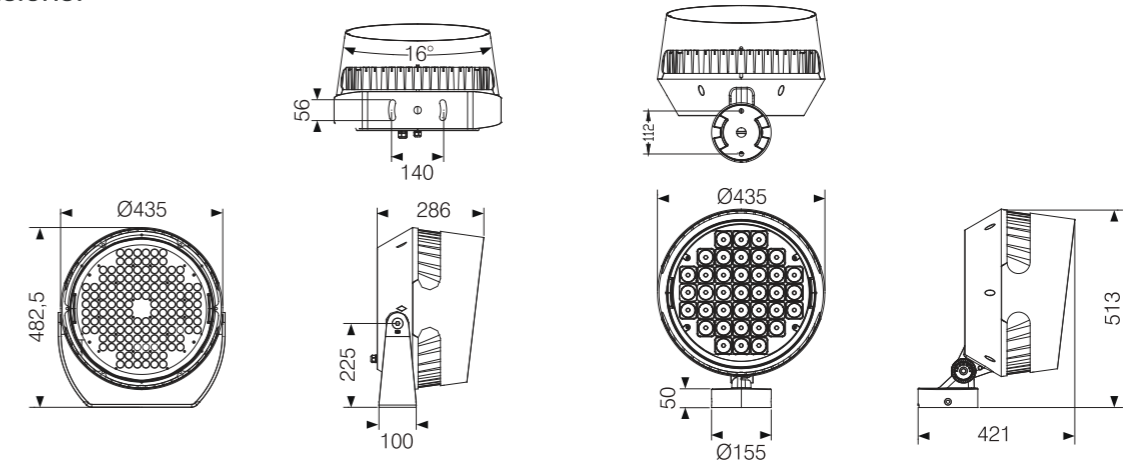

General specifications


LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield

FLOOD LIGHT

FLOOD LIGHT



Model:	FL8506-3LD
Power:	6W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

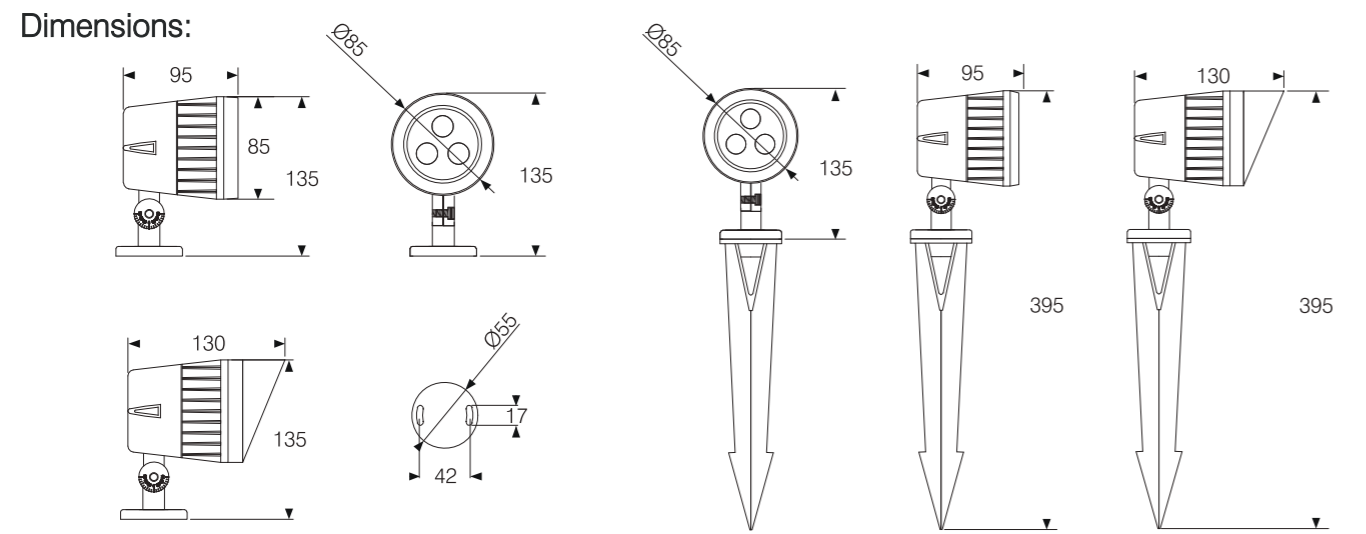


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C ~ +50°C
Accessory	Hood, Spike, Honeycomb



Model:	FL12520-9LD
Power:	20W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°

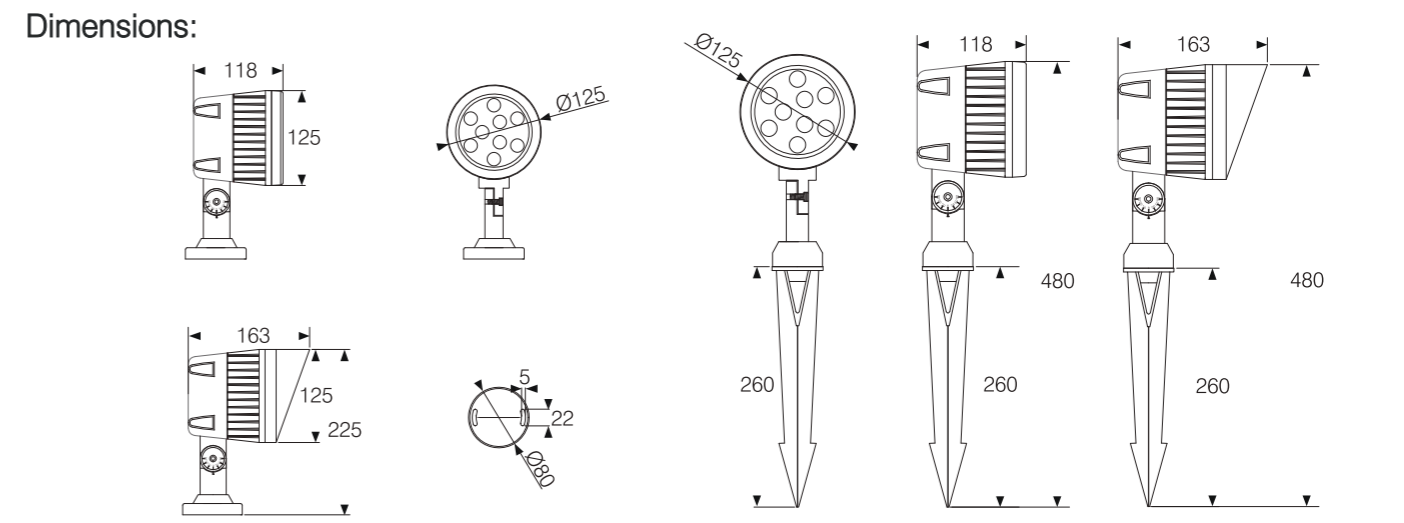


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C ~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model: FL16030-18LD
 Power: 30W
 Beam angle: 8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
 Dimensions:

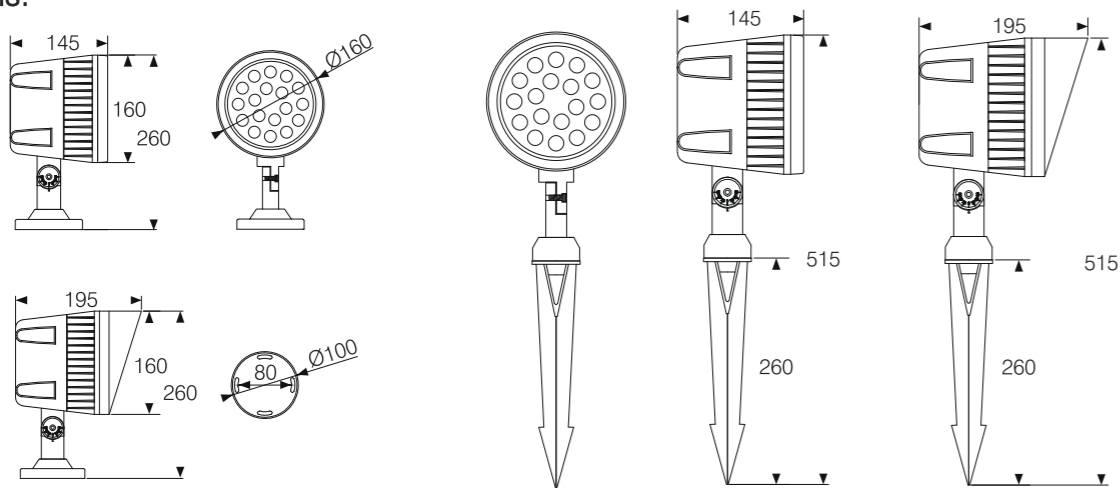


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model: FL18060-36LD
 Power: 60W
 Beam angle: 8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
 Dimensions:

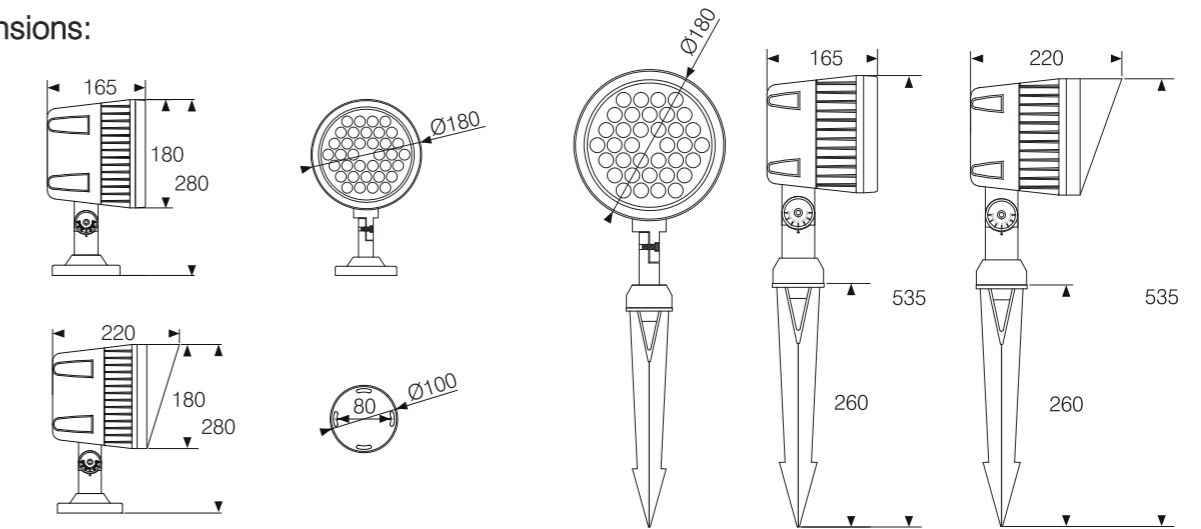


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL8506-3ULD
Power:	6W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

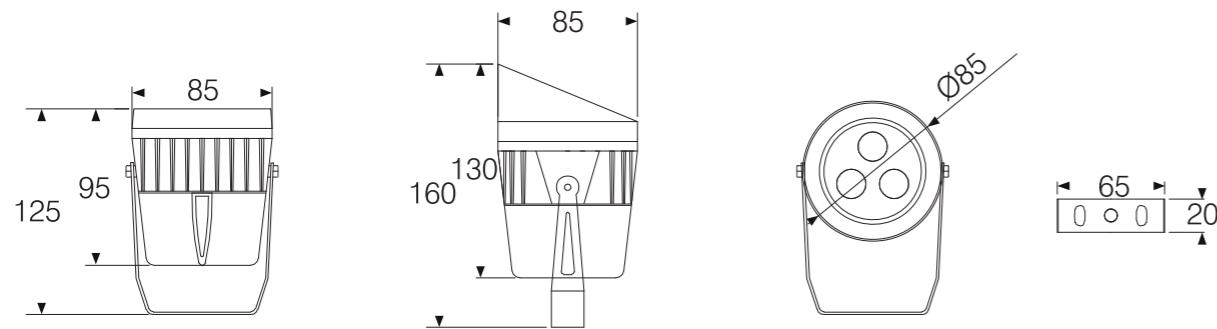


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL12520-9ULD
Power:	20W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

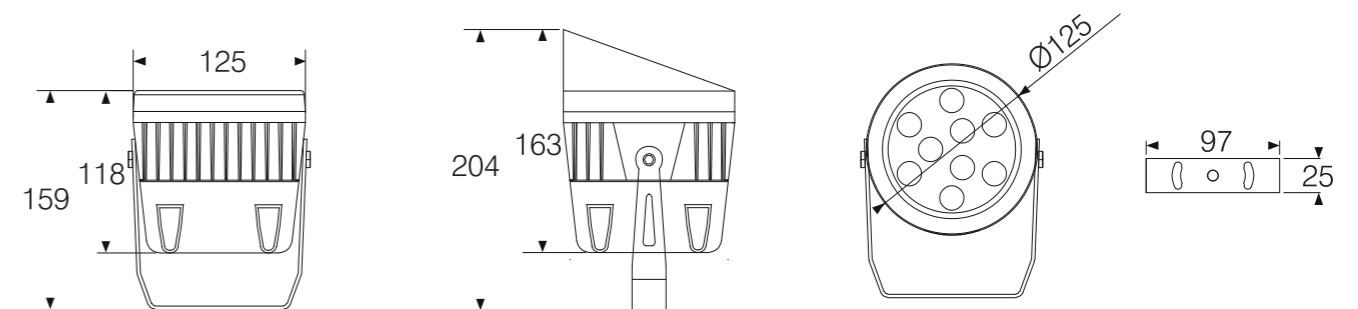


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL16030-18ULD
Power:	30W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

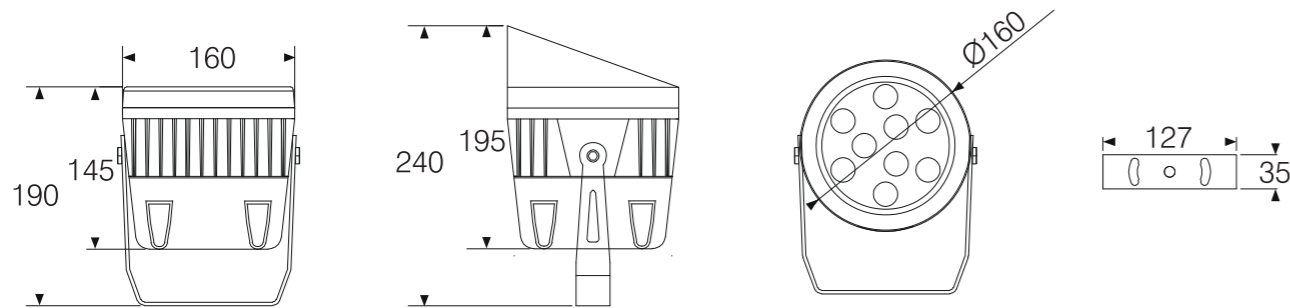


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL18060-36ULD
Power:	60W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

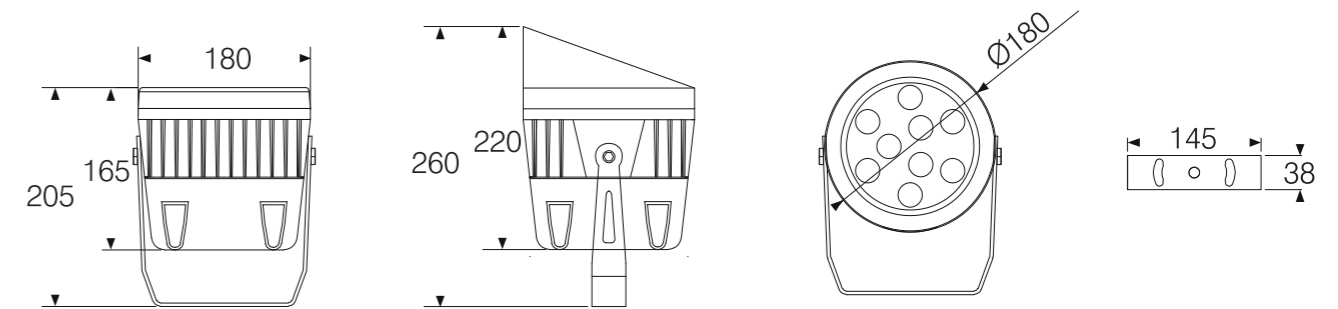


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb



Model:	FL265-48LD
Power:	80W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	



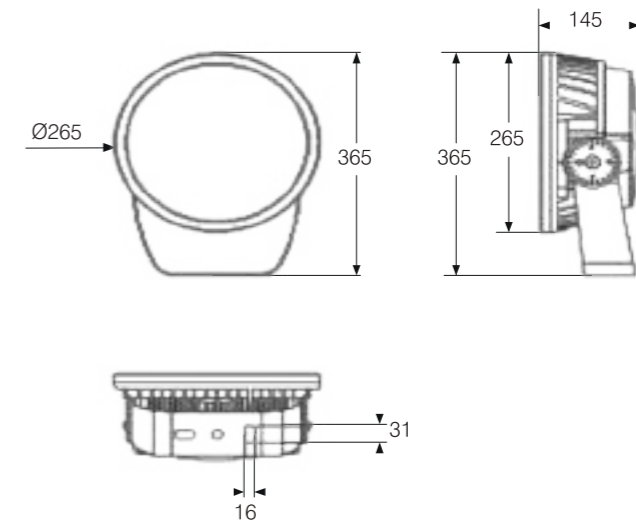


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Round-meshed Grill, Honeycomb, Anti-glare Shield



Model:	FL200-80SL	FL200-90SL	FL200-150SL
Power:	80W	90W	150W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°		
Dimensions:			

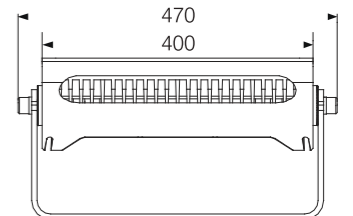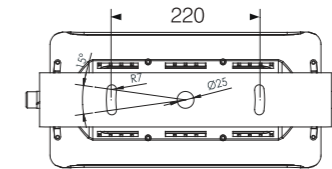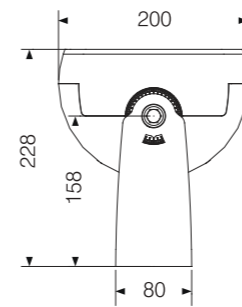


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-256V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL145-40SL	FL145-56SL	FL145-72SL
Power:	40W	56W	72W
Beam angle:	2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°/ 15x60°		
Dimensions:			

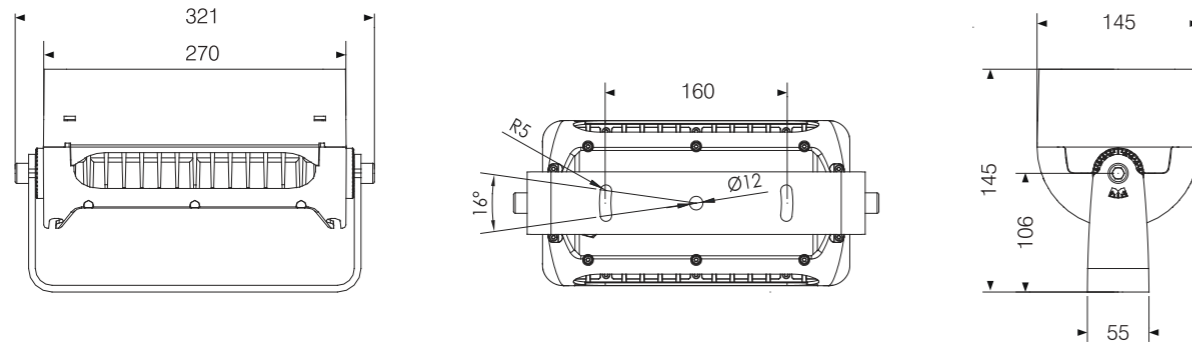


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL240-180SL	FL240-210SL	FL240-300SL
Power:	180W	210W	300W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°		
Dimensions:			

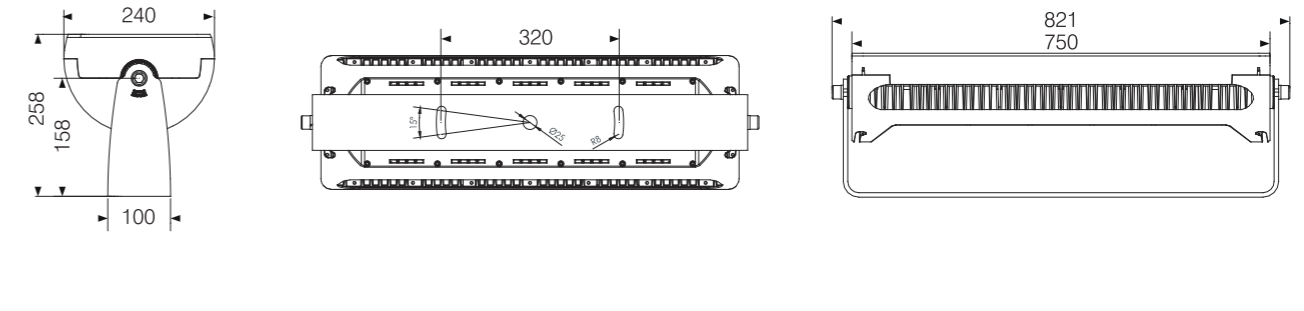


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL952-400SL	FL952-800SL
Power:	400W	800W
Beam angle:	1,5°/ 2°/ 4,5°/ 8°/ 12°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°	
Dimensions:		

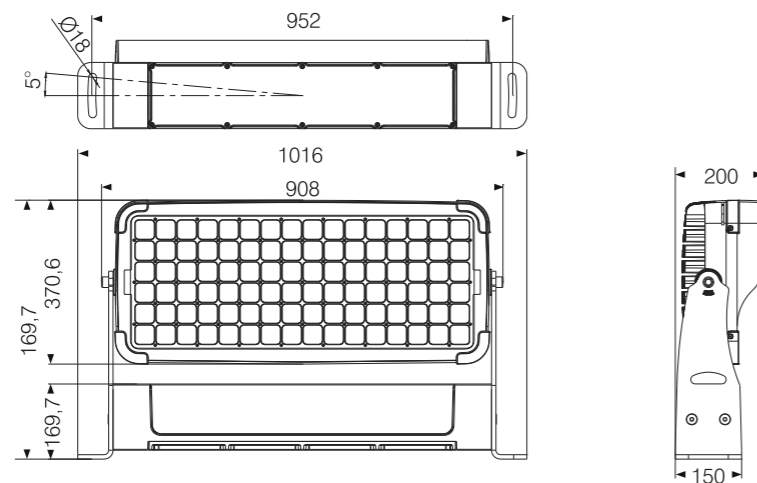


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL900-360SL	FL900-420SL	FL900-600SL	FL900-720SL
Power:	360W	420W	600W	720W
Beam angle:	1,5°/ 2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°			
Dimensions:				

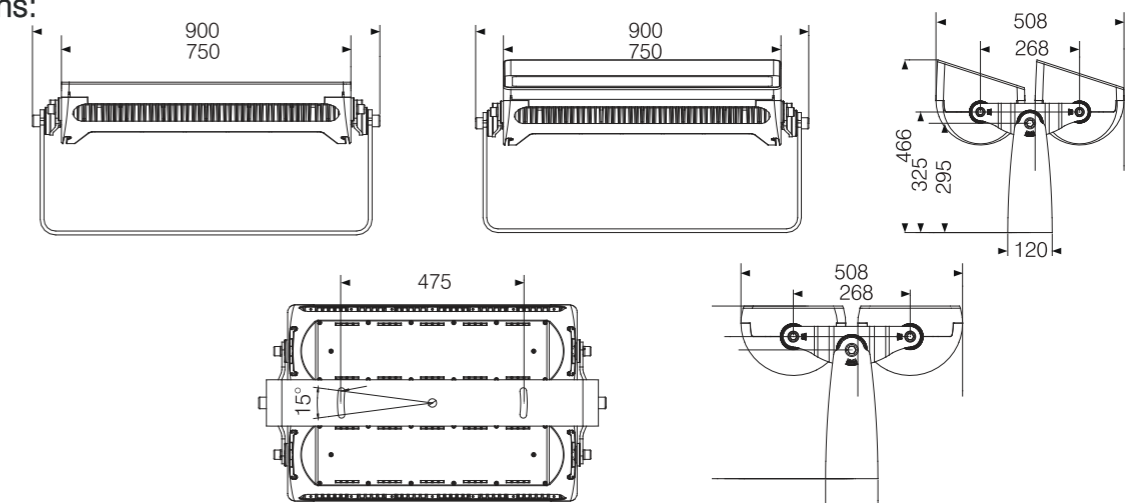


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW/ RGBWCLA
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb, Anti-glare Shield

FLOOD LIGHT



Model:	FL18915-06LT	FL18920-06LT	FL33930-12LT	FL48945-18LT
Power:	15W	20W	30W	45W
Beam angle:	4°/ 8°/ 25°/ 36°/ 45°/ 10x30°			
Dimensions:				

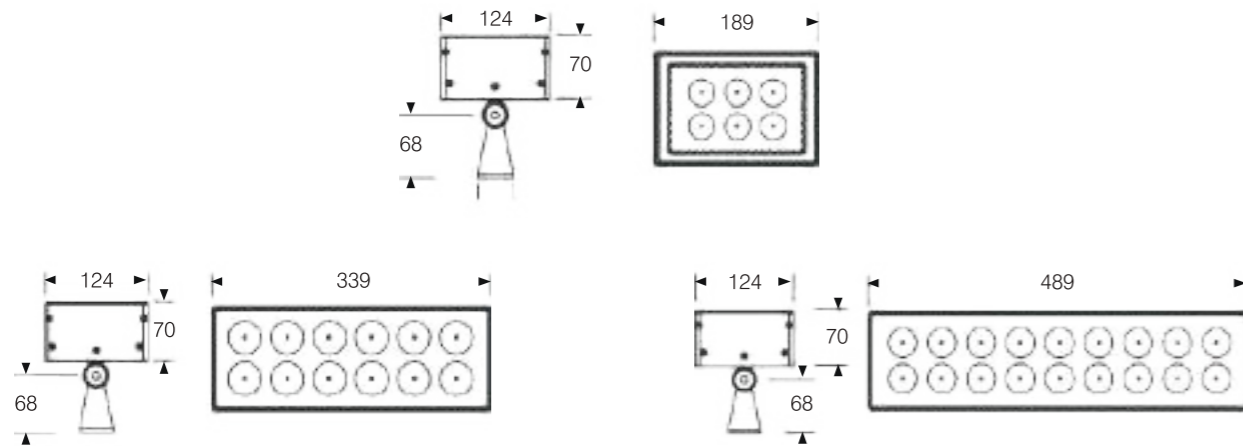


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL63964-24LT	FL78975-30LT	FL93890-36LT
Power:	64W	75W	90W
Beam angle:	4°/ 8°/ 25°/ 36°/ 10x30°		
Dimensions:			

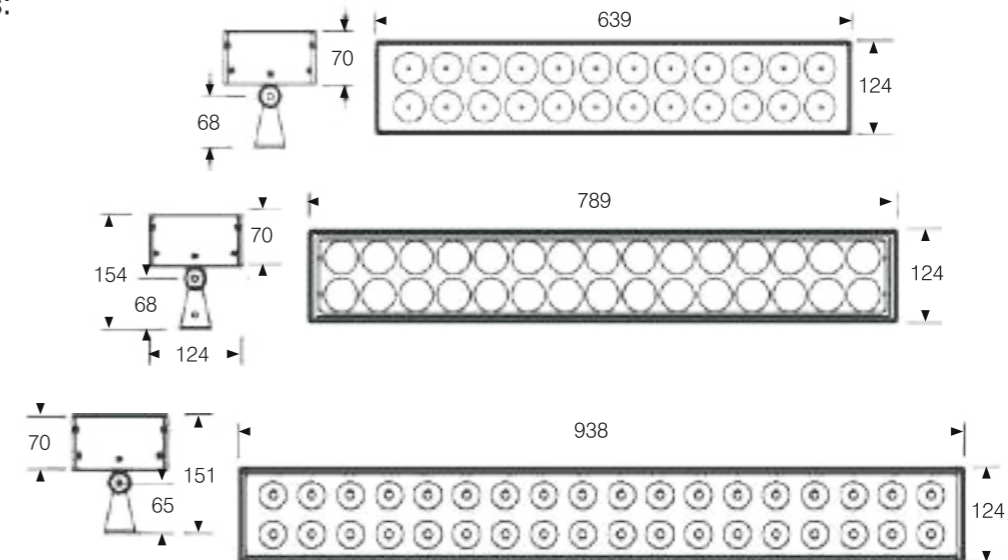


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL21236-12LT	FL21248-12LT	FL29472-18LT	FL37696-24LT
Power:	36W	48W	72W	96W
Beam angle:	4°/ 8°/ 25°/ 36°/ 60°			
Dimensions:				

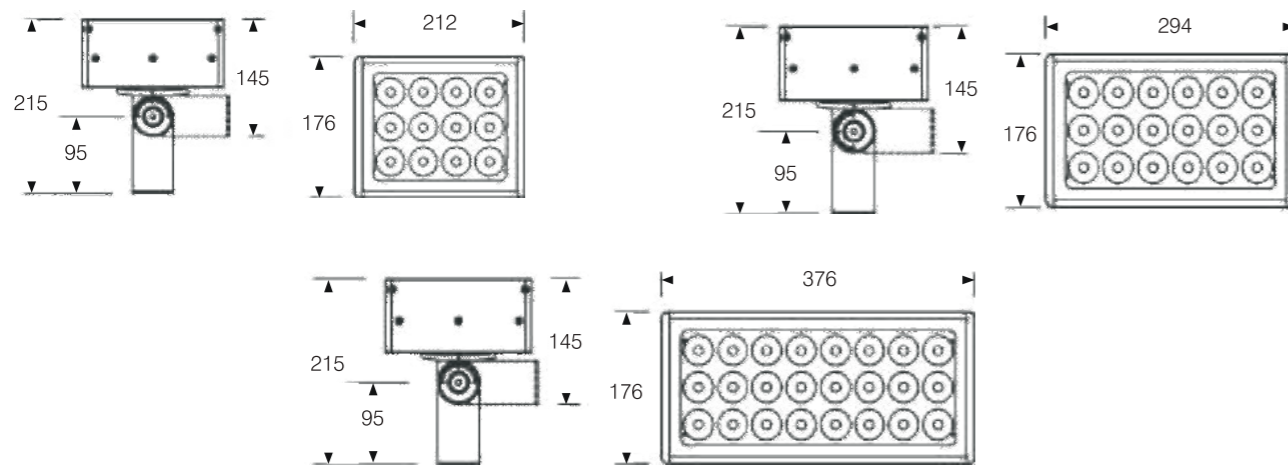


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT




Model:	FL540144-36LT	FL663180-45LT
Power:	144W	180W
Beam angle:	4°/ 8°/ 25°/ 36°/ 60°	
Dimensions:		

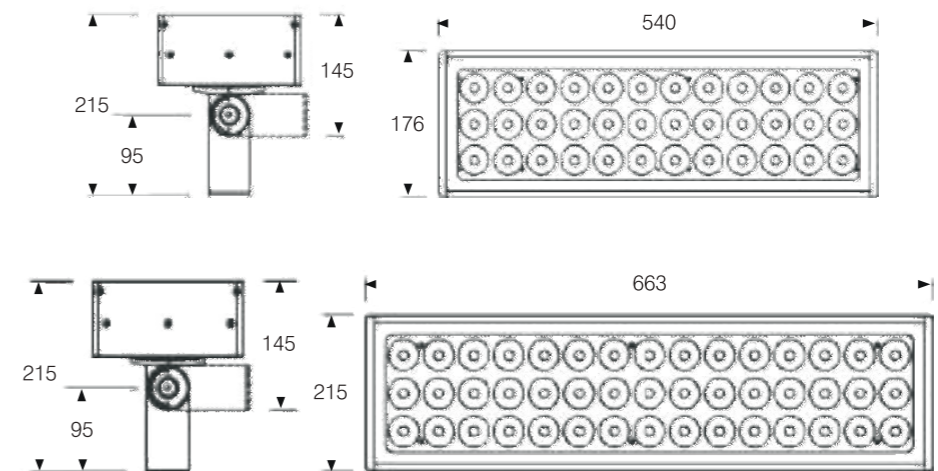


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

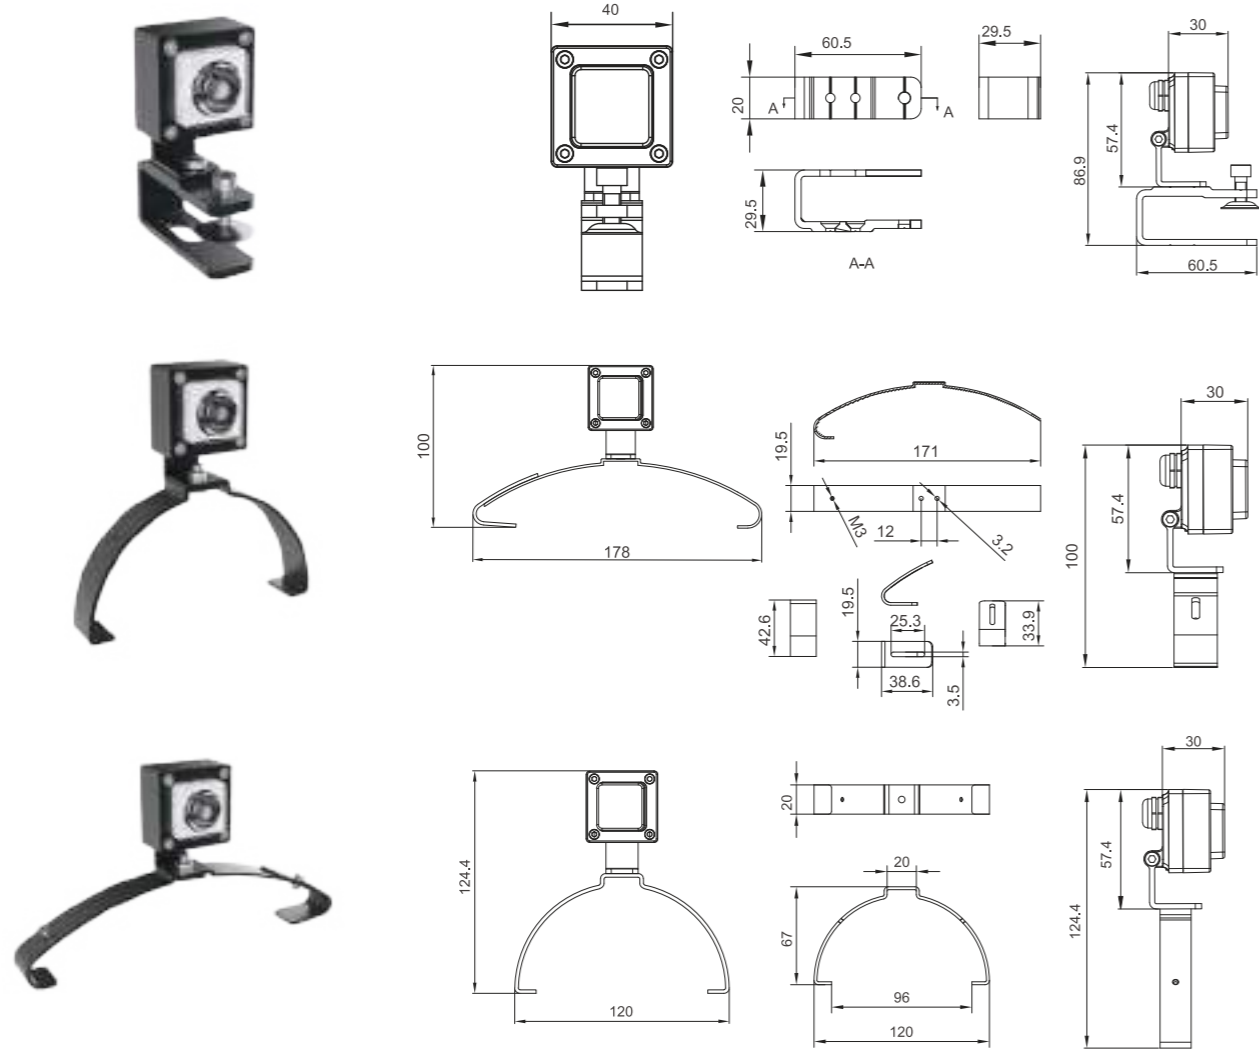


Model:	FL4030-01RL	FL4030-03RL
Power:	1W	3W
Beam angle:	7°/ 15°/ 25°/ 15°x45°	
Dimensions:		

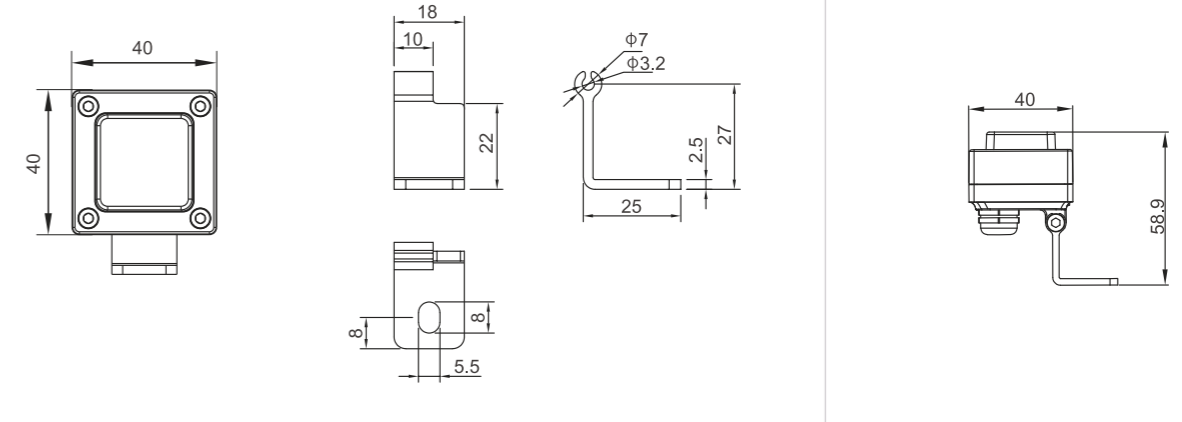


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-glare Baffle



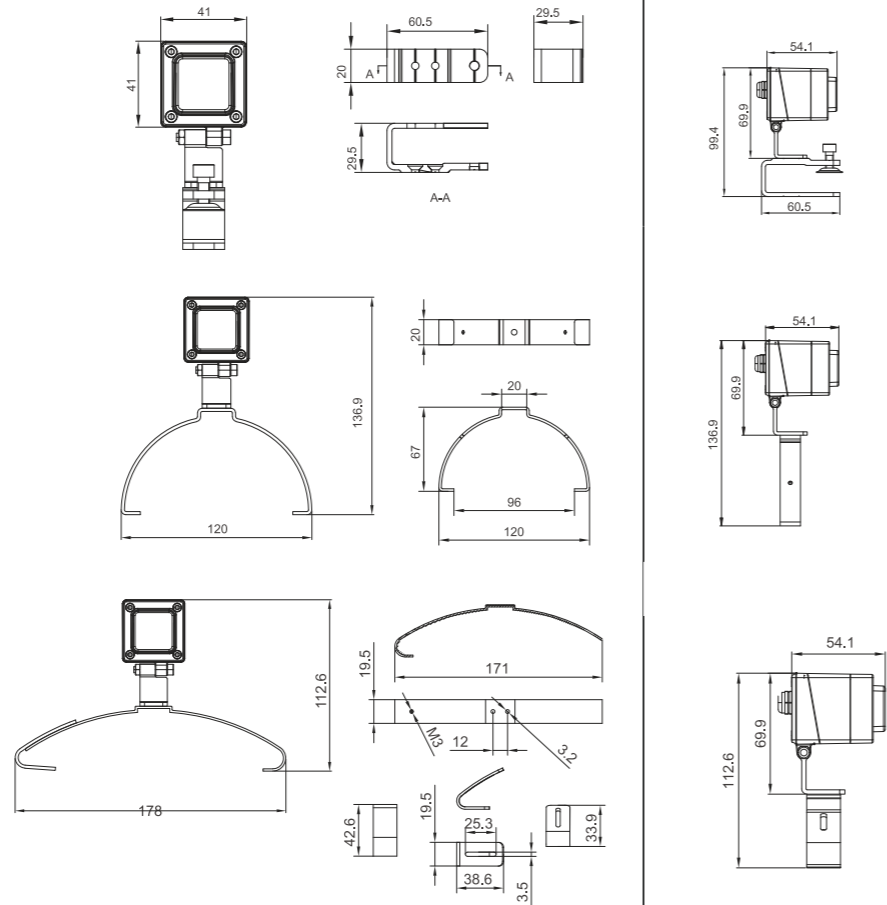

Model:	FL4054-01RL	FL4054-03RL
Power:	1W	3W
Beam angle:	7°/ 15°/ 25°/ 15x45°	
Dimensions:		

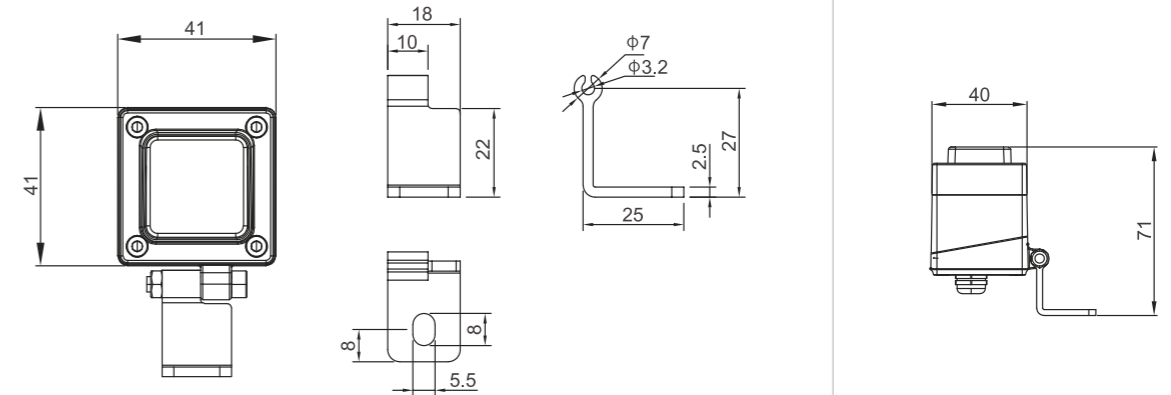


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~+45°C
Accessory	Anti-Glare Baffle





Model:	FL5966-03RL	FL5966-06RL	FL5966-06RL	FL5966-08RL
Power:	3W	6W	6W	8W
Beam angle:	4°	15°/ 30°	7°/ 20°/ 30°	8°/ 15°/ 30°/ 15x45°
Dimensions:				

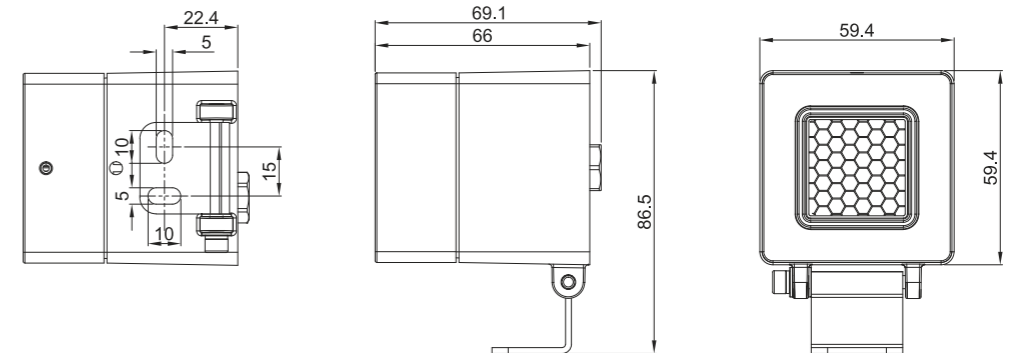


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGBW
IP rating:	66
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C ~ +45°C
Accessory	Anti-glare Baffle

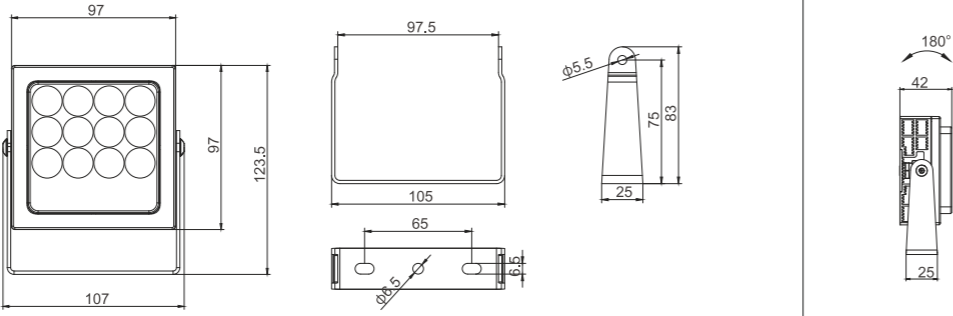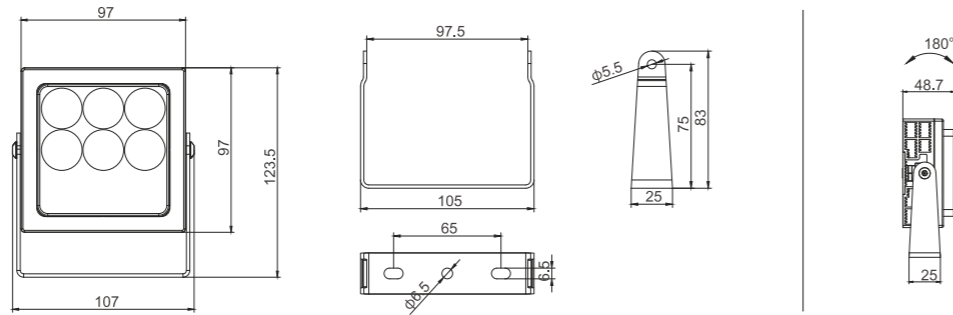

Model:	FL10003-12LD	FL10006-12LD	FL10012-12LD
Power:	12W	12W	12W
Beam angle:	10°/ 15°/ 30°	7°	15°/ 20°/ 30°/ 40°
Dimensions:			

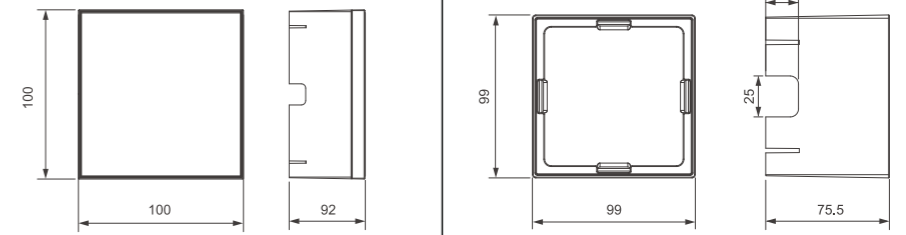

General specifications


LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-glare Baffle



FLOOD LIGHT



Model:	FL7008-4LD
Power:	8W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

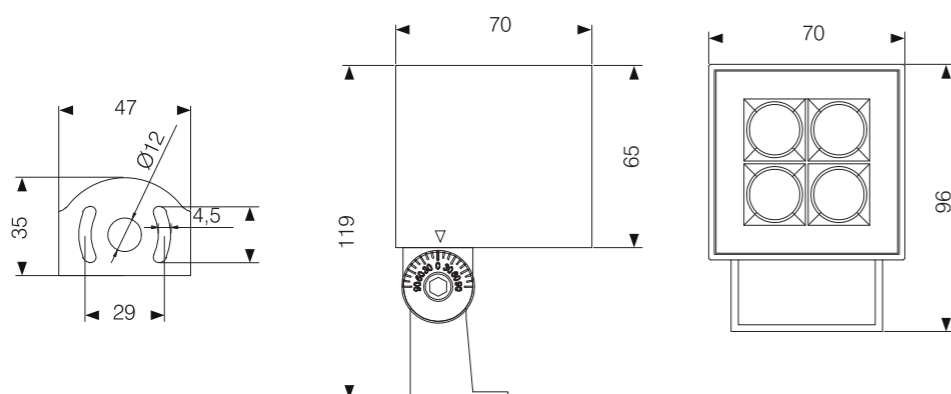


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL11018-9LD
Power:	18W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 10x60°
Dimensions:	

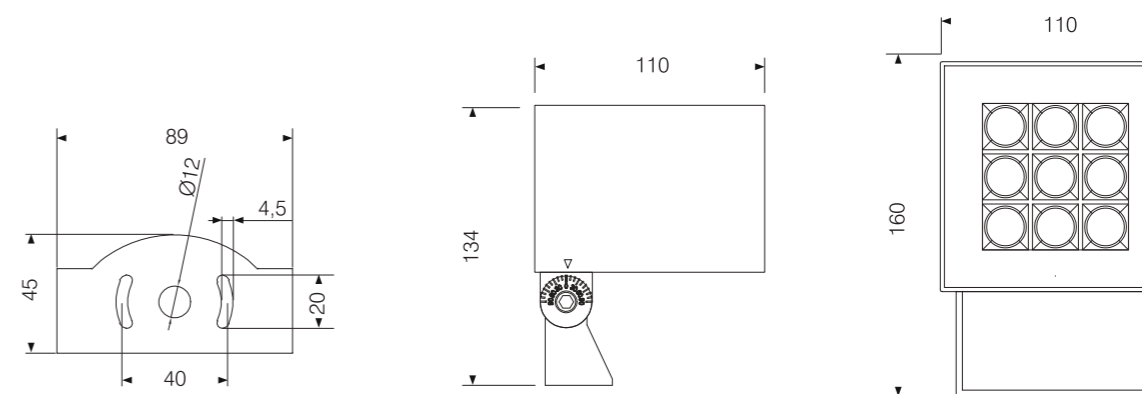


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL13530-16LD
Power:	30W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

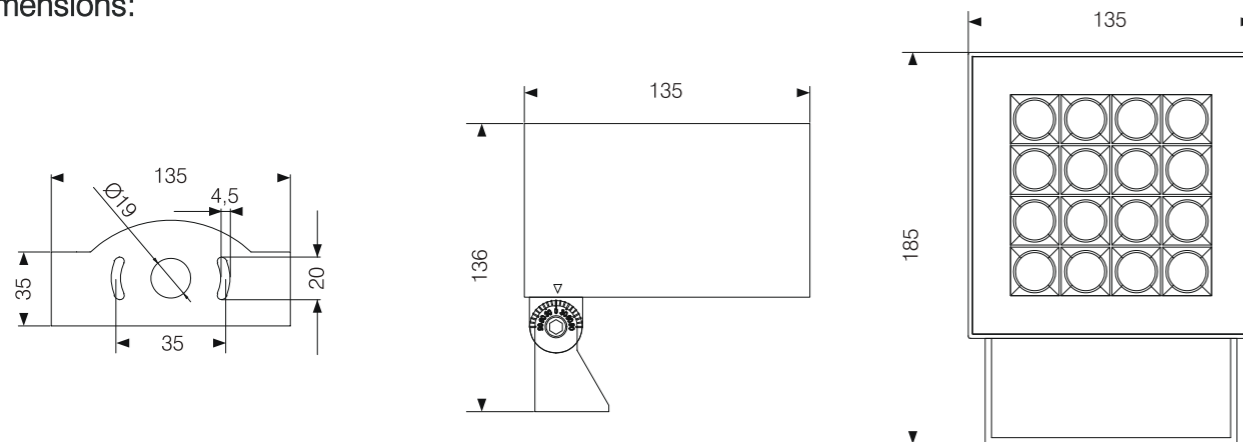


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL16050-25LD
Power:	50W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

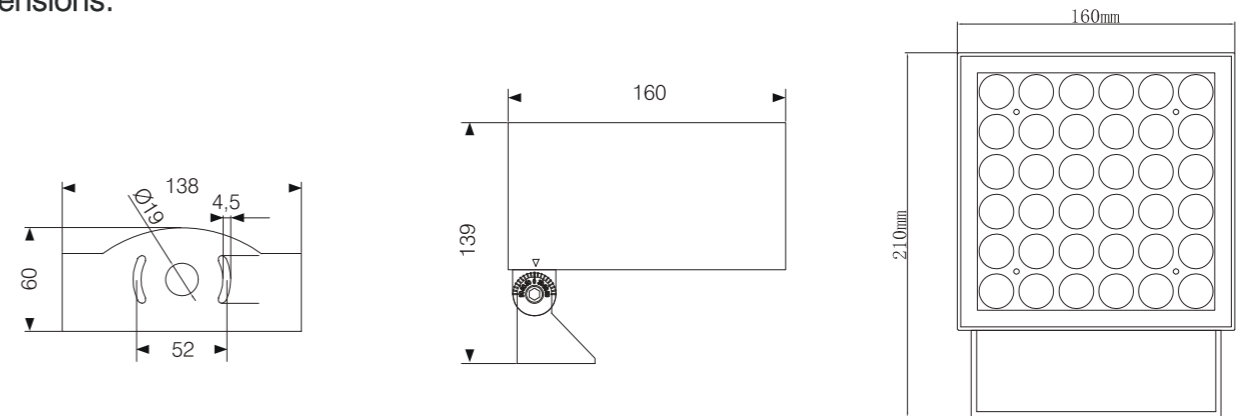


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL540-288LT	FL540-330LT
Power:	288W	330W
Beam angle:	4°/ 8°/ 15°/ 25°/ 36°/ 45°/ 60°	
Dimensions:		

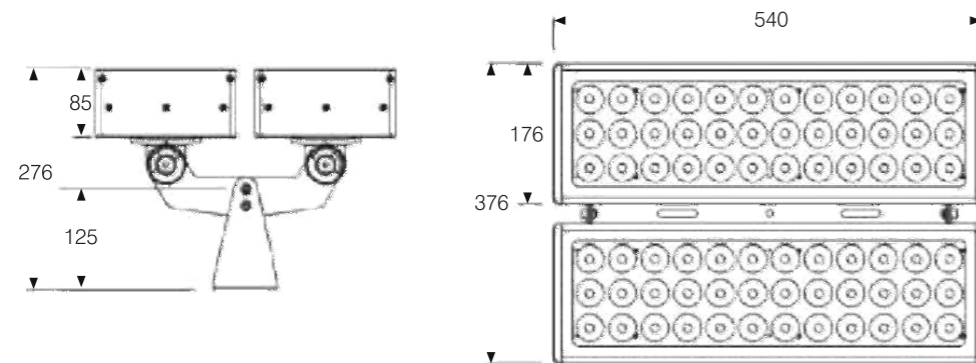


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL663-540LT	FL663-600LT
Power:	540W	600W
Beam angle:	4°/ 8°/ 15°/ 25°/ 36°/ 45°	
Dimensions:		

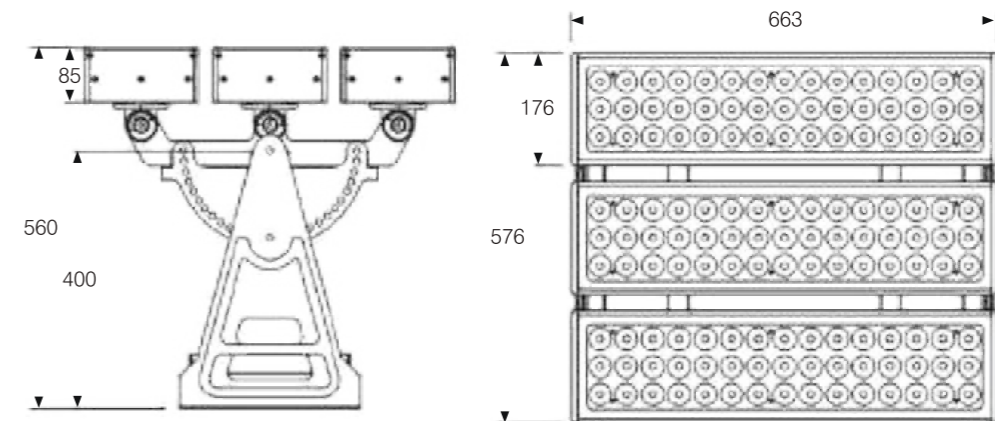


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb



Model:	FL20024-24LD
Power:	24W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

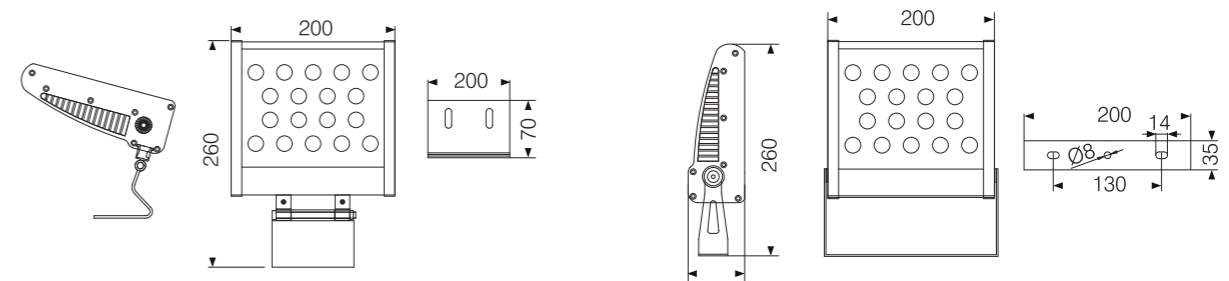


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL27036-36LD
Power:	36W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

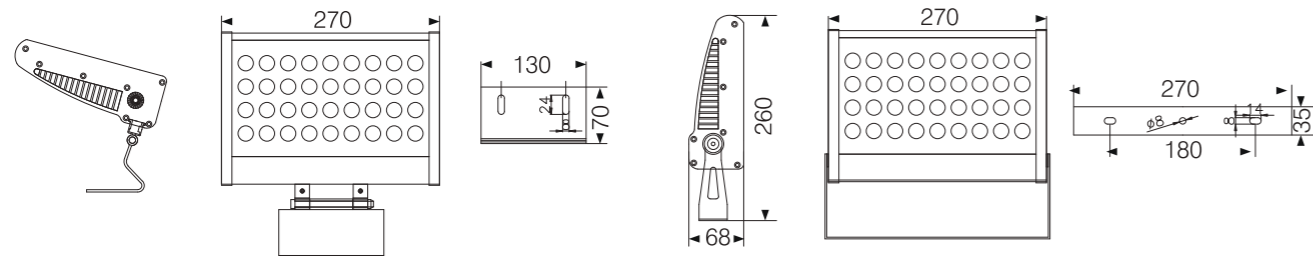


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

FLOOD LIGHT



Model:	FL31054-54LD
Power:	54W
Beam angle:	5°/ 15°/ 25°/ 40°/ 60°/ 15x45°/ 15x60°
Dimensions:	

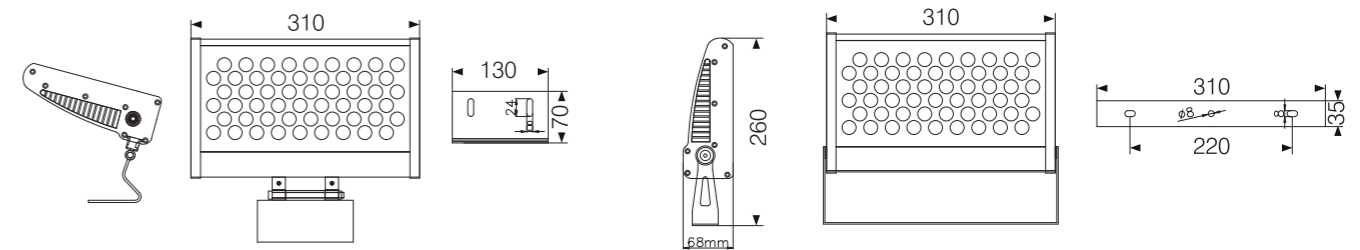

General specifications


LED:	Osram/ Cree
CRI(Ra):	> 85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb



UNDERWATER LIGHT



Model:	UW38-1.5LT	UW55-02SL
Power:	1,5W	2W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°	
Dimensions:		

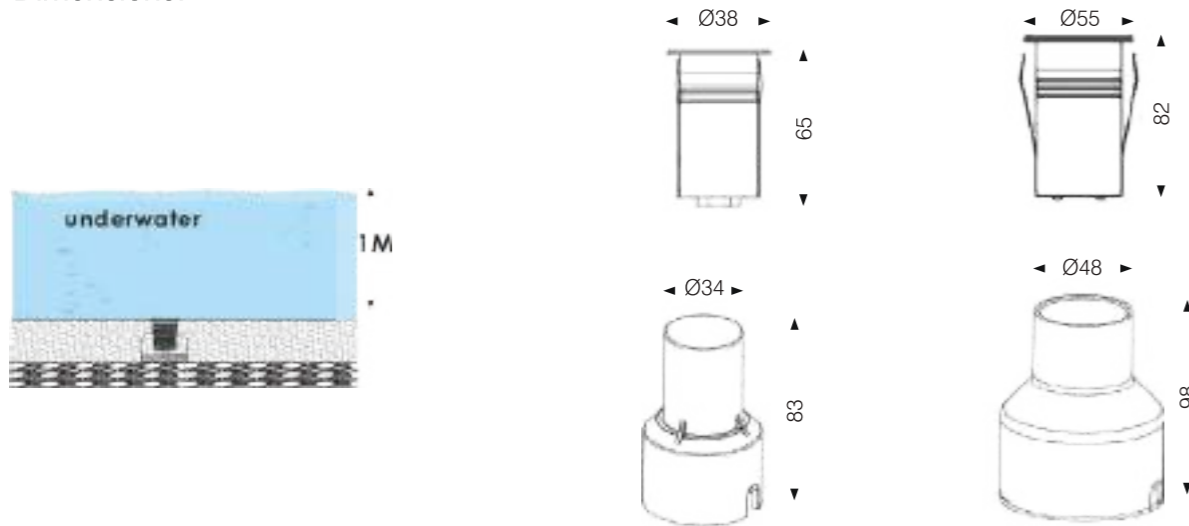


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW69-02SLT	UW69-02ALT
Power:	2W	2W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°	
Dimensions:		

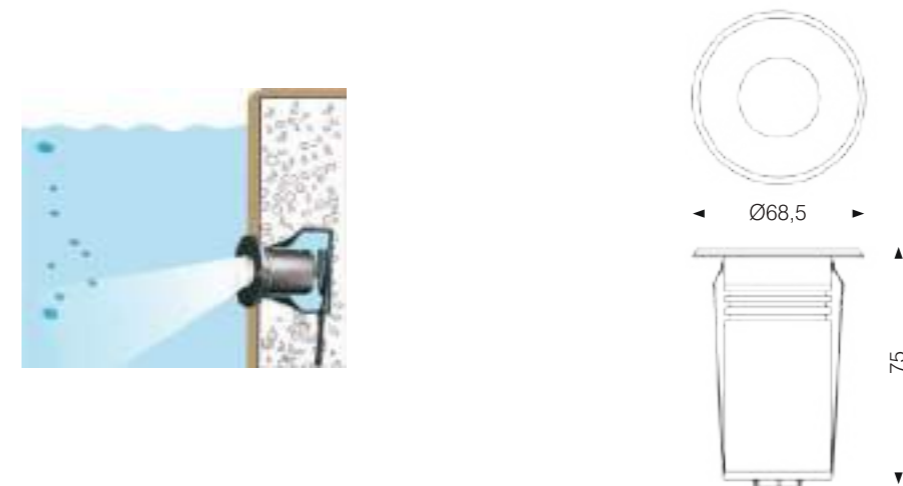


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW45-01PL
Power:	1,5W
Beam angle:	15°/ 25°/ 38°/ 45°
Dimensions:	

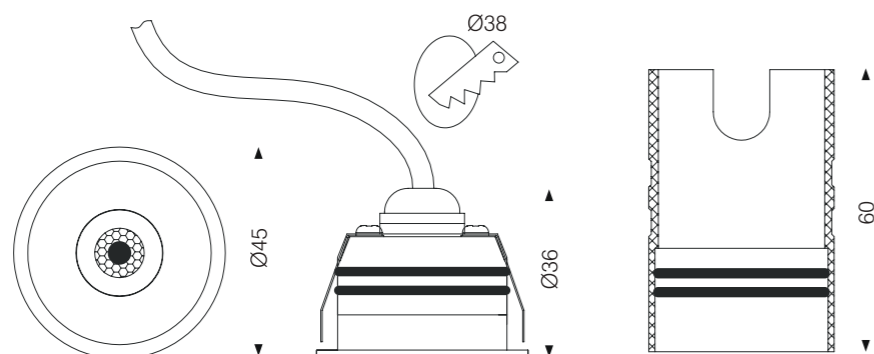


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Solid Passivated (Anodizing). Aluminum CNC machined as standard Stainless steel 316
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW180-10SL	UW180-16SL	UW145-07SL	UW145-12SL
Power:	10W	16W	7W	12W
Beam angle:	8°/ 12°/ 20°/ 30°/ 45°			
Dimensions:				

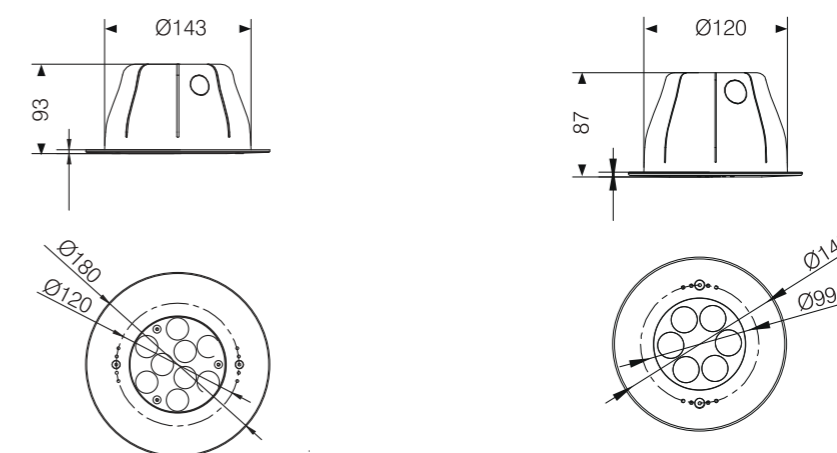


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW98-02LT
Power:	2W
Beam angle:	15°/ 30°/ 45°/ 60°/ 35°x45°
Dimensions:	

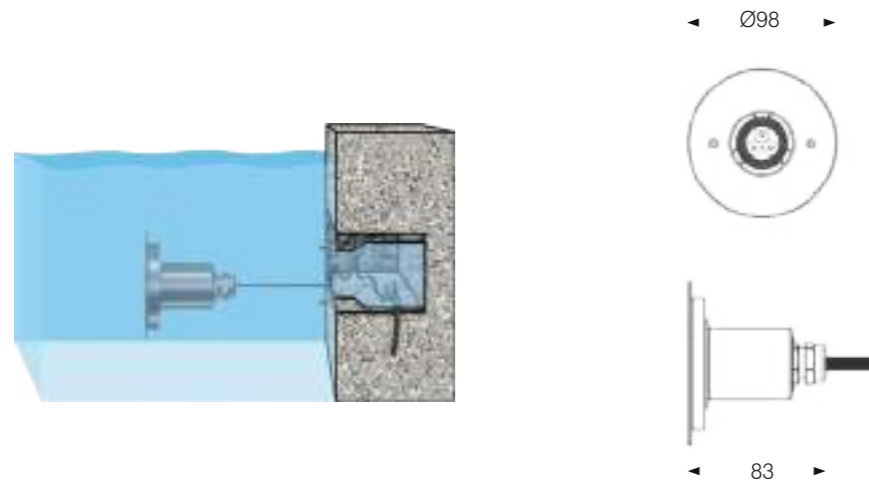


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW118-06LT
Power:	6W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

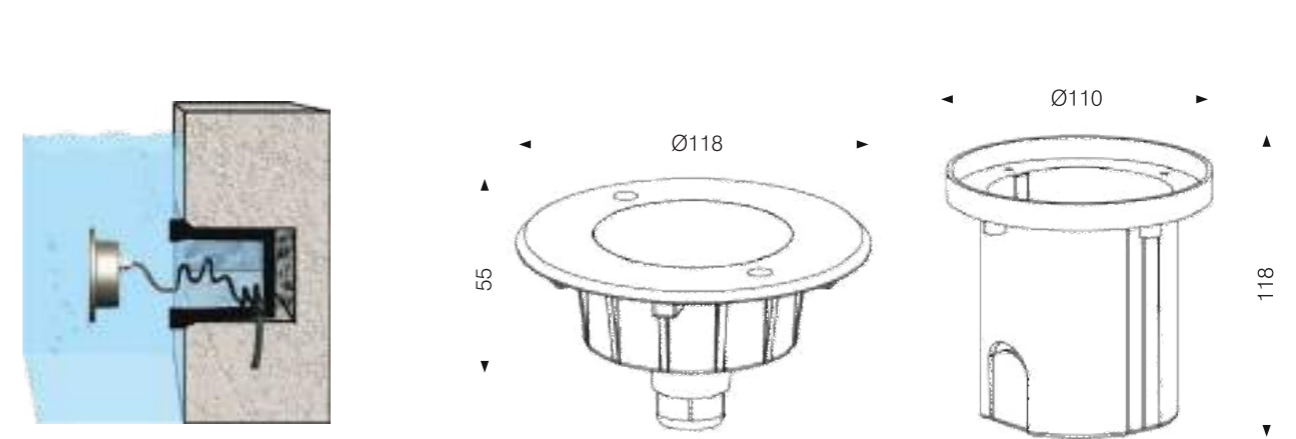


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW135-08LT
Power:	8,6W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

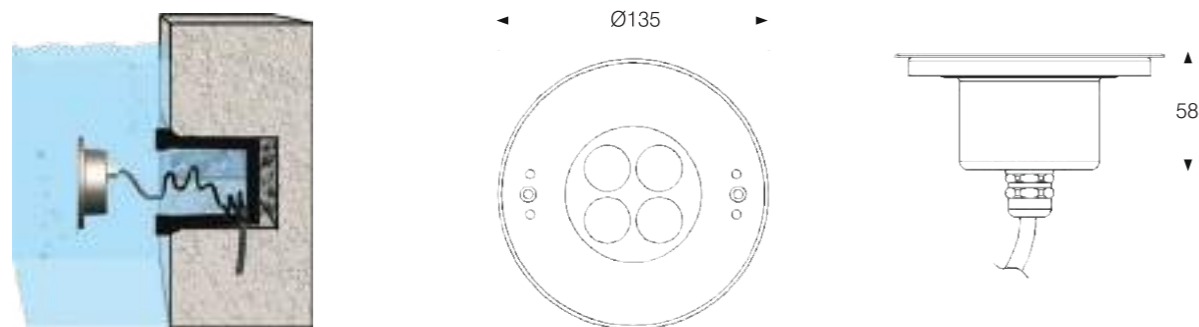


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW180-12LT
Power:	12W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

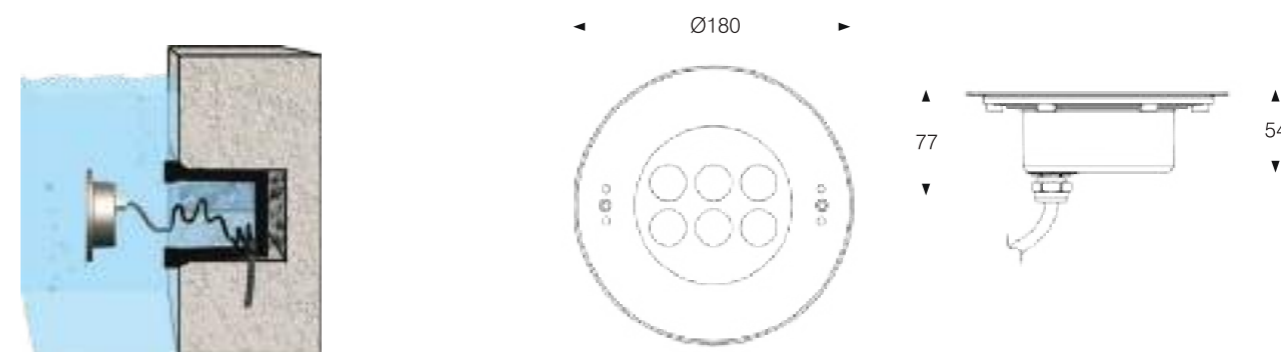


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW205-24LT
Power:	24W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

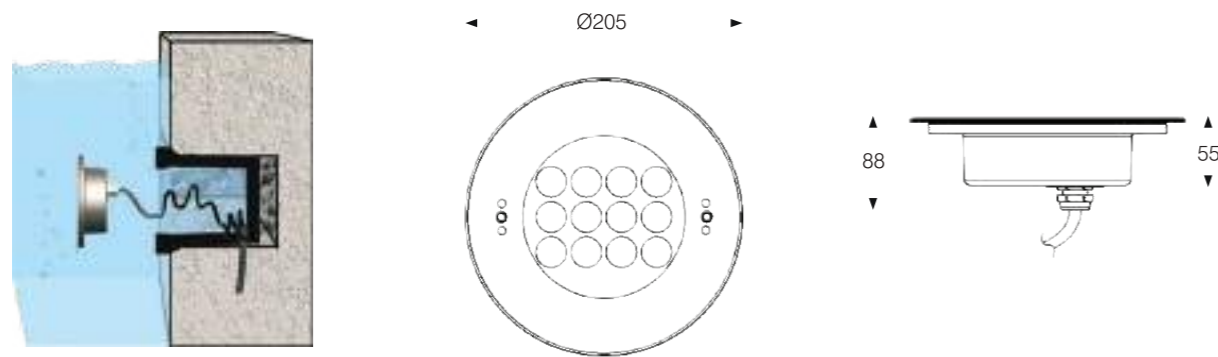


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW250-36LT
Power:	36W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

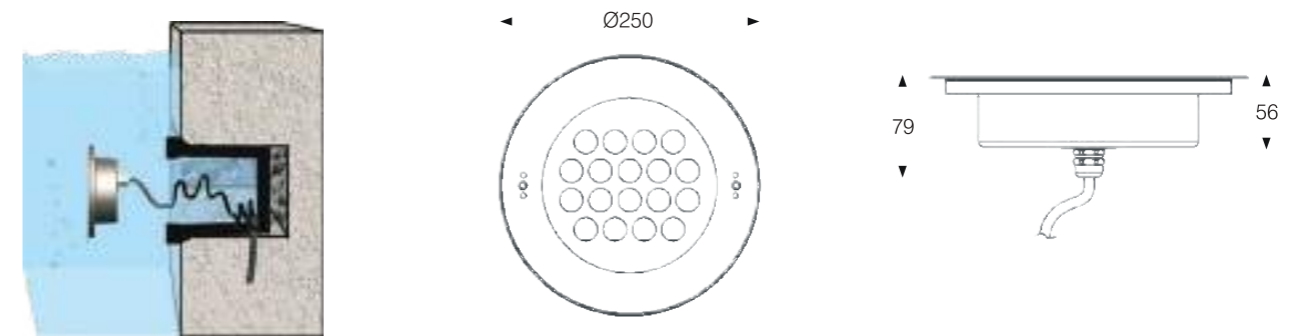


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW149-12LT	UW170-15LT
Power:	12W	15W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 90°/ 100°	
Dimensions:		

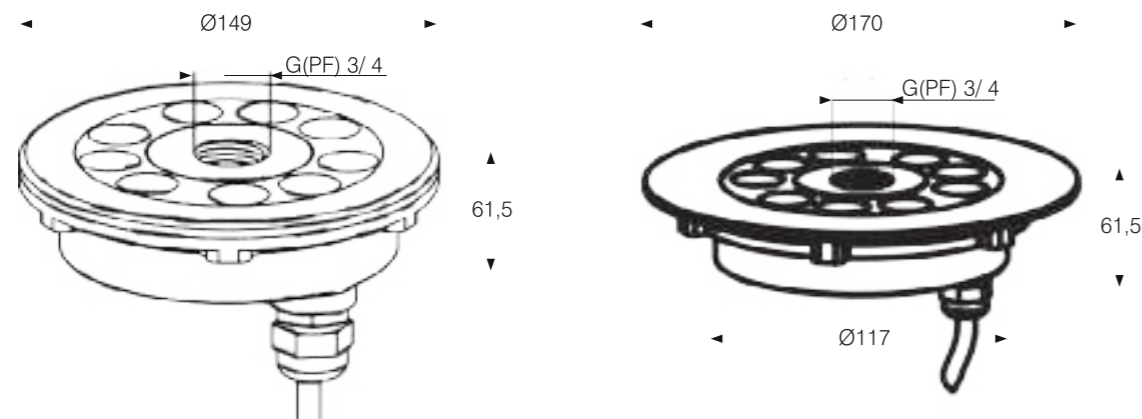


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW182A-24LT	UW182B-36LT	UW200A-24LT	UW200B-36LT
Power:	24W	36W	24W	36W
Beam angle:	10°/ 15°/ 25°/ 30°/ 60°/ 90°			
Dimensions:				

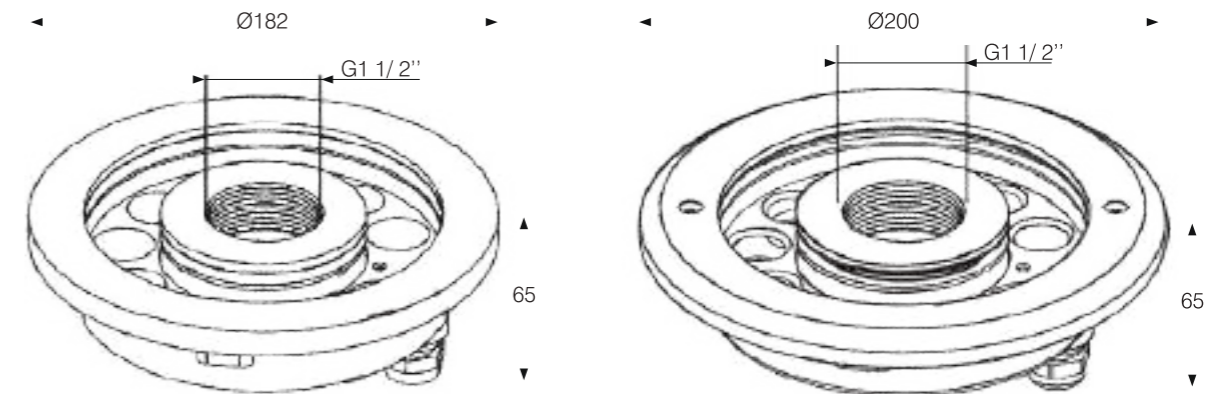


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW160-18LT
Power:	18W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 90°/ 100°
Dimensions:	

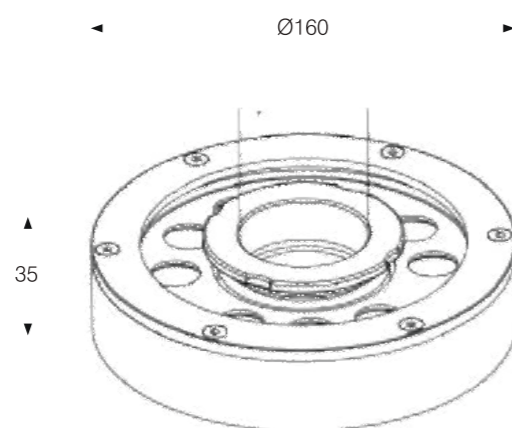


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT




Model:	UW115-12LT
Power:	12W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°/ 100°
Dimensions:	

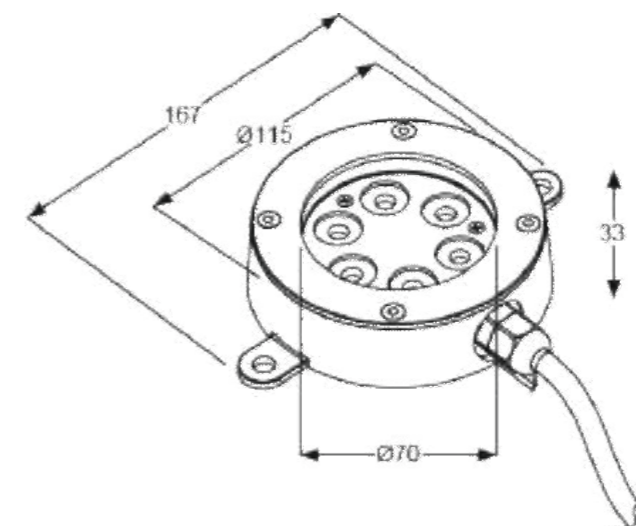


General specifications





LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

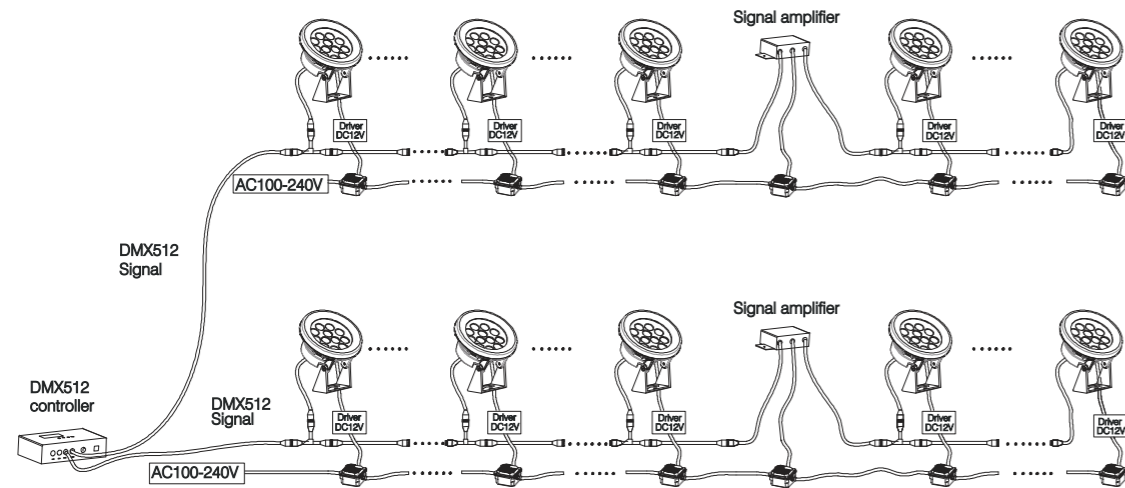

Single color

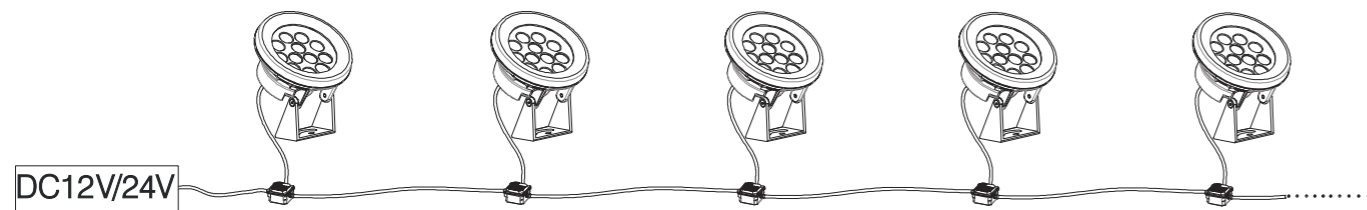

Model:	UW140-10SI	UW140-16SL	UW115-06SL	UW115-12SL
Power:	10W	16W	6W	12W
Beam angle:	8° / 12° / 20° / 30° / 45°			
Dimensions:				




General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW153-12LT
Power:	12W
Beam angle:	15°/ 30°/ 40°/ 60°
Dimensions:	

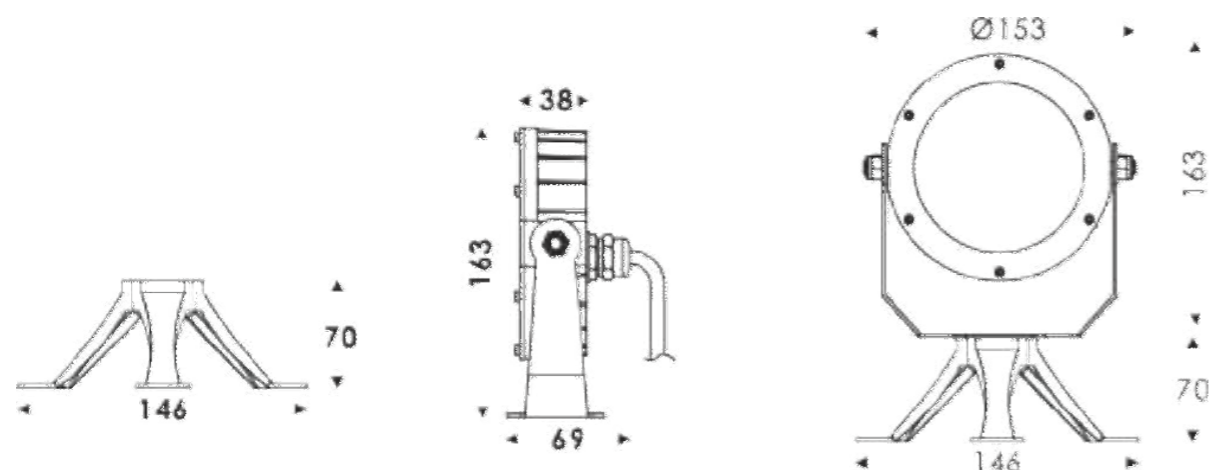


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW153-18LT
Power:	18W
Beam angle:	30°/ 40°/ 60°
Dimensions:	

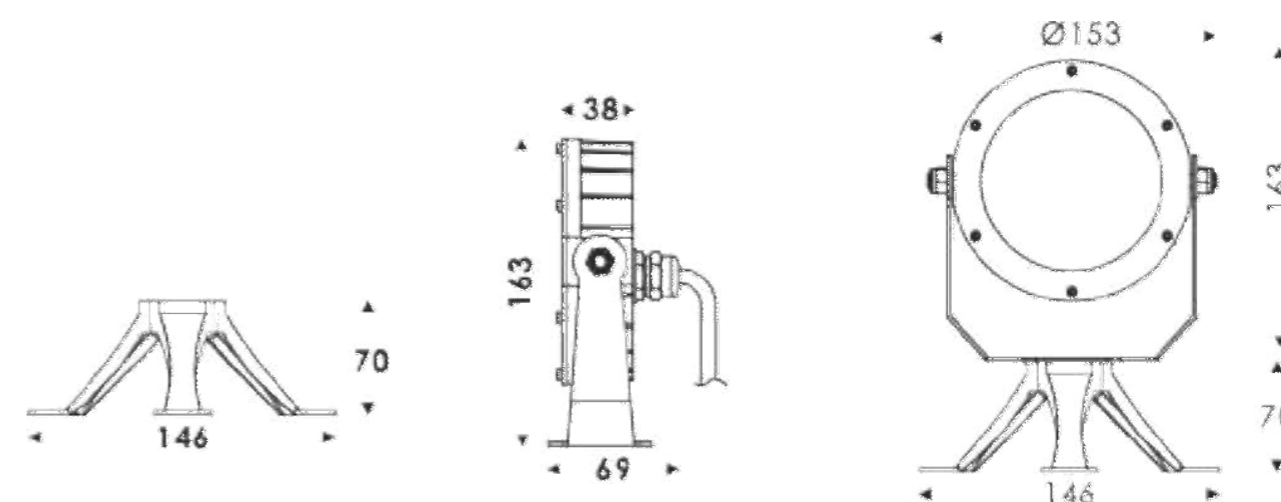


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW180-24LT
Power:	24W
Beam angle:	10°/ 25°/ 40°/ 60°/ 90°
Dimensions:	

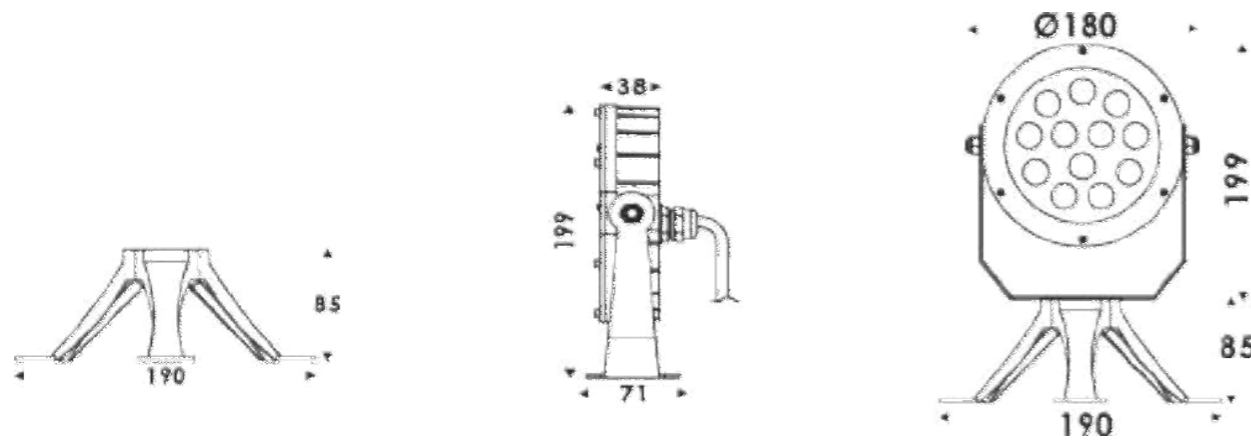


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW220-42LT
Power:	42W
Beam angle:	15°/ 30°/ 40°/ 60°
Dimensions:	

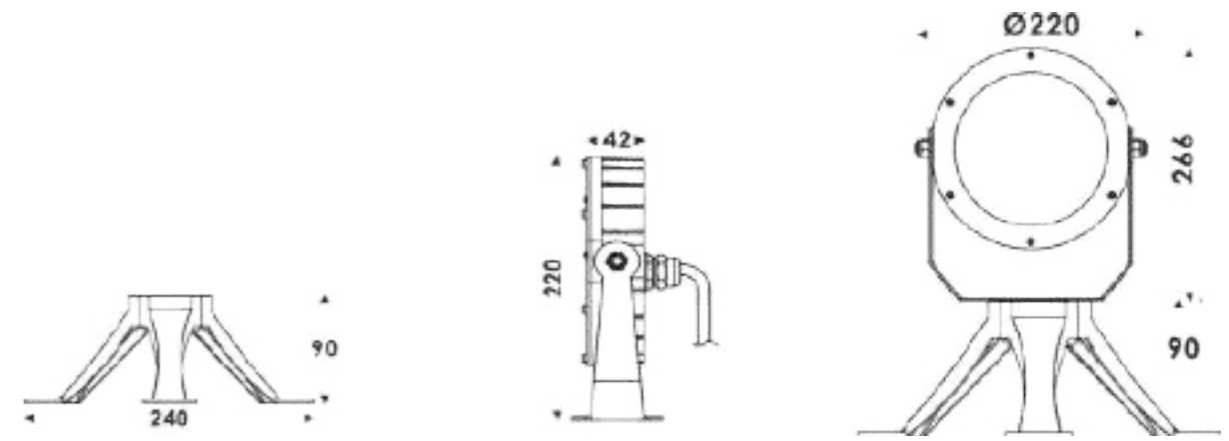


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW113A-06LT
Power:	6W
Beam angle:	15°/ 25°/ 36°/ 40°/ 60°/ 90°
Dimensions:	

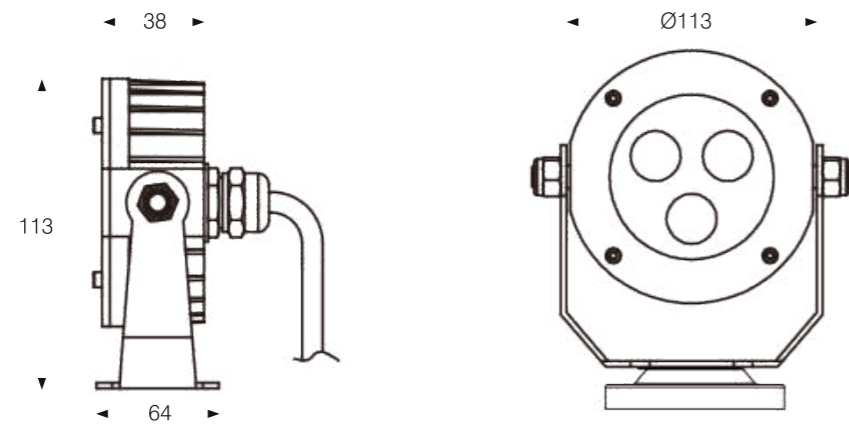


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW113B-06LT
Power:	6W
Beam angle:	15°/ 25°/ 36°/ 40°/ 60°/ 90°
Dimensions:	

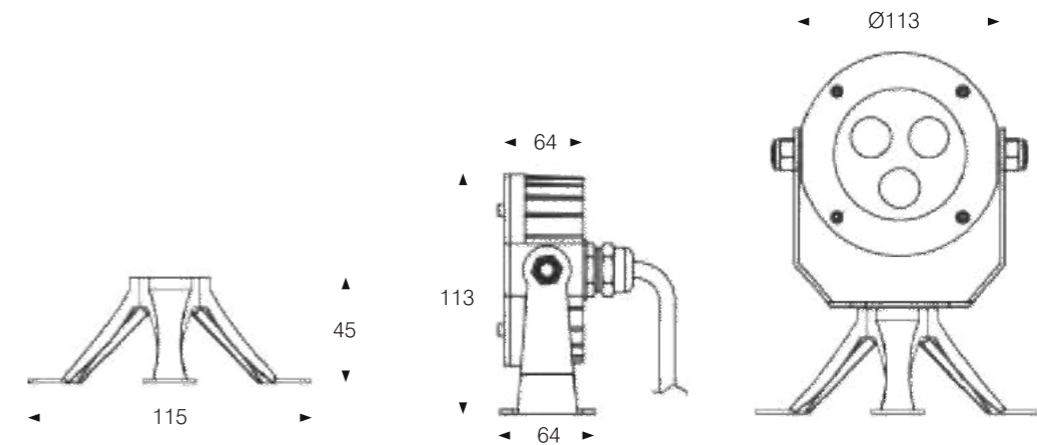


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW190-18LD
Power:	27W
Beam angle:	15°/ 30°/ 45°
Dimensions:	

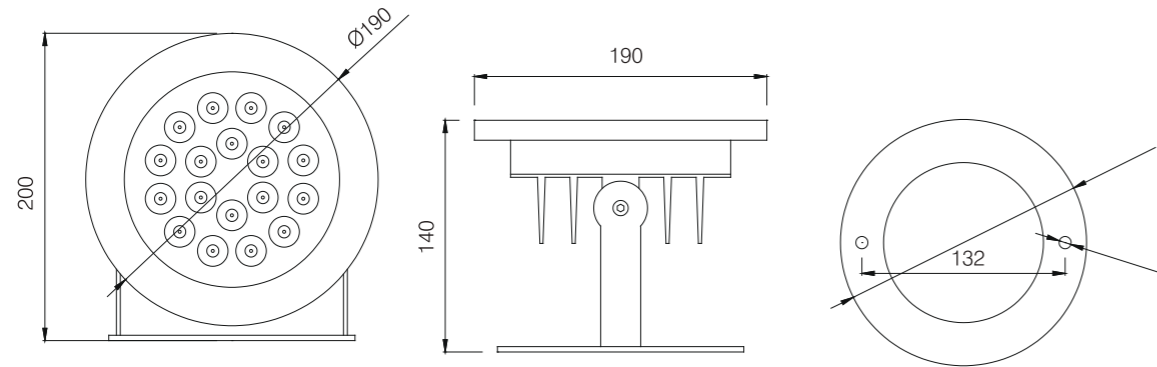


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 75
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-40°C~ +50°C

UNDERWATER LIGHT



Model:	UW230-36LD
Power:	54W
Beam angle:	15°/ 30°/ 45°
Dimensions:	

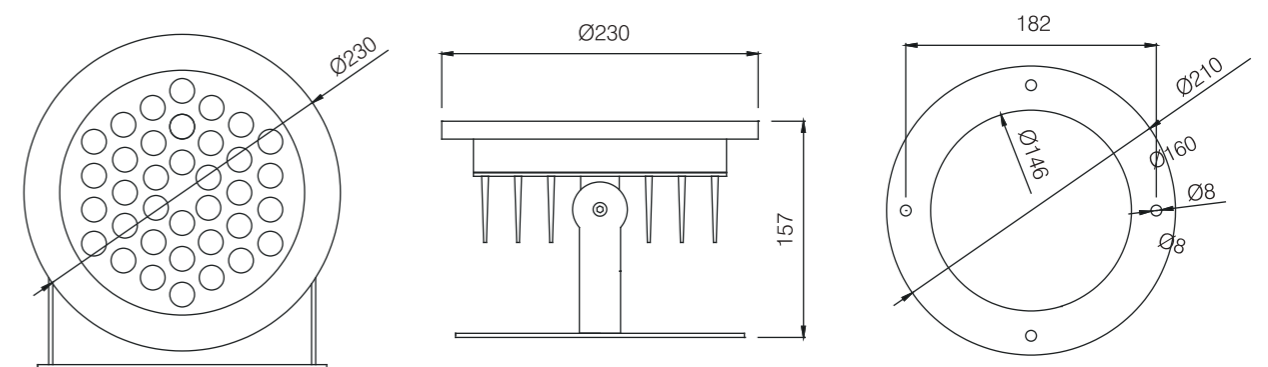


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 75
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-40°C~ +50°C

UNDERWATER LIGHT



Model:	UW224-42LT
Power:	42W
Beam angle:	15°/ 25°/ 30°/ 40°/ 60°/ 90°/ 35°x45°
Dimensions:	

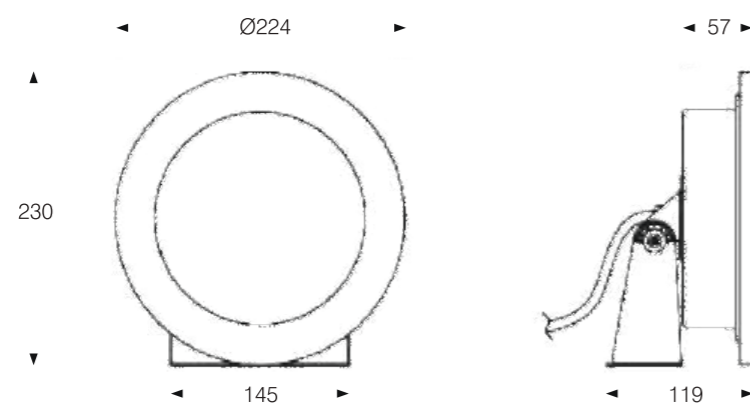


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW195-06LT	UW328-12LT
Power:	6W	12W
Beam angle:	25°/ 40°/ 60°	
Dimensions:		

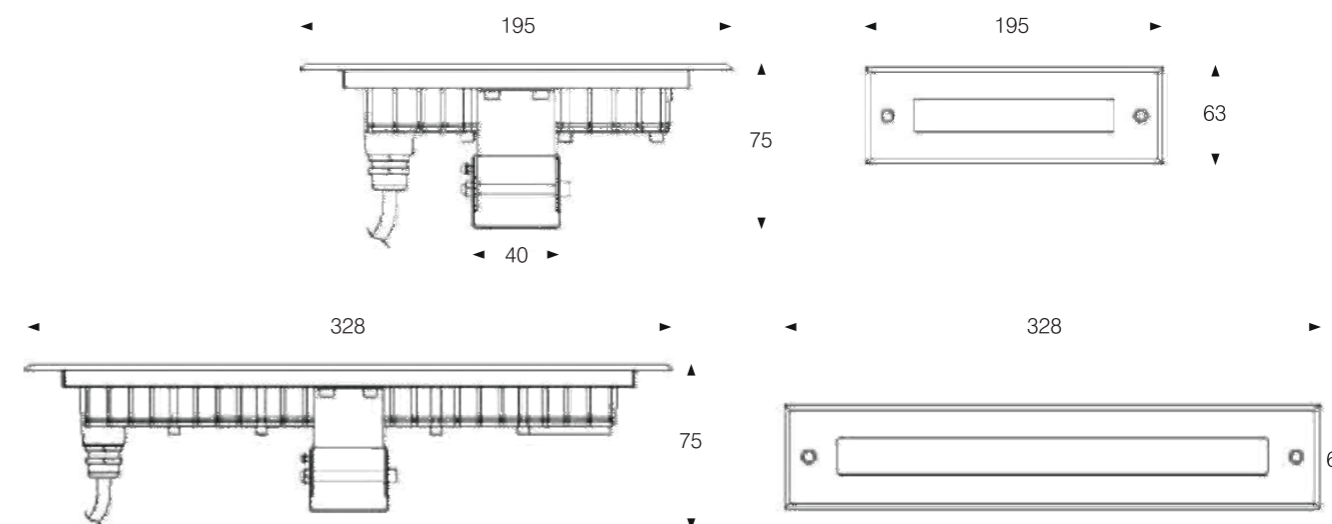



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW195-06LT	UW195-06ALT
Power:	6W	6W
Beam angle:	10°/ 20°/ 30°/ 40°/ 35°x45°	
Dimensions:		

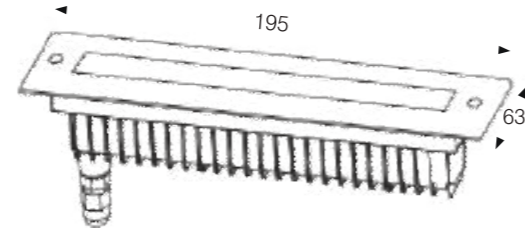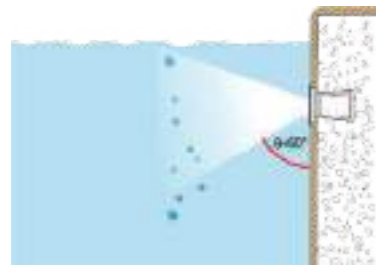


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW328-12LT	UW328-12ALT
Power:	12W	12W
Beam angle:	10°/ 20°/ 30°/ 40°/ 60°/ 35°x45°	
Dimensions:		

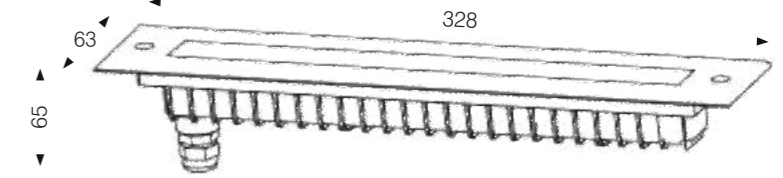


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW250-12LT
Power:	12W
Beam angle:	25°/ 45°/ 60°/ 45x35°
Dimensions:	

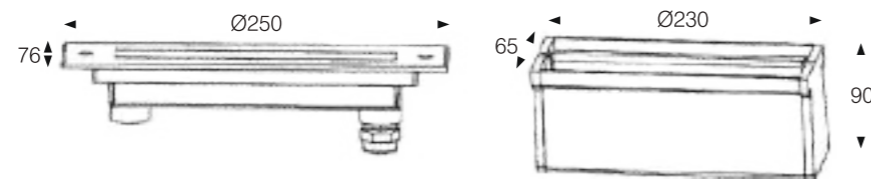



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW135-08LT	UW180-12LT	UW205-24LT	UW250-36LT
Power:	8W	12W	24W	36W
Beam angle:	24°/ 36°/ 60°			
Dimensions:				

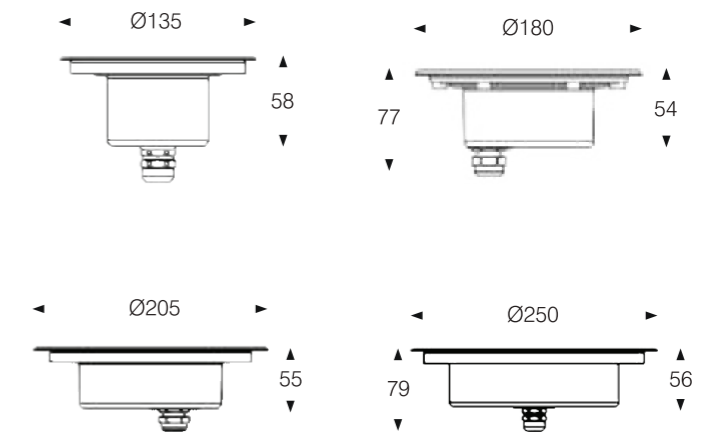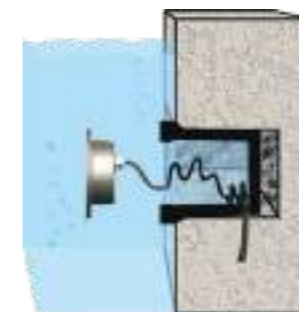


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW42-03LT
Power:	3W
Beam angle:	5°/ 10°/ 13°/ 15°/ 16°/ 25°/ 36°/ 40°/ 57°/ 60°
Dimensions:	

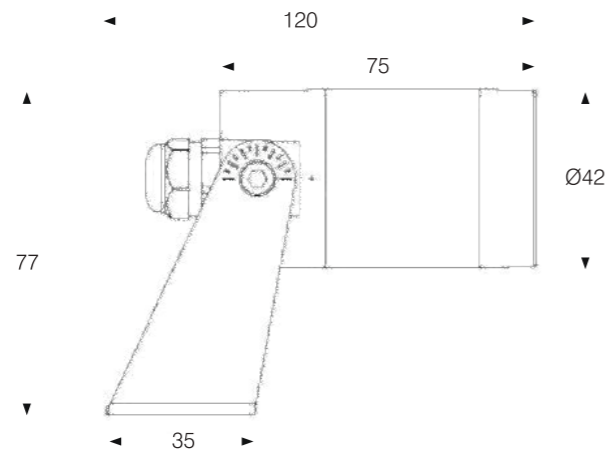


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW65-06LT
Power:	6W
Beam angle:	5°/10°/ 11°/ 13°/ 15°/ 16°/ 25°/ 36°/ 40°/ 57°/ 60°
Dimensions:	

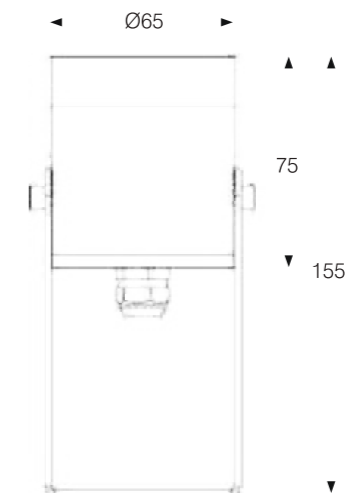


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW70-06LT	UW100-15LT	UW122-24LT
Power:	6W	15W	24W
Beam angle:	5°/ 10°/ 15°/ 25°/ 36°/ 40°/ 60°		
Dimensions:			

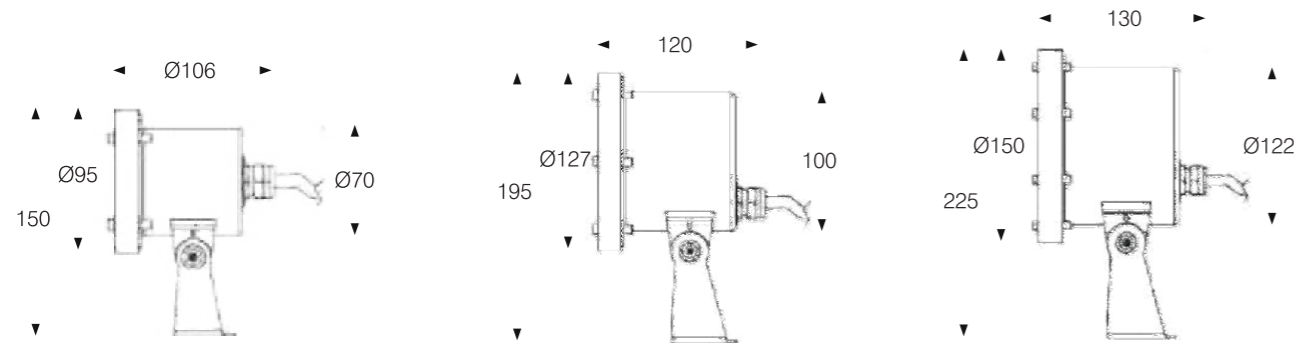


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW65-07LT	UW95-12LT	UW120-18LT
Power:	7W	12W	18W
Beam angle:	5°/ 10°/ 15°/ 25°/ 36°/ 40°/ 60°		
Dimensions:			

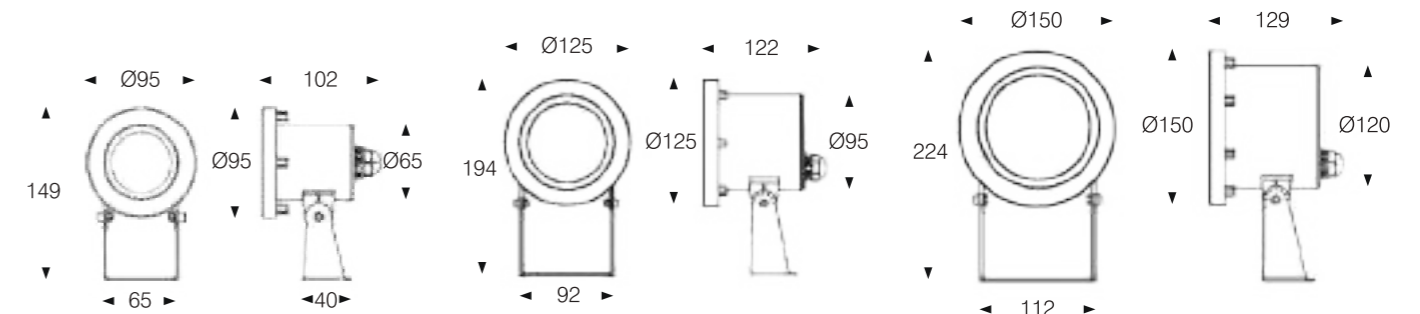


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW60-02LT
Power:	2,5W
Beam angle:	9°/ 15°/ 20°/ 30°/ 45°
Dimensions:	

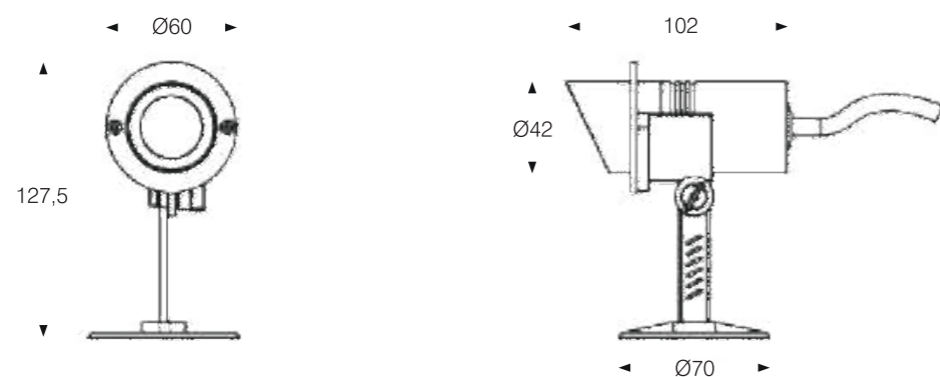


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C

UNDERWATER LIGHT



Model:	UW61-02LT
Power:	2W
Beam angle:	30°/ 40°/ 60°
Dimensions:	

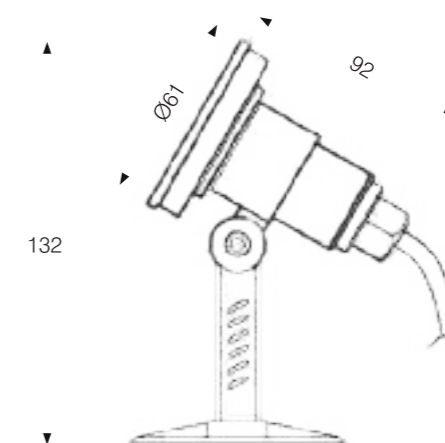

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C


INGROUND LIGHT



INGROUND LIGHT



Model:	IG5501	IG5503	IG6505
Power:	1W	3W	5W
Beam angle:	120°	28°/ 43°	
Dimensions:			

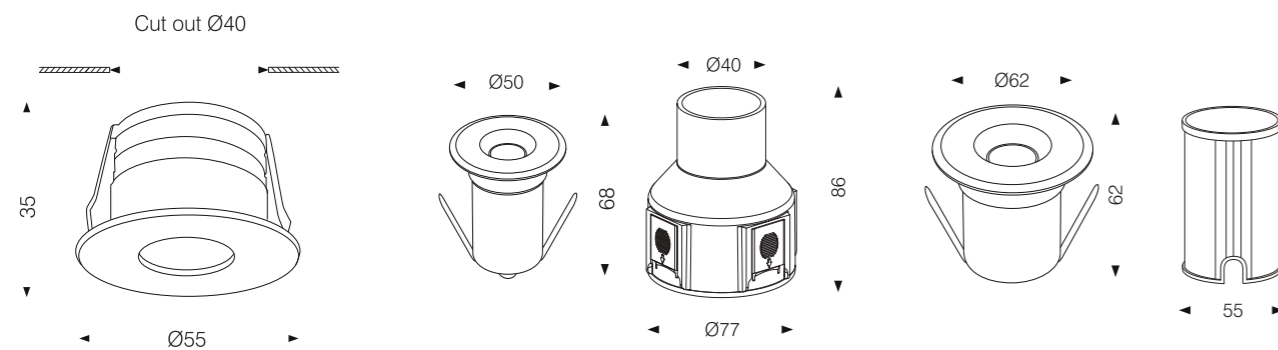


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	3000K/ 4000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb

INGROUND LIGHT



Model:	IG10-0.2LT	IG20-0.6LT	IG30-0.6LT
Power:	0,2W	0,6W	0,6W
Beam angle:	120°		
Dimensions:			

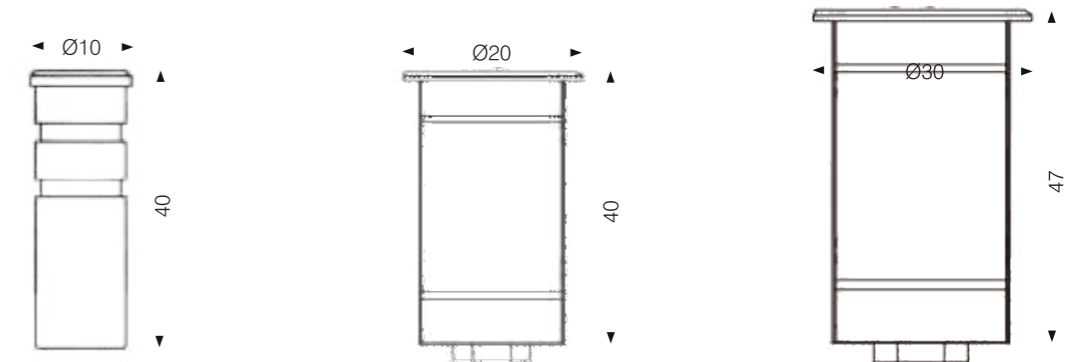


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	3000K/ 4000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb

INGROUND LIGHT



Model:	IG95-03LT
Power:	3W
Beam angle:	5°/ 10°/ 15°/ 30°/ 40°/ 60°
Dimensions:	

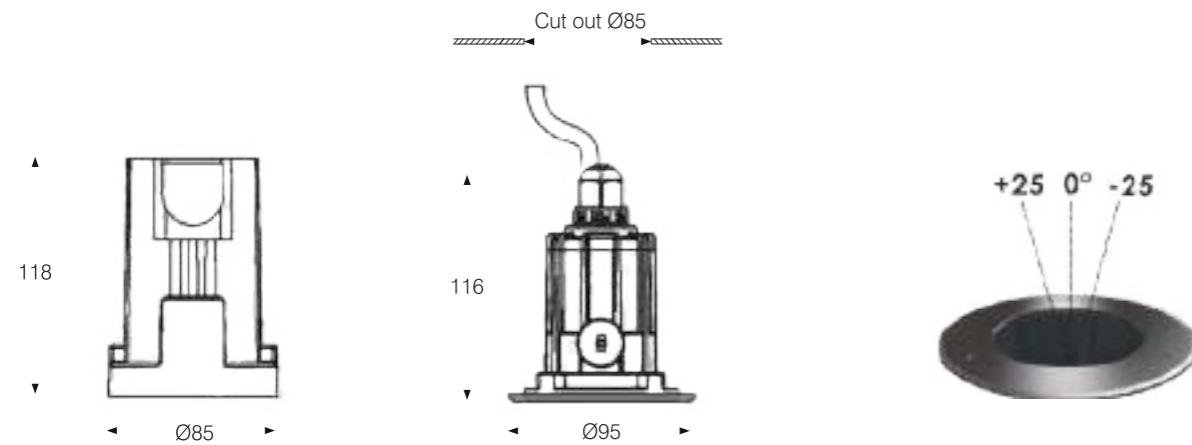


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb

INGROUND LIGHT



Model:	IG139-06LT
Power:	6W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 10x65°/ 18x20°/ 20x55°
Dimensions:	

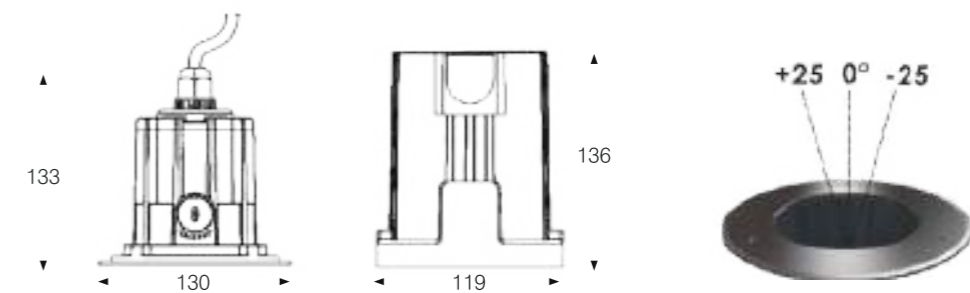


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb



Model:	IG160-12LT
Power:	12W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°/ 15x55°
Dimensions:	

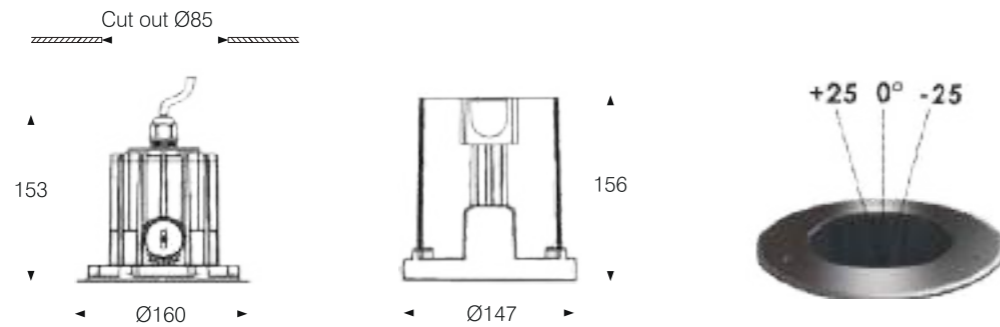


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb



Model:	IG180-18LT
Power:	18W
Beam angle:	10°/ 15°/ 30°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°
Dimensions:	

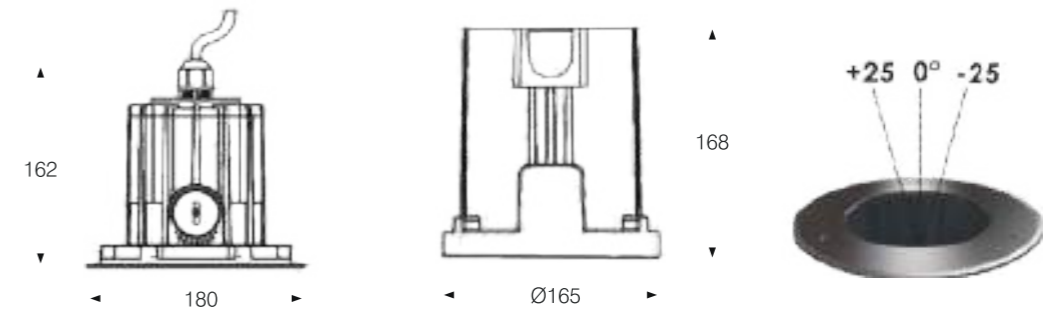


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb

INGROUND LIGHT



Model:	IG210-24LT
Power:	24W
Beam angle:	10°/ 15°/ 25°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°/ 15x55°
Dimensions:	

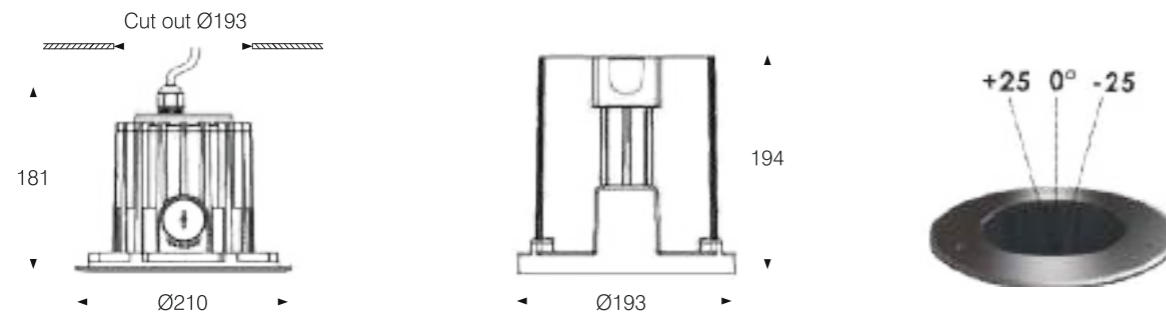


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb

INGROUND LIGHT



Model:	IG250-36LT
Power:	36W
Beam angle:	10°/ 15°/ 30°/ 40°/ 60°/ 90°/ 10x45°/ 20x65°
Dimensions:	

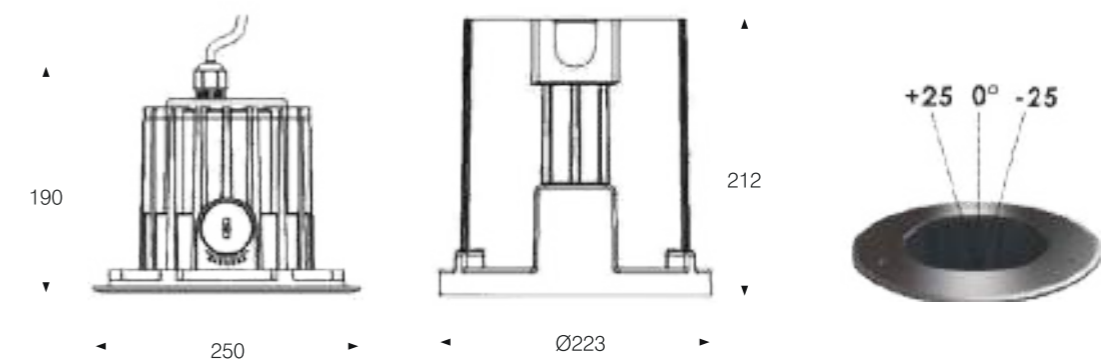


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC220V-240V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Diffuser Glass, Honeycomb



Model:	IG280-30SL	IG280-40SL
Power:	30W	40W
Beam angle:	2°/ 4,5°/ 8°/ 12°/ 30°/ 40°	
Dimensions:		

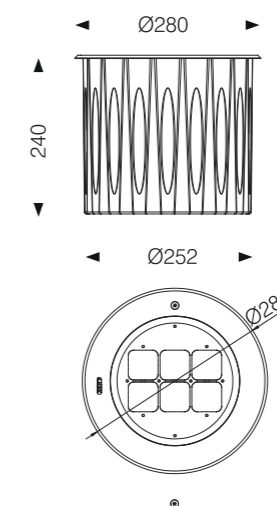


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb Grill, Anti-slip Glass



Model:	IG155-10WRL
Power:	10W
Beam angle:	20°/ 30°/ 40°/ 30x60°/ 40x85°/ 50x95°
Dimensions:	

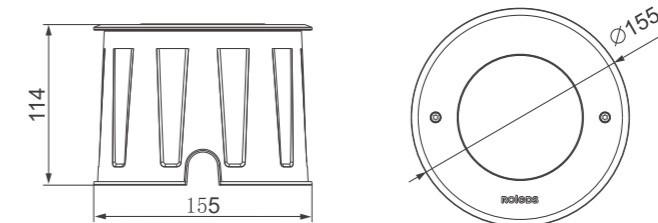


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +40°C
Accessory	Bullseyes Louvre

INGROUND LIGHT



Model:	IG200-20WRL
Power:	20W
Beam angle:	20°/ 30°/ 40°/ 35x53°/ 40x70°/ 50x95°
Dimensions:	

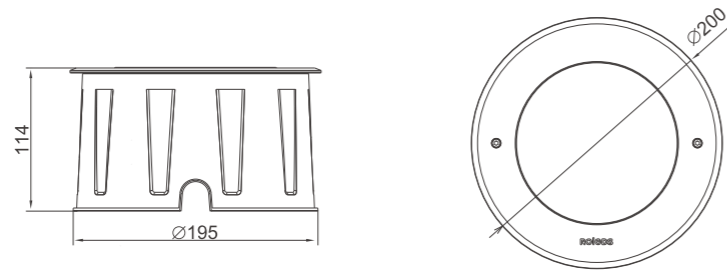


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C

INGROUND LIGHT



Model:	IG260-30WRL
Power:	30W
Beam angle:	20°/ 30°/ 40°/ 35x53°/ 40x70°/ 50x95°
Dimensions:	

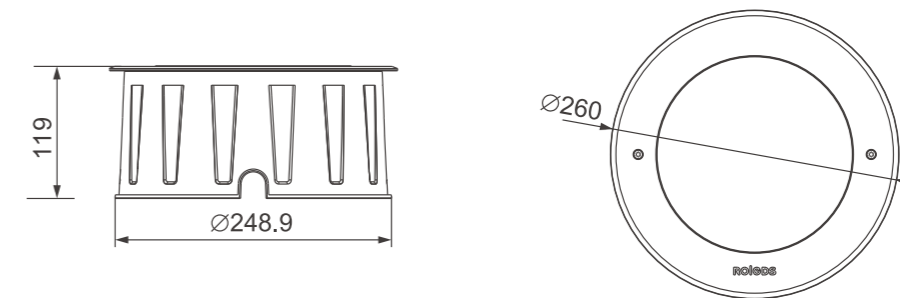


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C



Model:	IG200-18RL	IG200-24RL
Power:	18W	24W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

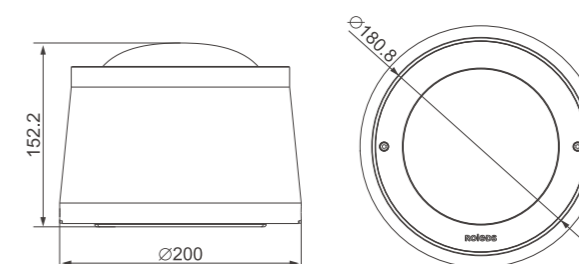


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C
Accessory	Honeycomb

INGROUND LIGHT



Model:	IG250-30RL	IG250-36LT
Power:	30W	36W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

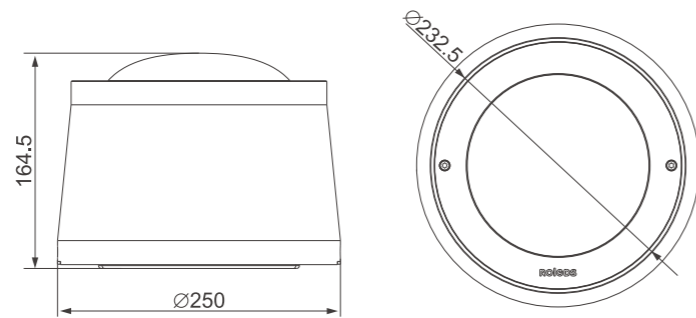


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C
Accessory	Honeycomb

INGROUND LIGHT



Model:	IG320-48RL	IG320-54LT
Power:	48W	54W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15x60°	
Dimensions:		

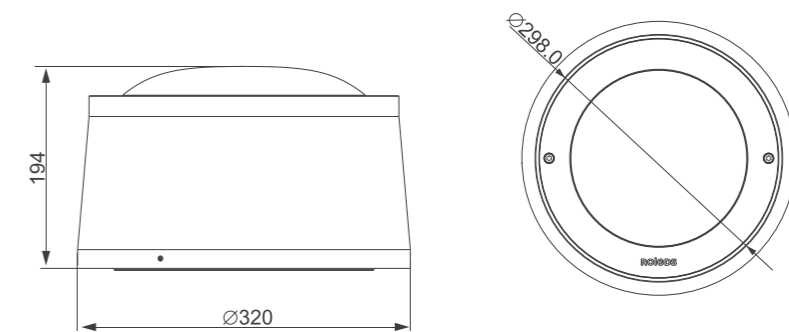

General specifications


LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C
Accessory	Honeycomb



INGROUND LIGHT



Model:	IG55-02AL
Power:	2W
Beam angle:	1 Way/ 2 Way/ 4 Way
Dimensions:	

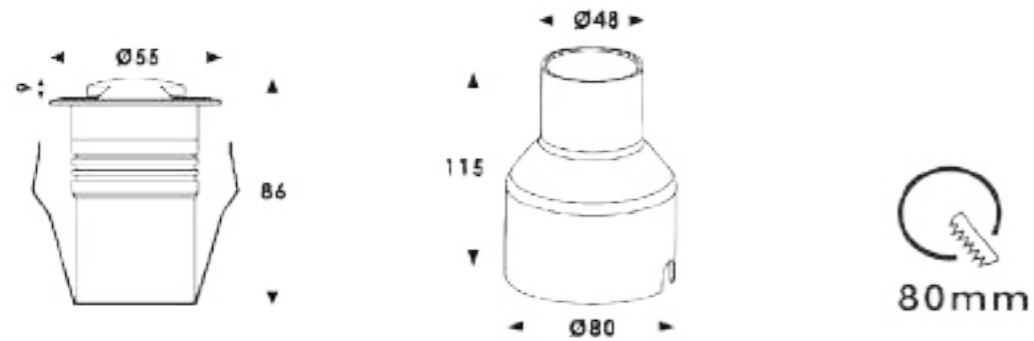


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG70-01AL	IG70-02AL
Power:	1W	2W
Beam angle:	1 Way/ 2 Way	
Dimensions:		

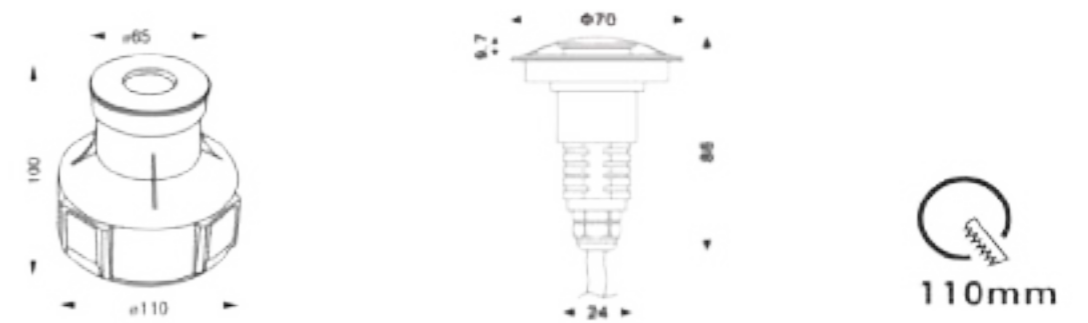


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG116-02AL
Power:	2W
Beam angle:	1 Way/ 2 Way/ 4 Way
Dimensions:	

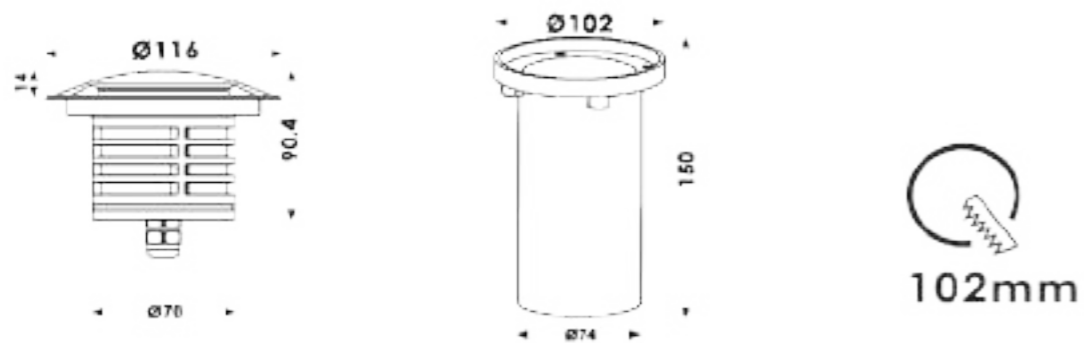


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG173-05AL	IG173-12AL
Power:	5W	12W
Beam angle:	1 Way/ 2 Way/ 4Way	
Dimensions:		

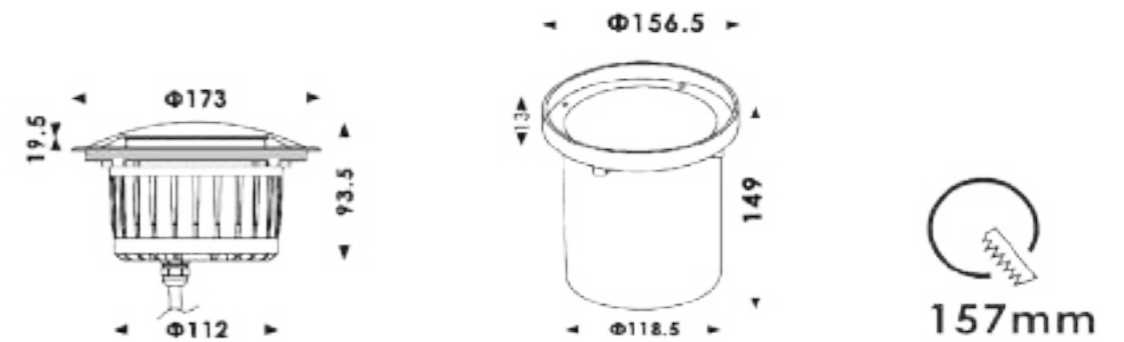


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG116-01AL	IG116-04LT	IGG116-06AL
Power:	1,6W	4W	6W
Beam angle:	1 Way/ 2 Way/ 4 Way		
Dimensions:			

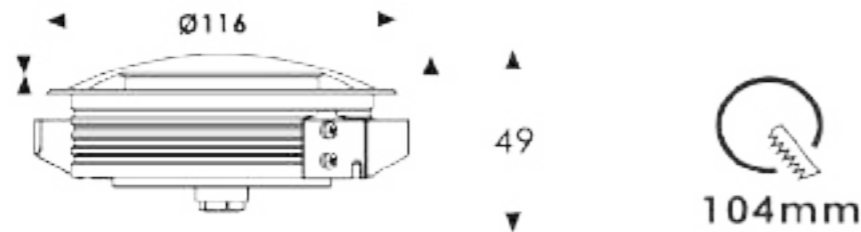


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG328-05ALT	IG328-12ALT
Power:	5W	12W
Beam angle:	1 Way/ 2 Way/ 4 Way	
Dimensions:		

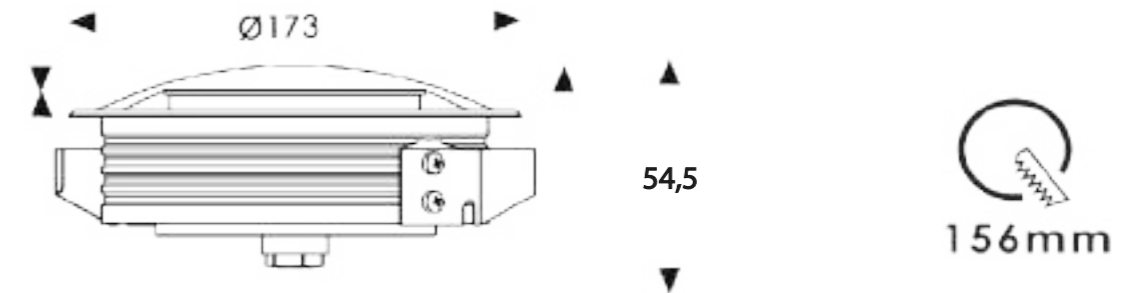

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG44-02AL	IG70-06AL
Power:	2W	6W
Beam angle:	15°/ 24°/ 40°/ 60°	20°/ 38°/ 40°

Dimensions:

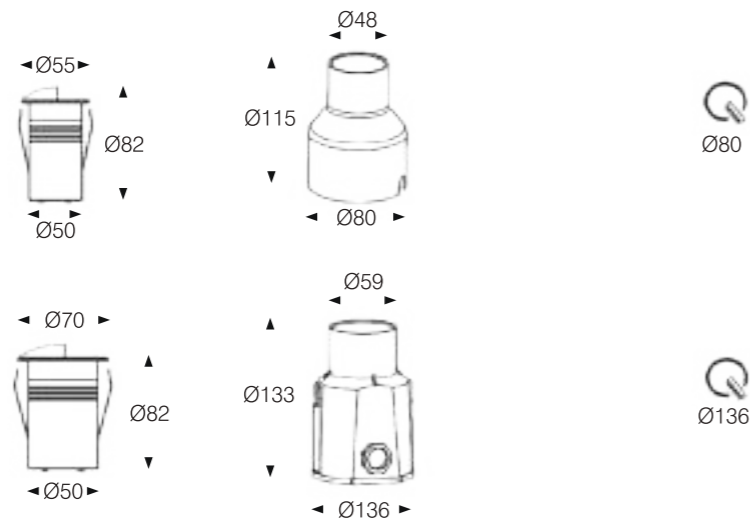

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG120-01AL	IG120-04AL	IG120-06AL
Power:	1,6W	4W	6W
Beam angle:	1 Way/ 2 Way		

Dimensions:

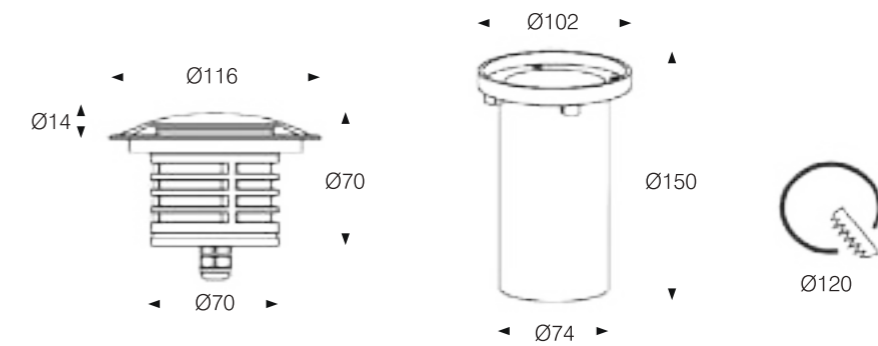

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Stainless steel 316
CCT:	2200K/ 2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	68
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C

INGROUND LIGHT



Model:	IG98-18RL	IG98-24RL	IG98-36RL
Power:	18W	24W	36W
Beam angle:	15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°		
Dimensions:			

L=1000/ 500/ 300mm

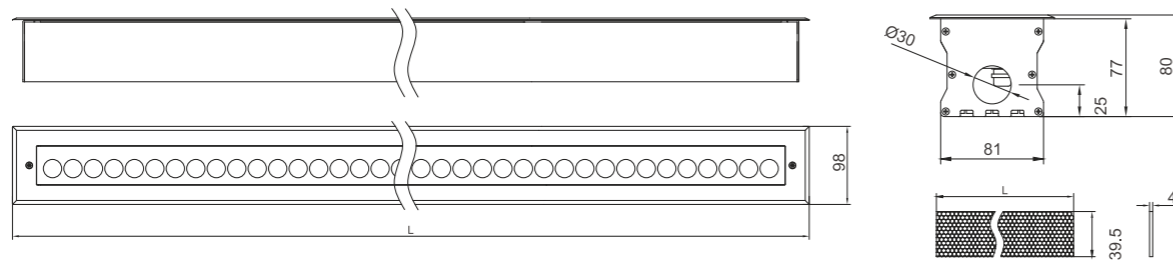


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C~ +45°C

INGROUND LIGHT



Model:	IG90-36RL	IG90-48RL
Power:	36W	48W
Beam angle:	15°/ 30°/ 45°/ 60°/ 15°x45°/ 20°x40°/ 15°x60°	
Dimensions:		

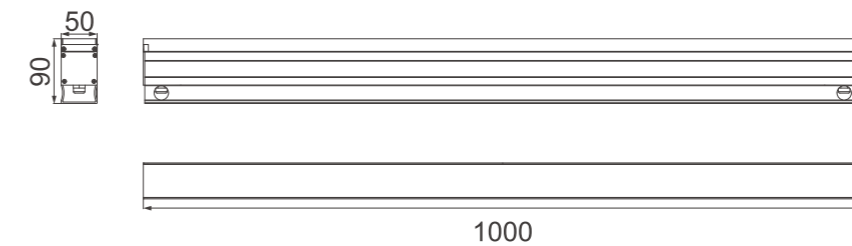


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-40°C~ +45°C
Accessory	Honeycomb, Louvre



Model:	IG30-10RL	IG30-15RL
Power:	10W	15W
Beam angle:	120°	
Dimensions:		

L=1000/ 500/ 300mm

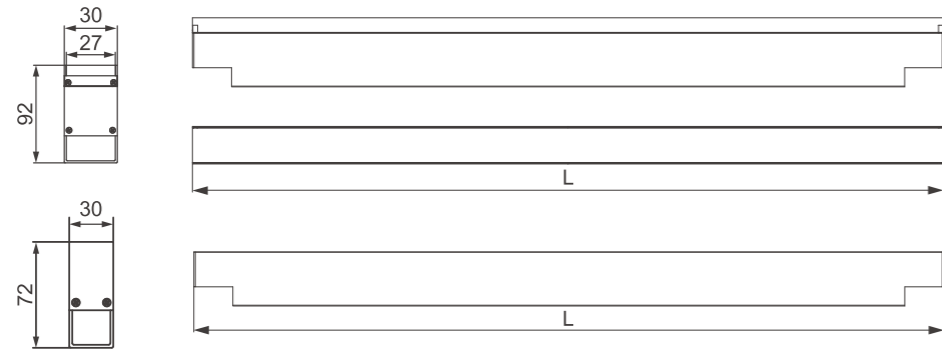


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C~ +45°C



Model:	IG50-10RL	IG50-12RL	IG50-15RL
Power:	10W	12W	15W
Beam angle:	120°		
Dimensions:			

L=1000/ 500/ 300mm

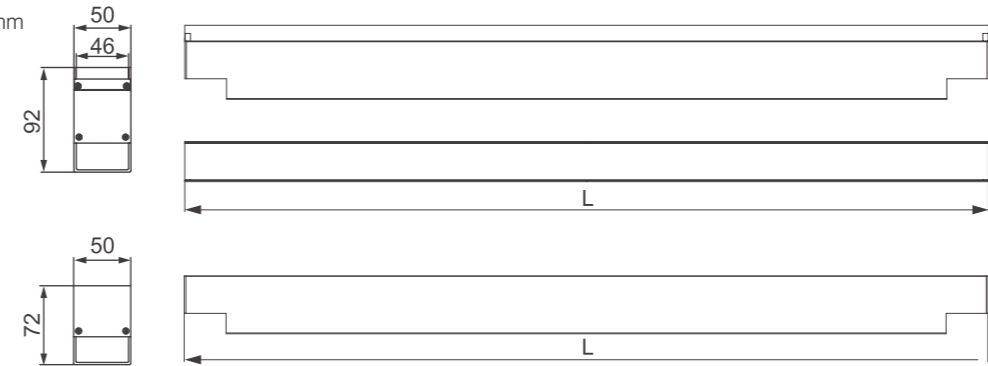


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-30°C~ +45°C



Model:	IG67-18LD	IG67-24LD	IG67-28LD
Power:	18W	24W	28W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical lens also		
Dimensions:			

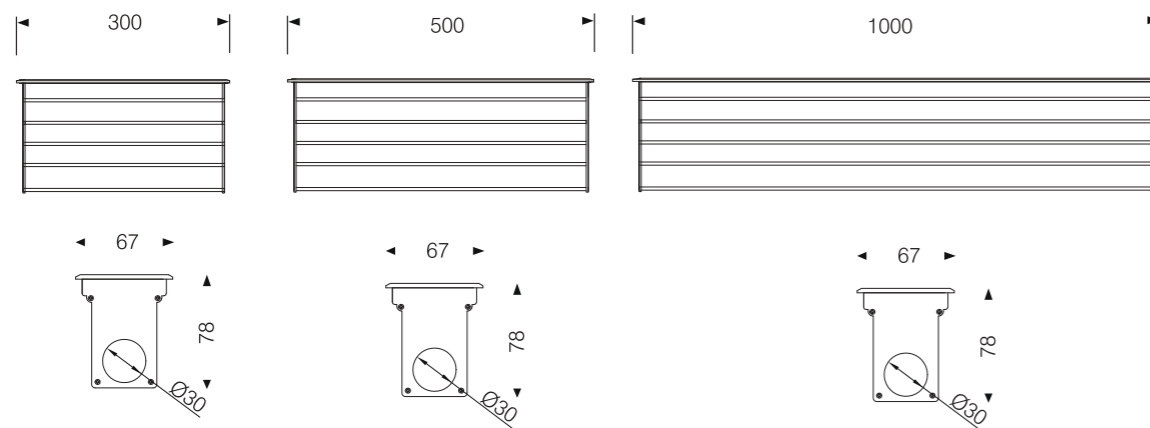


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb



Model:	IG43-18LD	IG43-24LD	IG43-28LD
Power:	18W	24W	28W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical also		
Dimensions:			

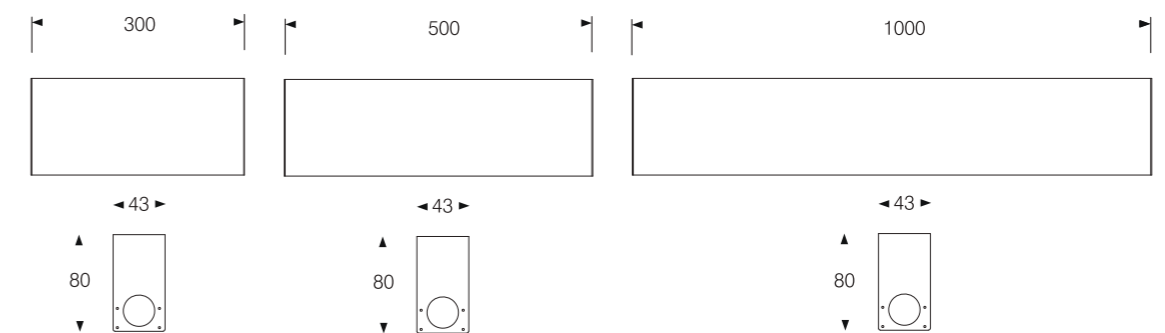

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb



INGROUND LIGHT



Model:	IG90-36LD	IG90-48LD	IG90-54LD
Power:	36W	48W	54W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°/ assymetrical lens also		
Dimensions:			

General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover, 304 or 316 stainless frame cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb




LINEAR LIGHT



Model:	LN24-12RL	LN24-14RL	LN24-15RL
Power:	12W	14W	15W
Beam angle:	30°/ 45°/ 25°x45°		
Dimensions:			

L= 1000/ 500/ 300mm

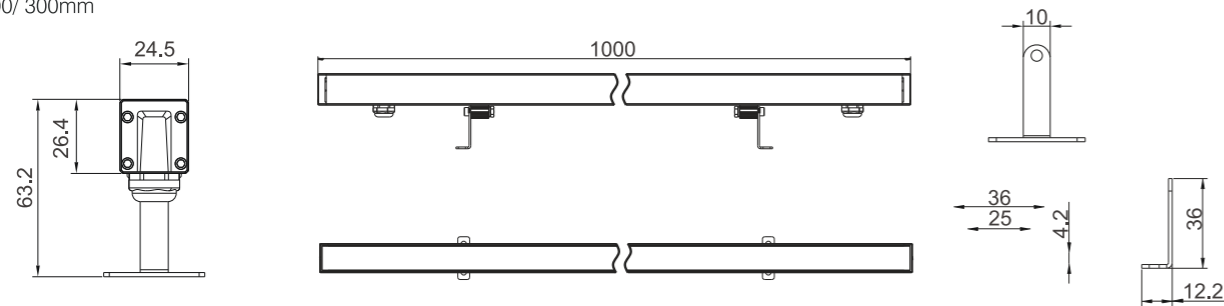

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-40°C~ +50°C
Accessory	Grille Louvre, Lightt Baffle, T-shape brackett

LINEAR LIGHT



Model:	LN33-18RL	LN33-24RL
Power:	18W	24W
Beam angle:	20°/ 30°/ 45°/ 20°x40°	
Dimensions:		

L= 1000/ 500/ 300mm

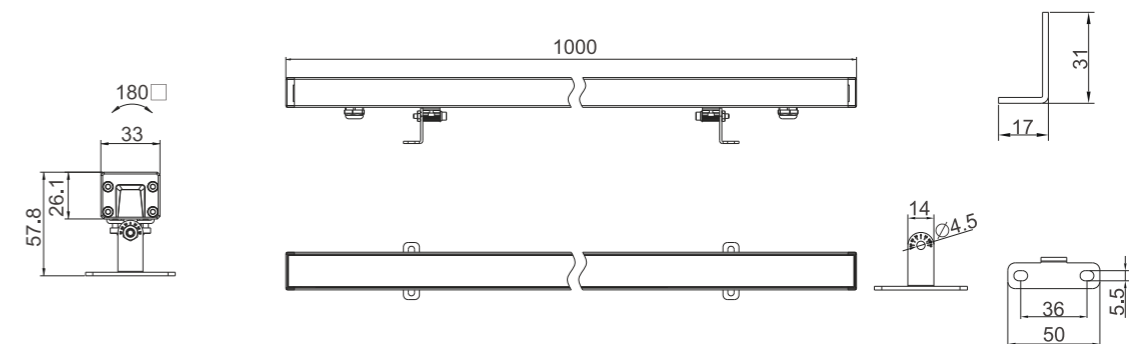

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC24V
Operating temperature:	-40°C~ +55°C
Accessory	Grille Louvre, Light Baffle, Semicirle Bullseye Louvre, T-shape bracket



Model:	LN38-24RL	LN38-36RL	LN38-48RL
Power:	24W	36W	48W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°		

Dimensions:

L=1000/ 500/ 300mm

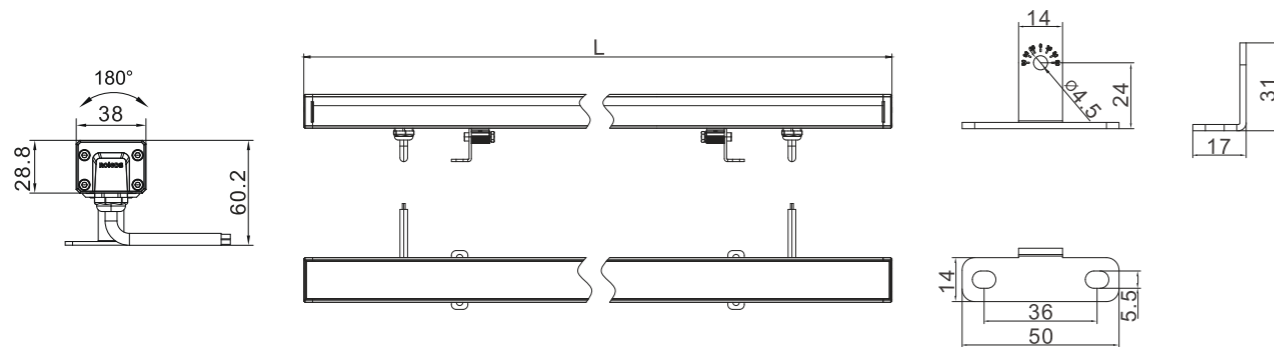

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW/ BICOLOR
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512, DMX 8Pixel...
Voltage:	DC24V
Operating temperature:	-40°C~+50°C
Accessory	Grille Louvre, Light Baffle, T-shape bracket



Model:	LN65-48RL	LN65-60RL
Power:	48W	60W
Beam angle:	7°/ 15°/ 22°/ 30°/ 45°/ 60°/ 15°x60°/ 20°x40°	

Dimensions:

L=1000/ 500/ 300mm

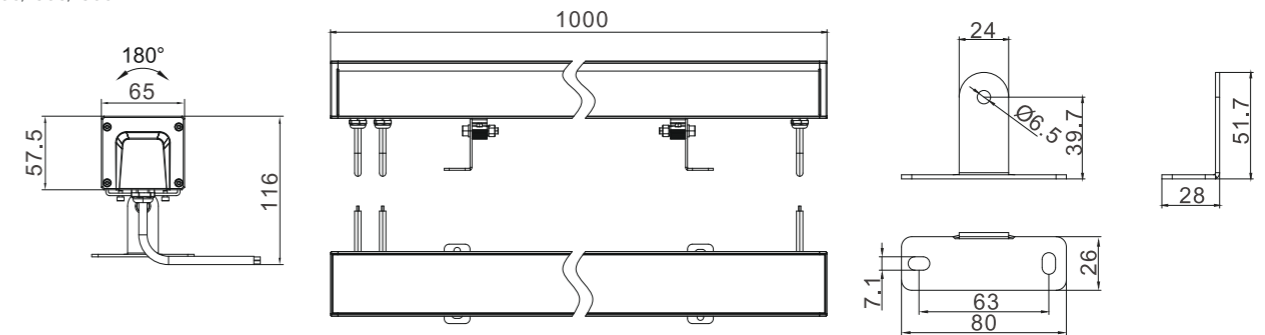


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW/ 5in1/ 7in1
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512, DMX 1Pixel...
Voltage:	AC100-240V
Operating temperature:	-40°C~+55°C
Accessory	Grille Louvre, Light Baffle, T-shape bracket

LINEAR LIGHT




Model:	LN22-12RL	LN22-15RL
Power:	12W	15W
Beam angle:	30°/ 45°/ 25°x45°	
Dimensions:		

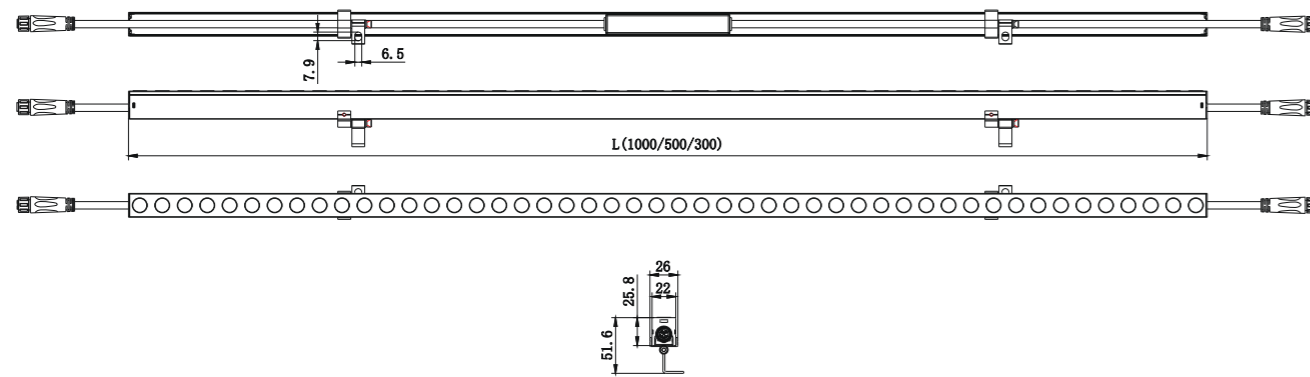


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-Glare Baffle, Clip bracket, T-shape bracket

LINEAR LIGHT

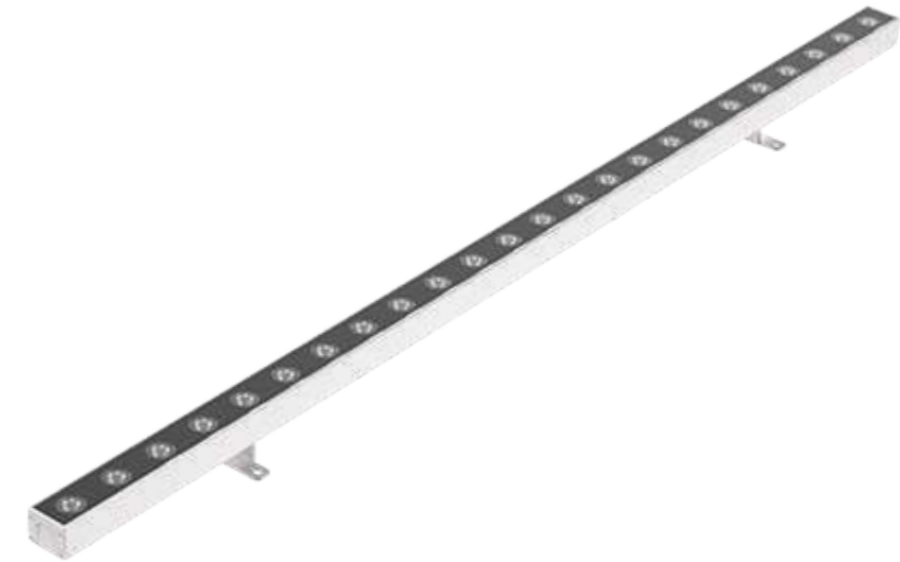


Model:	LN30-24RL
Power:	24W
Beam angle:	20°/ 30°/ 45°/ 60°/ 20°x40°
Dimensions:	

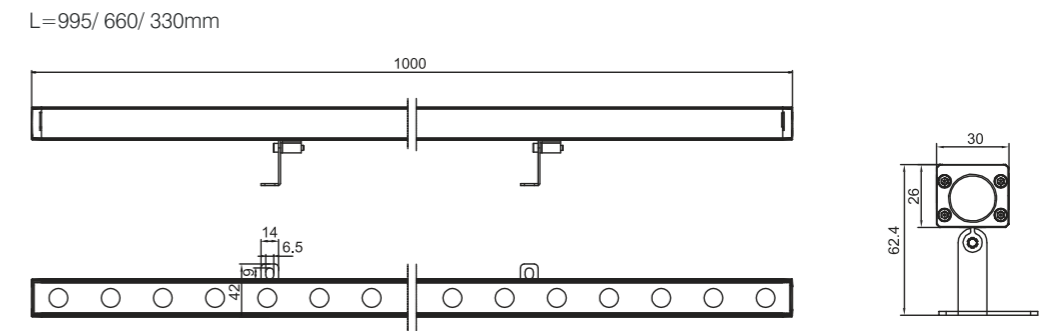


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-Glare Baffle, T-shape bracket

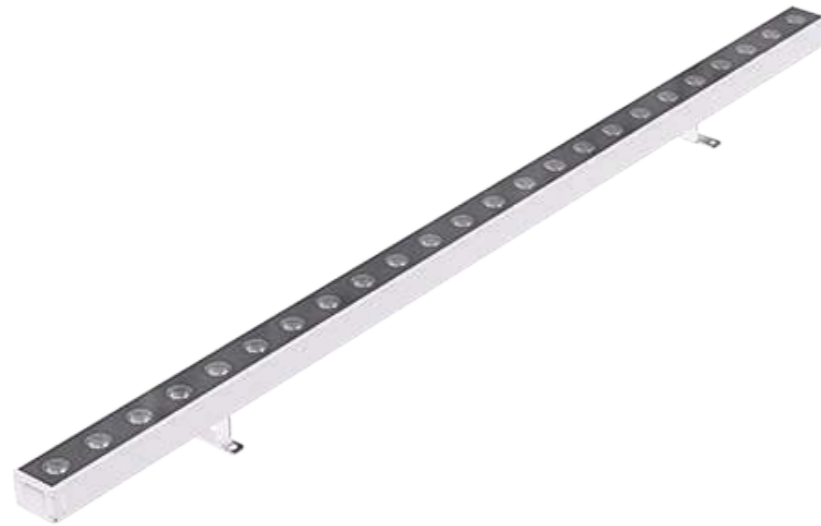

Model:	LN42-36RL	LN42-48RL
Power:	36W	48W
Beam angle:	15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°	
Dimensions:		

L=995/ 660/ 330mm

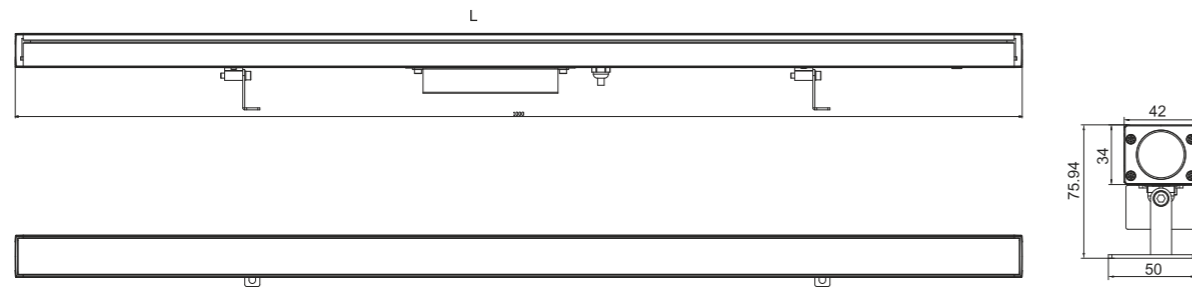


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-Glare Baffle, T-shape bracket



Model:	LN56-60RL	LN56-72RL
Power:	60W	72W
Beam angle:	8°/ 15°/ 30°/ 45°/ 60°/ 20°x40°/ 15°x60°	
Dimensions:		

L=995/ 660/ 330mm

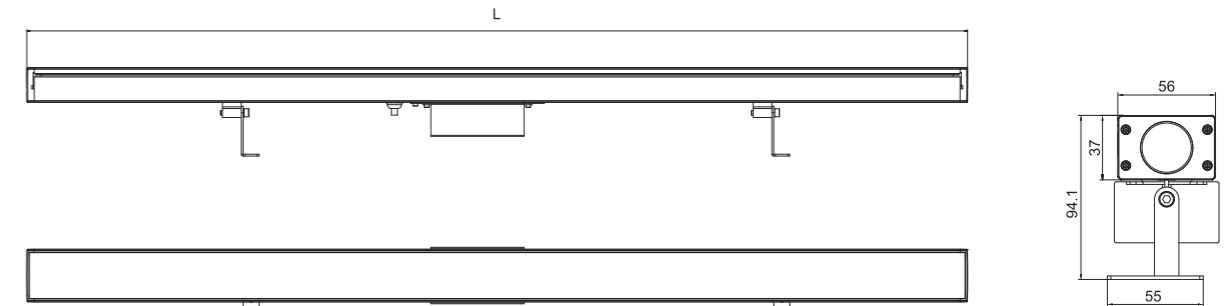

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Anti-Glare Baffle, T-shape bracket



Model:	LN66-60RL	LN66-72RL
Power:	60W	72W
Beam angle:	3,5°/ 8°/ 15°/ 30°	

Dimensions:

L=1000/ 500/ 300mm

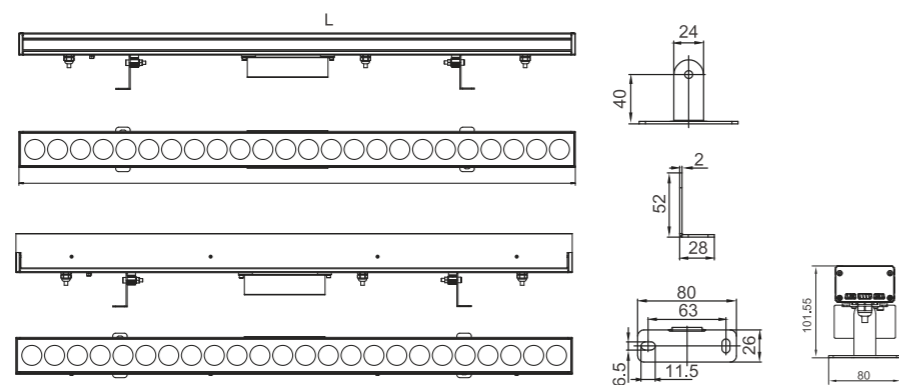

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-220V/ AC220V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-Glare Baffle, T-shape bracket



Model:	LN90-120RL
Power:	120W
Beam angle:	7°/ 15°/ 30°/ 45°/ 60°/ 20°x45°/ 15°x60°

Dimensions:

L=1000/ 500/ 300mm

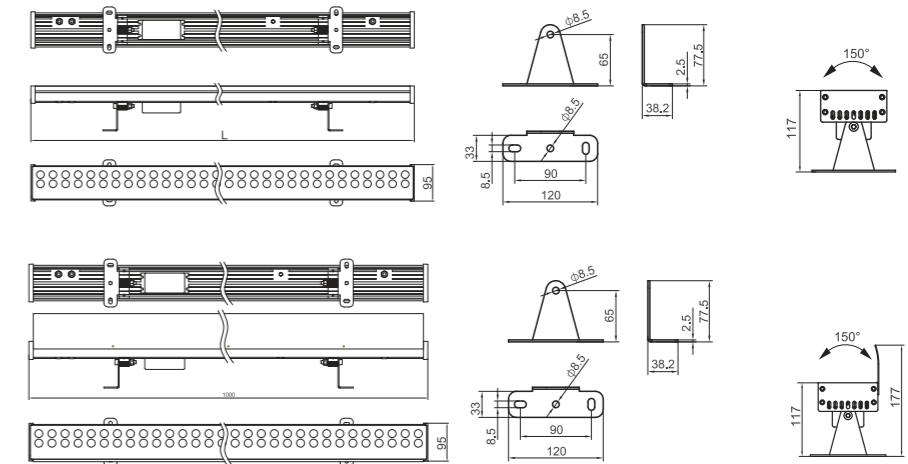


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	T-shape bracket



Model:	LN100-120RL	LN100-150RL
Power:	120W	150W
Beam angle:	3,5°/ 8°/ 15°/ 30°	
Dimensions:		

L=1000/ 500/ 300mm

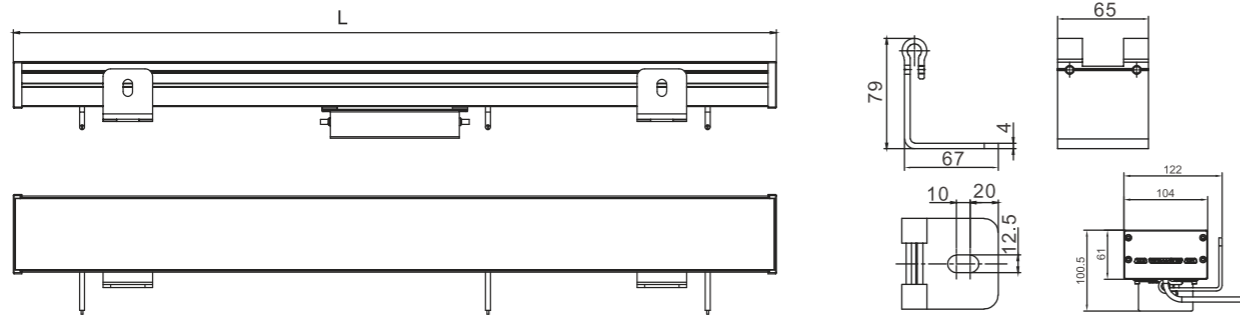


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C~ +45°C
Accessory	Anti-Glare Baffle, T-shape bracket



Model:	LN15-48RL
Power:	48W
Beam angle:	120°
Dimensions:	

L=1000/ 500/ 300mm

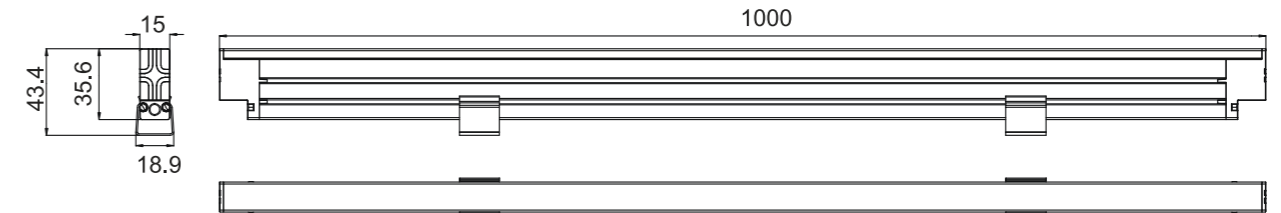


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-40°C~ +45°C



Model:	LN23-15RL
Power:	15W
Beam angle:	45°/ 60°/ 120°

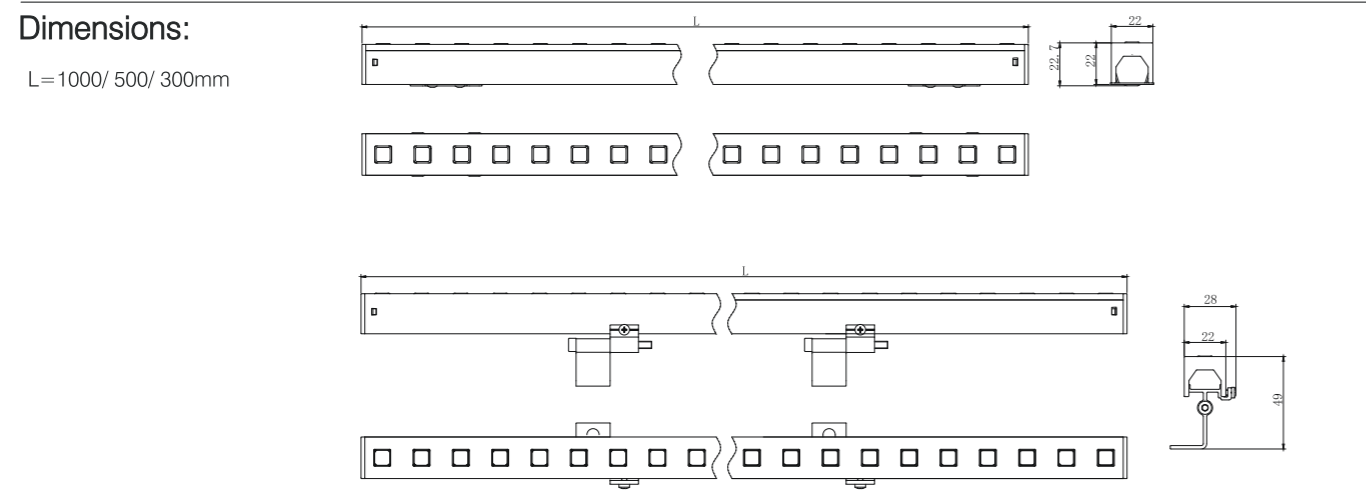


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6000K/ RGB/ RGBW
IP rating:	67
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-40°C ~ +45°C



Model:	LN25-12RL	LN25-15RL
Power:	12W	15W
Beam angle:	120°	

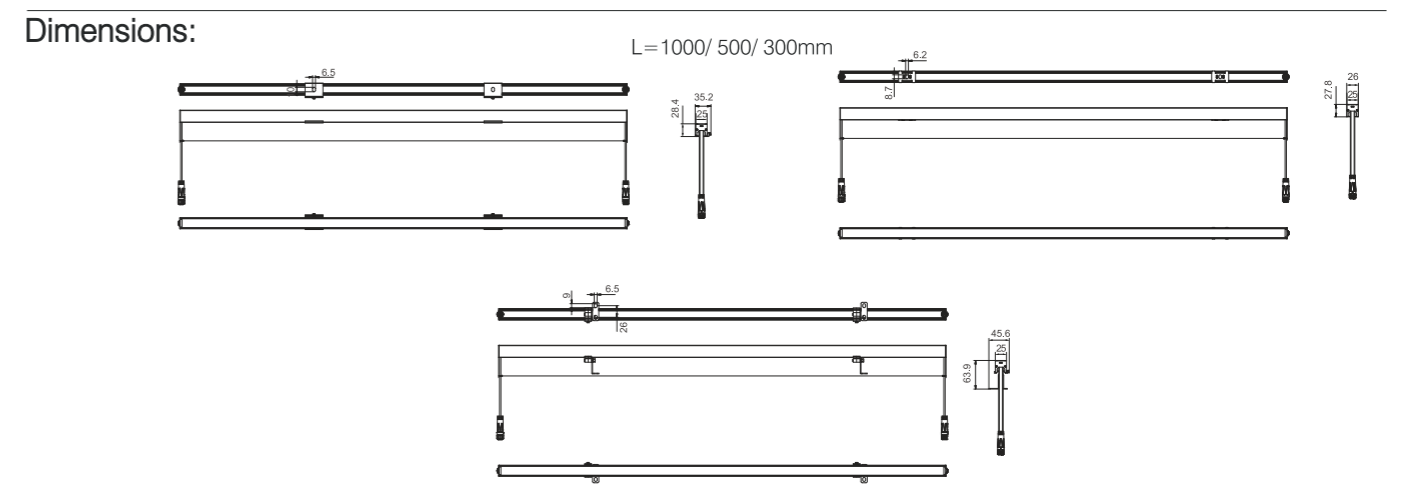


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-30°C ~ +50°C



Model:	LN22-12LD
Power:	12W
Beam angle:	120°

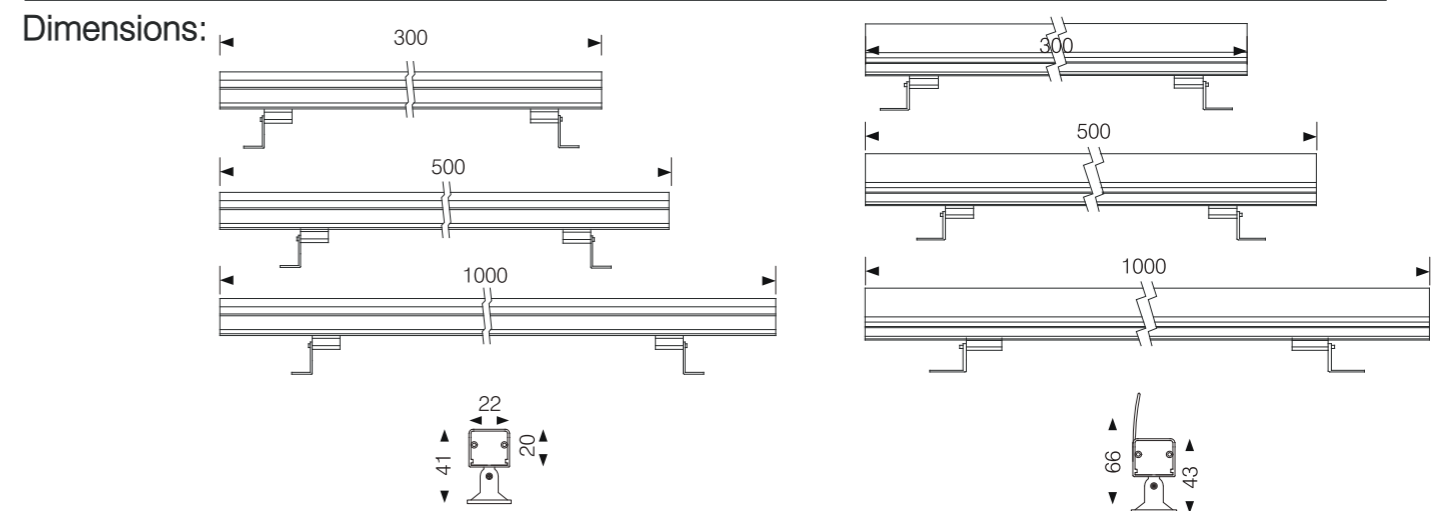


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

LINEAR LIGHT



Model:	LN32-12LD
Power:	12W
Beam angle:	25°/ 45°/ 60°
Dimensions:	

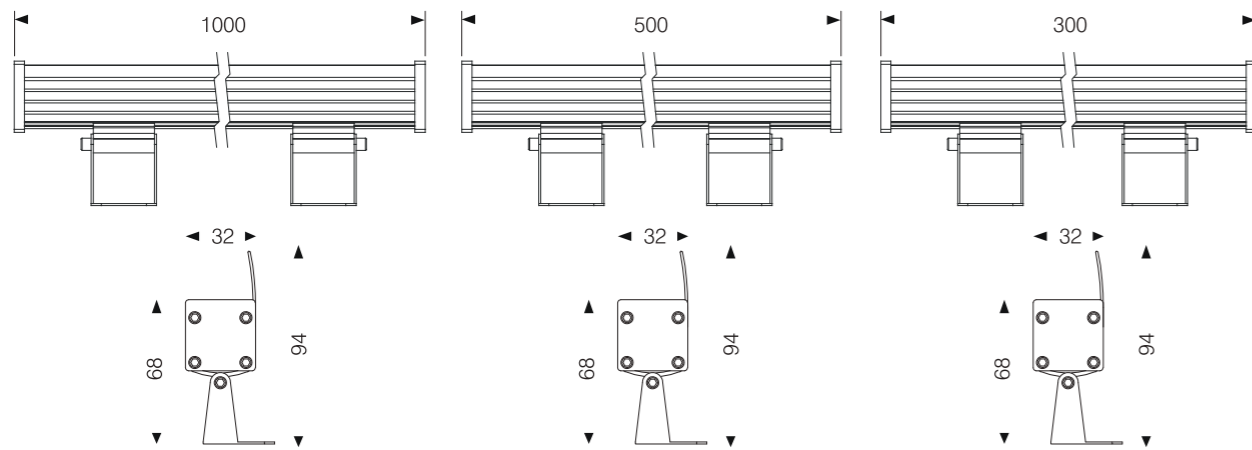


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

LINEAR LIGHT



Model:	LN26-12LD
Power:	12W
Beam angle:	25°/ 45°/ 60°
Dimensions:	

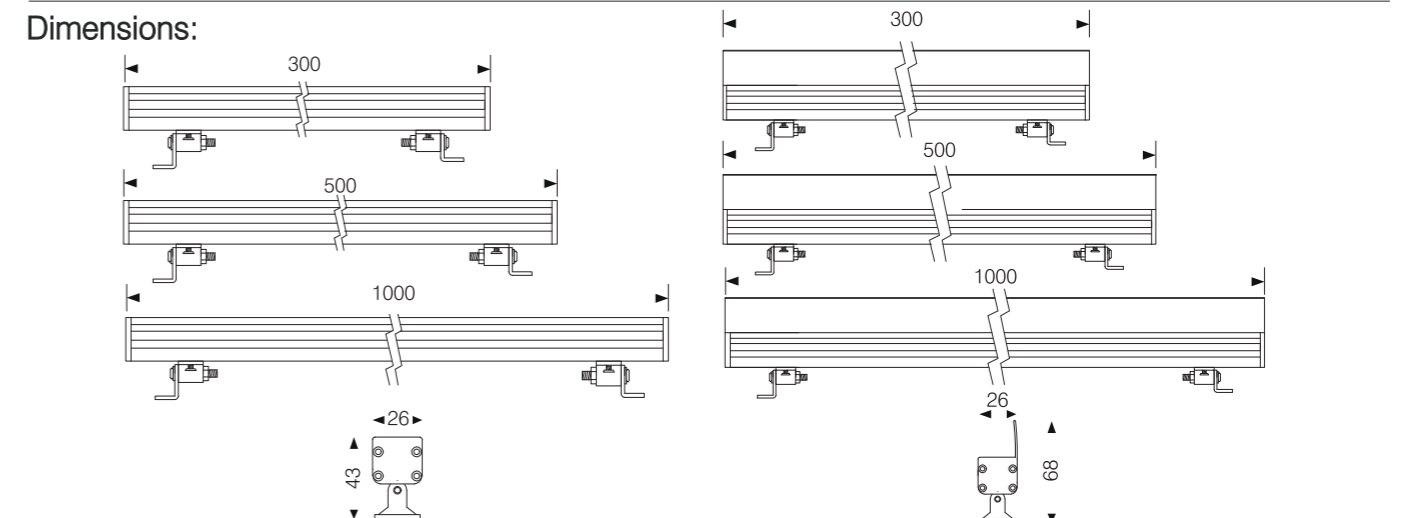


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb



Model:	LN34-18LD
Power:	18W
Beam angle:	15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

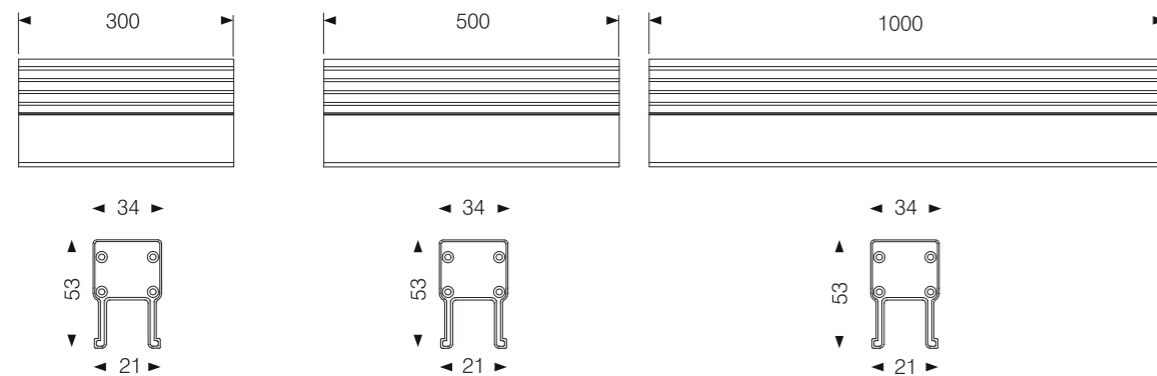


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb



Model:	LN39-24LD
Power:	24W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

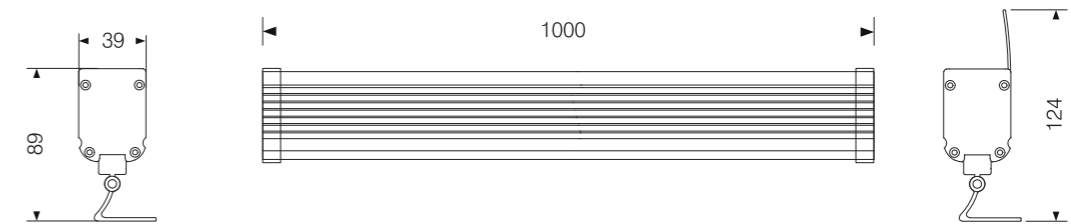


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb



Model:	LN75-48LD
Power:	48W
Beam angle:	8°/ 15°/ 25°/ 40°/ 60°/ 15°x45°/ 10°x60°
Dimensions:	

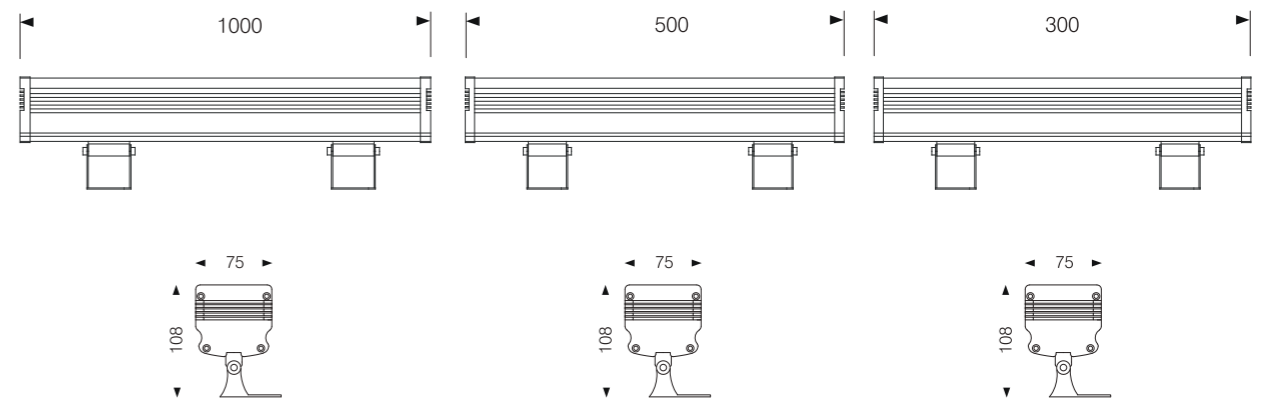

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb

LINEAR LIGHT



Model:	LN23-19LT
Power:	19W
Beam angle:	20°/ 30°/ 40°/ 55°/ 20°x30°
Dimensions:	




General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC24V
Operating temperature:	-20°C~ +50°C

LINEAR LIGHT



Model:	LN38-11LT	LN38-22LT	LN38-33LT	LN38-45LT	LN38-90LT
Power:	11W	22W	33W	45W	90W
Beam angle:	15°/ 20°/ 20°x40°/ 20°x50°				
Dimensions:					

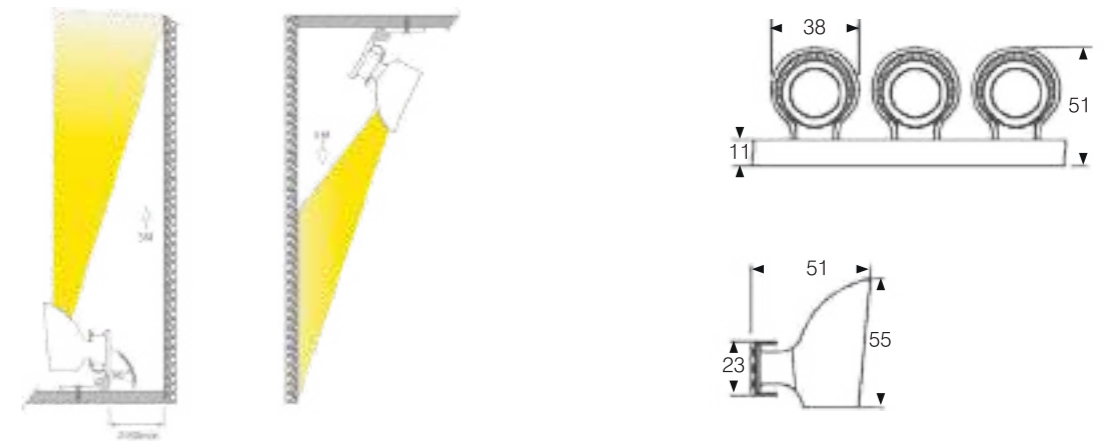

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	67
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC24V
Operating temperature:	-20°C~ +50°C



GARDEN LIGHT



Model:	GD110-15LD	GD110-30LD
Power::	15W	30W
Beam angle:	24°/ 38°/ 60°	
Dimensions:		

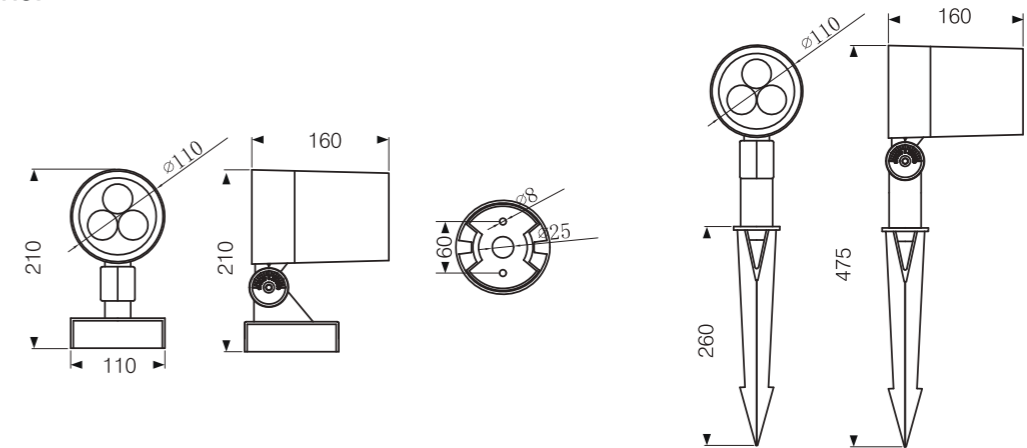


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb




Model:	GD85-07LD	GD85-10LD	GD85-12LD
Power:	7W	10W	12W
Beam angle:	24° / 38° / 60°		
Dimensions:			

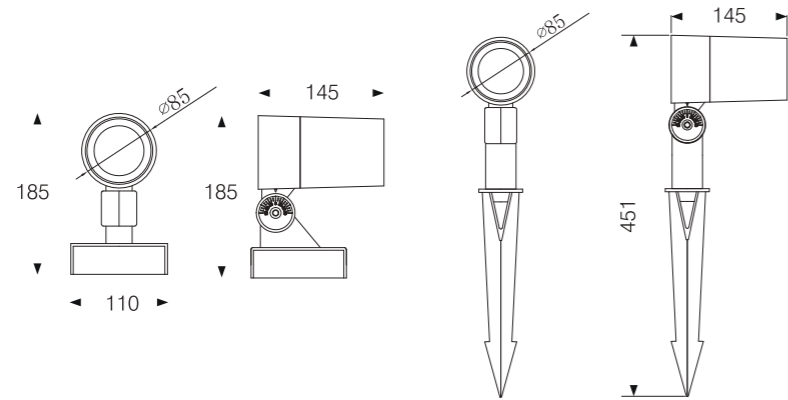


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

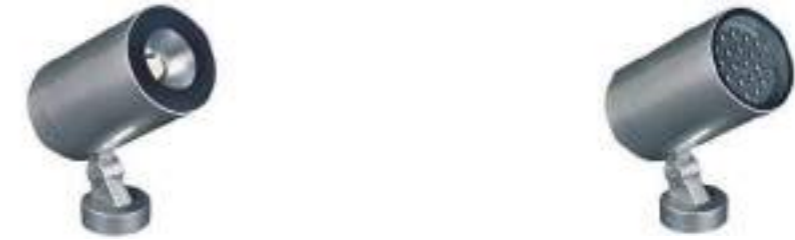

Model:	GD170-40LD	GD170-50LD
Power:	40W	50W
Beam angle:	24° / 25° / 38° / 60°	
Dimensions:		

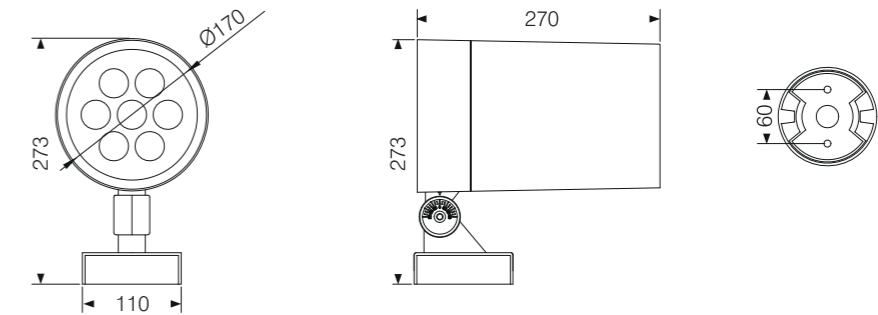


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB./ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb



Model:	RF5010
Power:	10W
Beam angle:	5,5°/ 12°/ 20°/ 30°/ 10X70°/ 5X20°
Dimensions:	

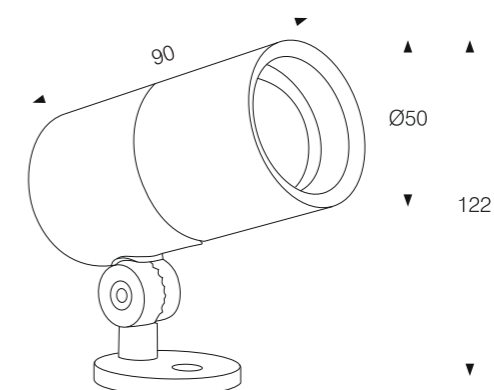

General specifications


LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb



GARDEN LIGHT




Model:	GD2603	GD5006
Power:	3W	6W
Beam angle:	5,5°/ 12°/ 20°/ 30°/ 10X70°/ 5X20°	
Dimensions:		

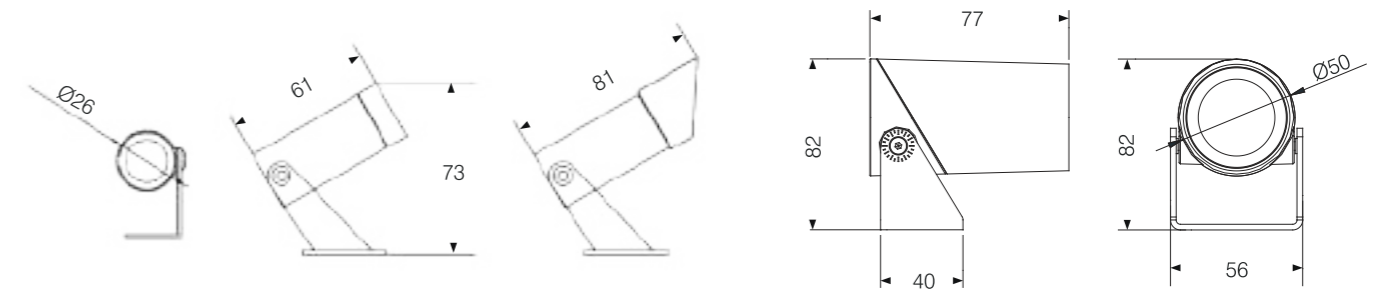


General specifications

LED:	Osram/ Cree
CRI(Ra):	>85
Material:	Die - casting aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Hood, Spike, Honeycomb

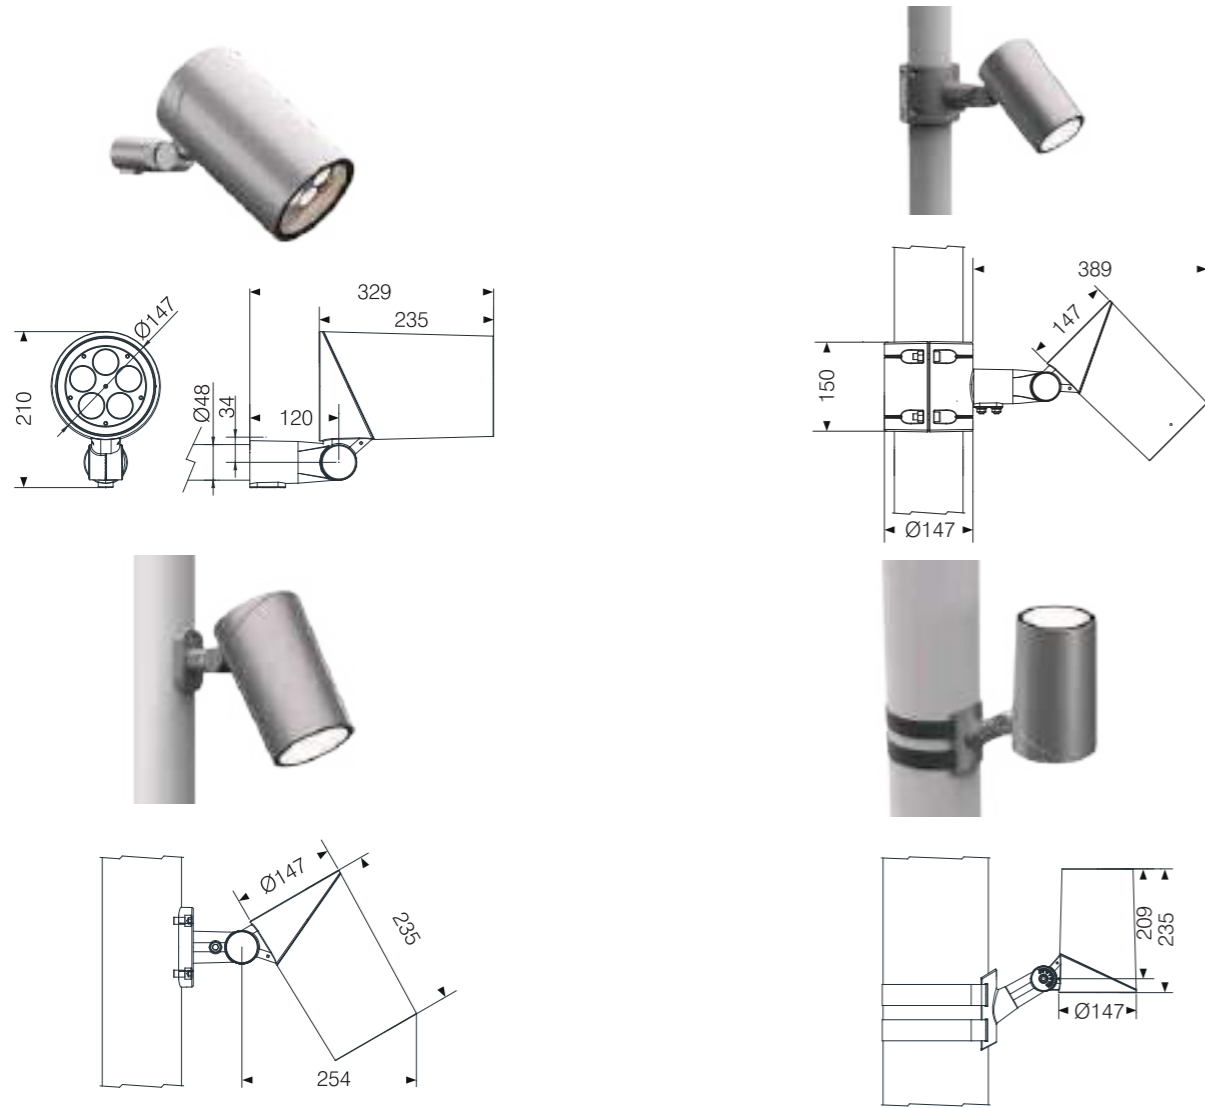

Model:	GD147-45SL	GD147-50SL
Power:	45W	50W
Beam angle:	2,5°/ 6°/ 12°/ 20°/ 30°/ 40°/ 60°/ 10x70°/ 5x20°	

Dimensions:

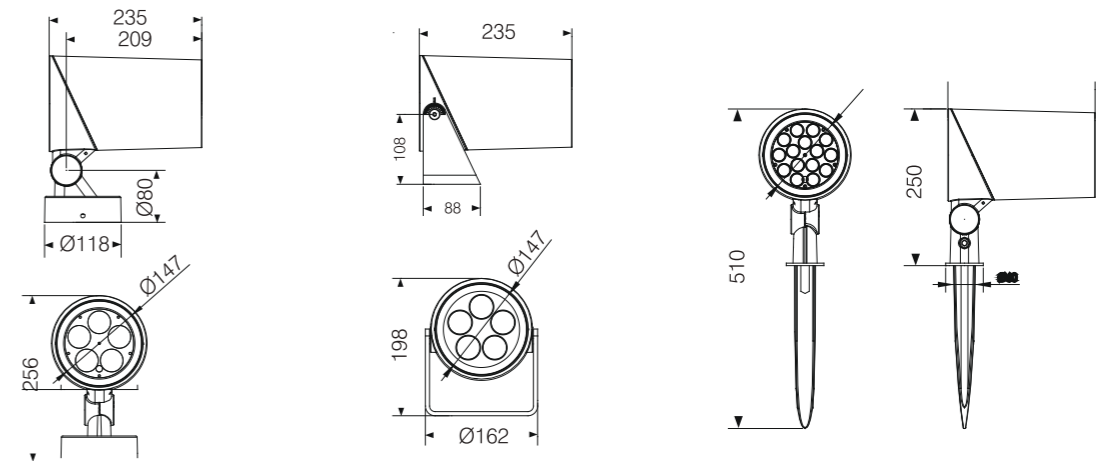

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC, DMX512
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C
Accessory	Hood, Spike, Honeycomb




GARDEN LIGHT




Model:	GD5404-01AL	GD5406-03AL	GD5406-01AL	GD5409-03AL	GD5412-03AL
Power::	4W	3x2W	6W	3x3W	3x4W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°	25°/ 40°/ 60°

Dimensions:

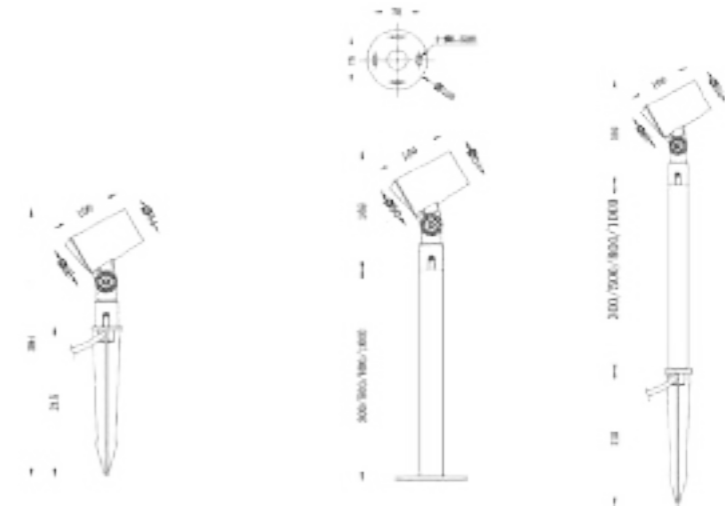

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50,000h
Control:	Triac/ PWM/ 0-10V/ Dali/ DMX512
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +40°C
Accessory	Filter, Honeycomb

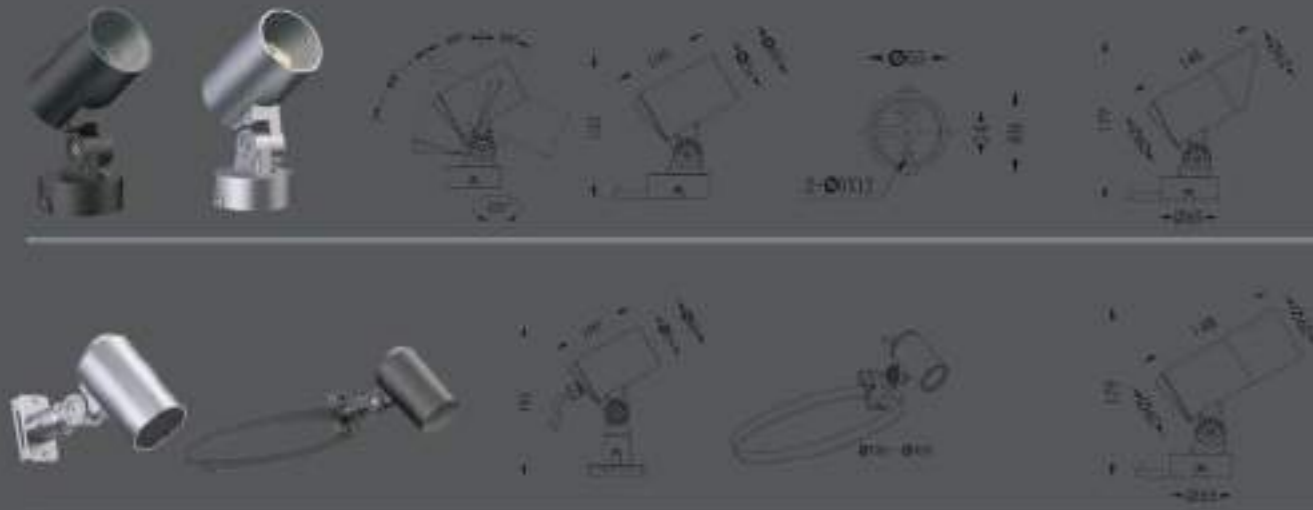


GARDEN LIGHT




Model:	GD7210-01AL	GD7212-04AL	GD7212-01AL	GD7216-04AL
Power::	10W	4x3W	12W	4x4W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°	25°/ 40°/ 60°

Dimensions:

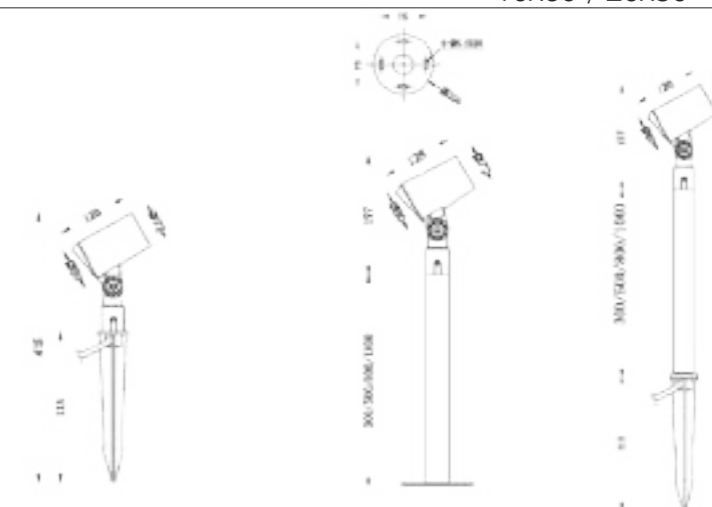

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Filter, Honeycomb

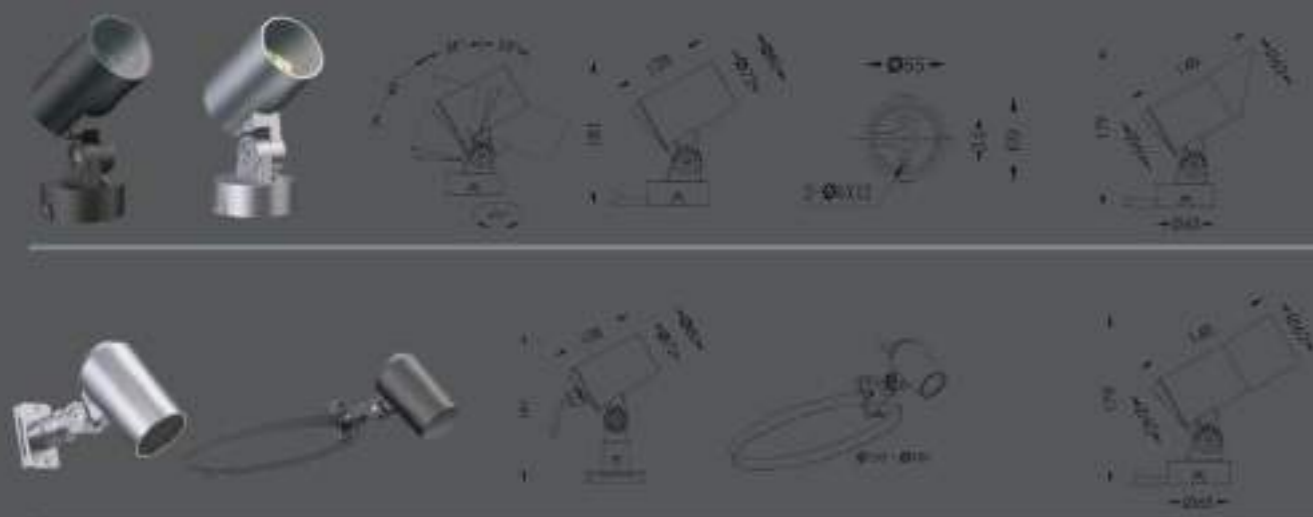


GARDEN LIGHT




Model:	GD10018-03AL	GD10024-06AL	GD10020-01AL
Power::	3x6W	6x4W	20W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	20°/ 25°/ 40°/ 60° 10x60°/ 20x30°

Dimensions:

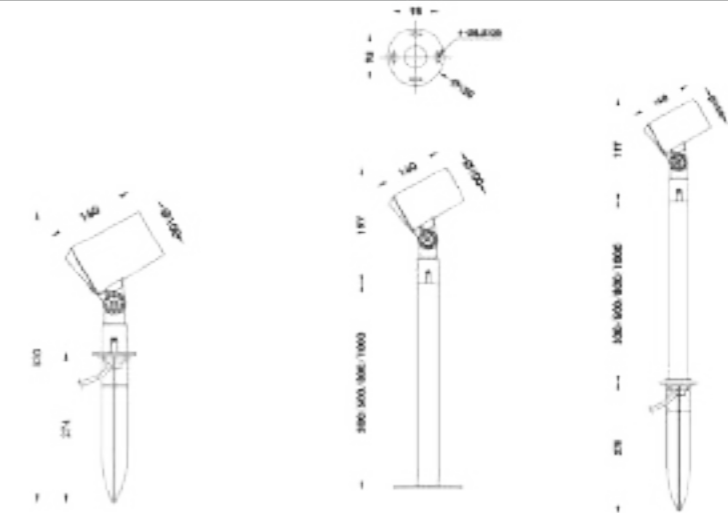

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+40°C
Accessory	Filter, Honeycomb

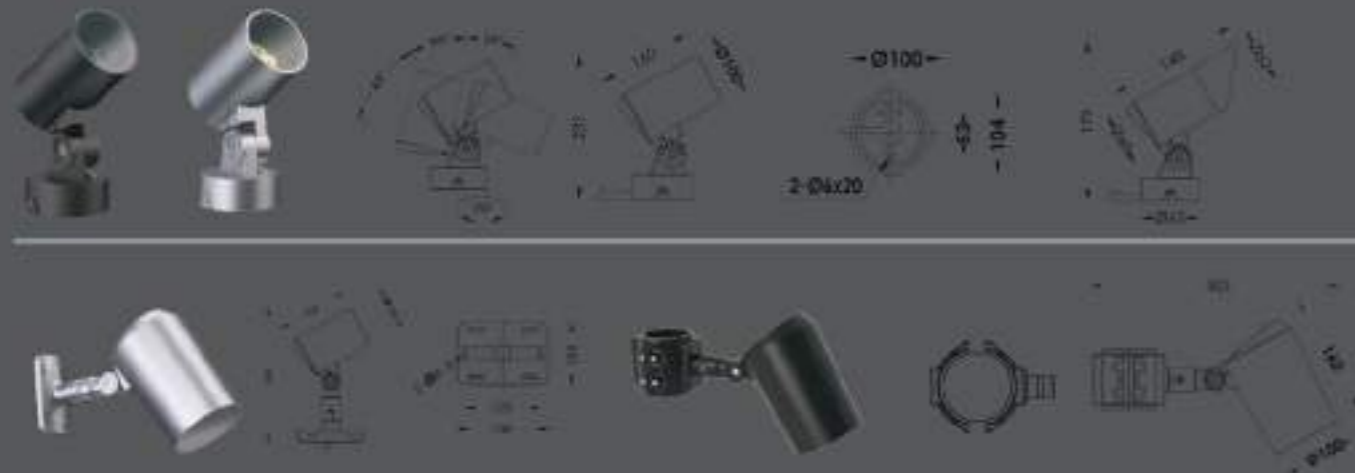

GARDEN LIGHT




Model:	GD15042-06AL	GD15036-12AL	GD15040-01AL
Power::	6x7W	12x3W	40W
Beam angle:	3°/ 8°	25°/ 40°/ 60°	25°/ 40°/ 60° 10x60°/ 20x30°
Dimensions:			

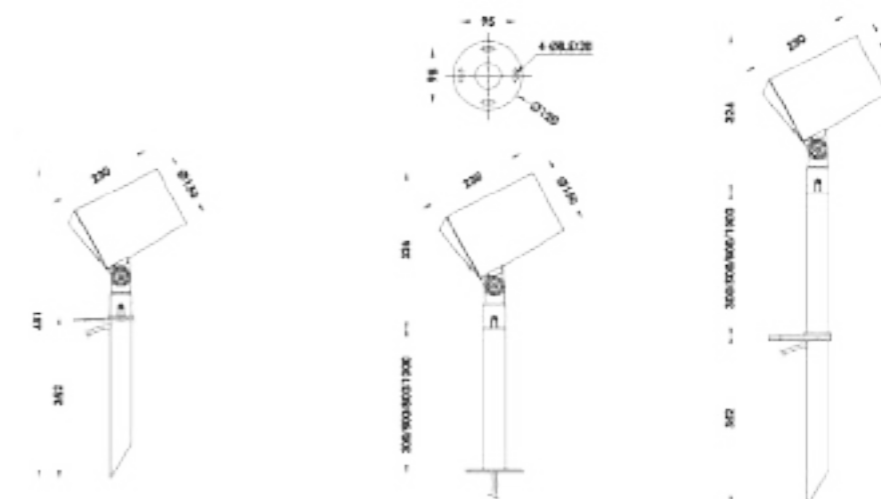

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2000K/ 2700K/ 3000K/ 4000K/ 6500K/ 10000K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+40°C
Accessory	Filter, Honeycomb

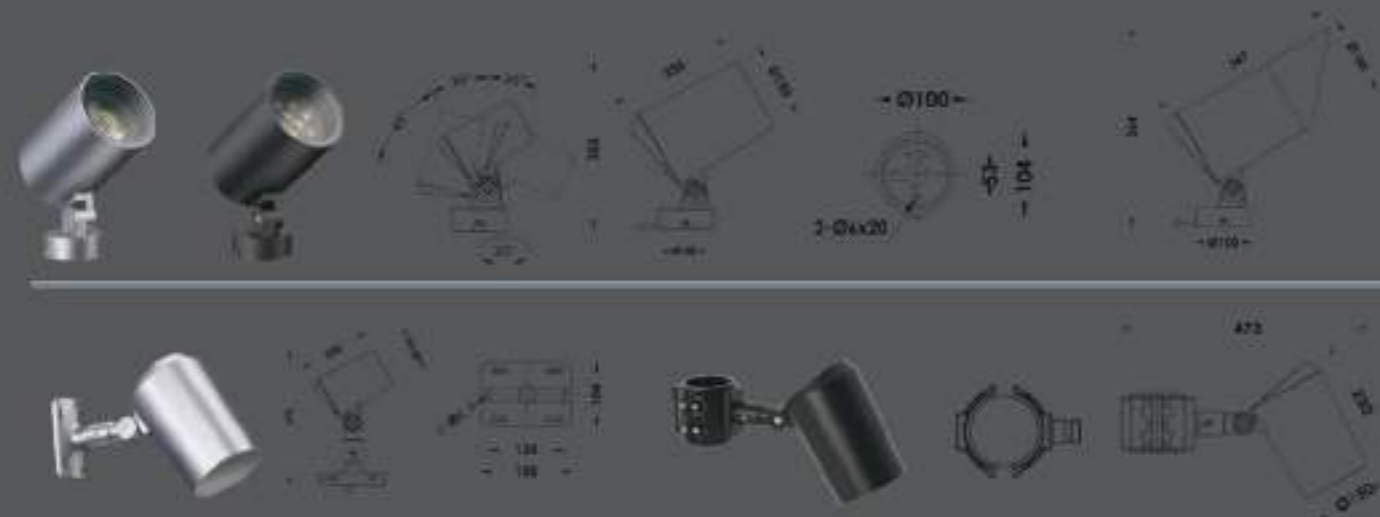



SALADIN

Model:	R12001
Power:	10W
Beam angle:	180°
Dimensions:	

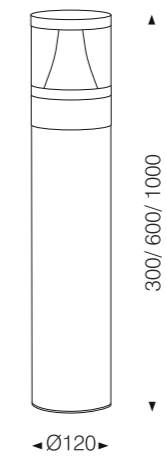


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C



SALADIN

Model:	R120360
Power:	10W
Beam angle:	360°
Dimensions:	

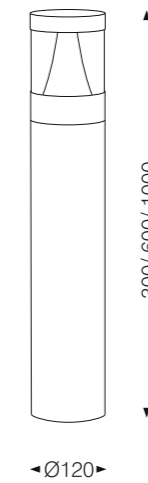


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Dali, 0-10V, Phase dimming, CC
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C



SALADIN

Model:	R12002
Power:	10W
Beam angle:	2x60°
Dimensions:	

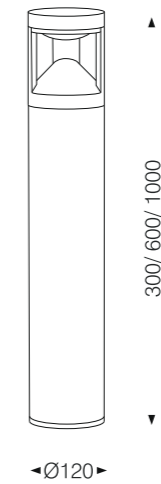

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C

SALADIN



Model:	R10212-A	R10212-B	R10212-C
Power:	12W	12W	12W
Beam angle:	360°	360°	360°

Dimensions:

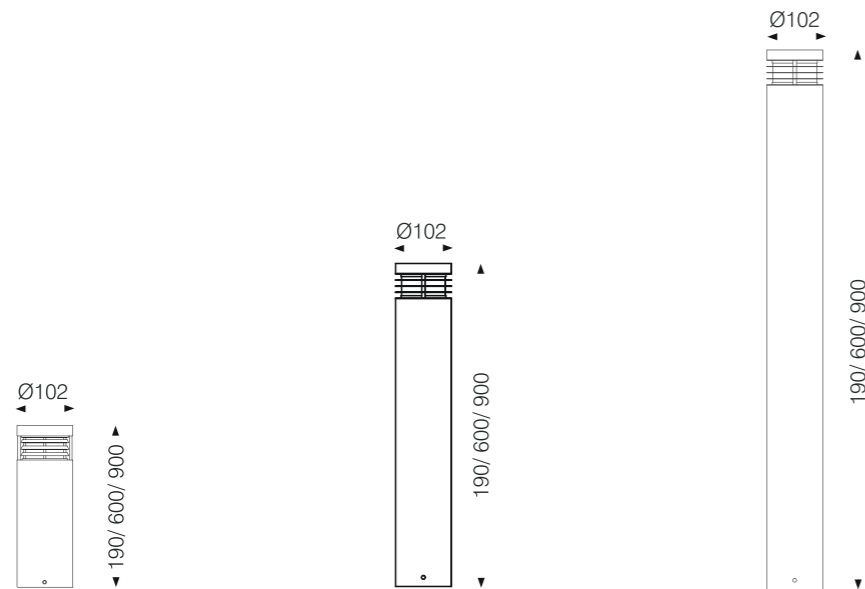

General specifications


LED:	SMD
CRI(Ra):	>80
Material:	Stainless steel body. Frost acrylic/ Clean acrylic
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	54
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C

SALADIN



Model:	R18524-A	R18524-B
Power:	24W	24W
Beam angle:	360°	360°

Dimensions:

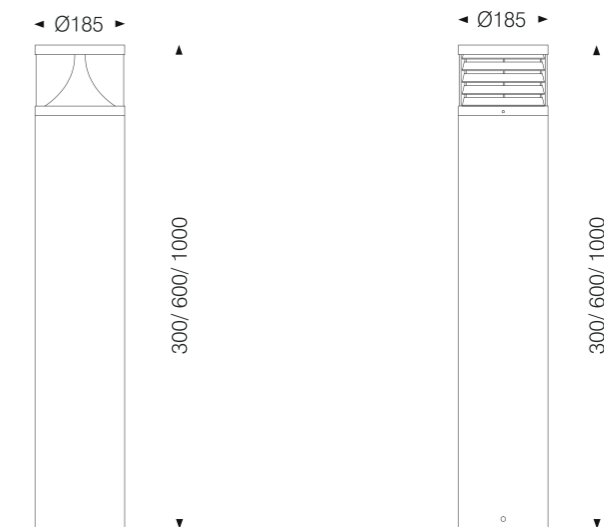


General specifications

LED:	SMD
CRI(Ra):	>80
Material:	Aluminum body. Clear glass
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C


NEW COURTYARD LAMP

Four designs:

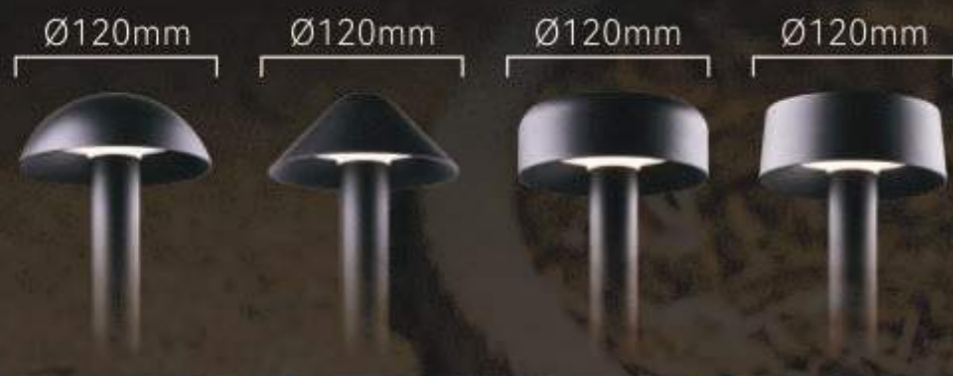

MUSHROOM

Model:	M12013-A	M12013-B
Power:	13W	13W
Dimensions:		

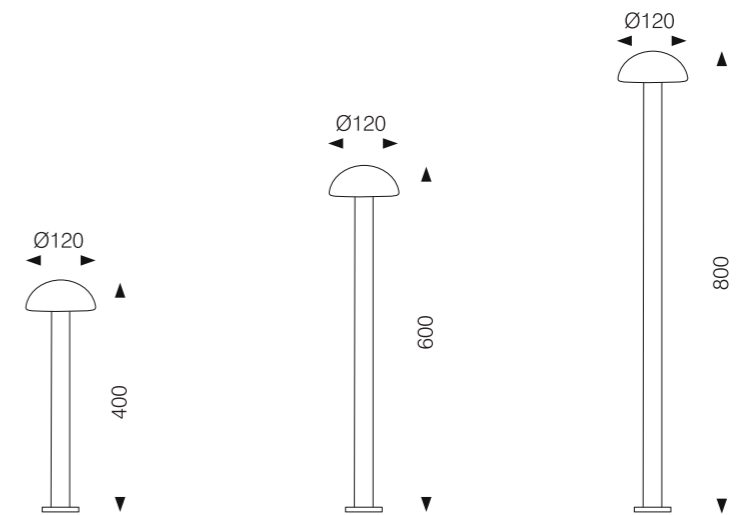


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C

WALL LIGHT



Model:	W3001A	W3002A
Power:	1W	2W
Beam angle:	10°/ 15°/ 20°/ 30°/ 50°	
Dimensions:		

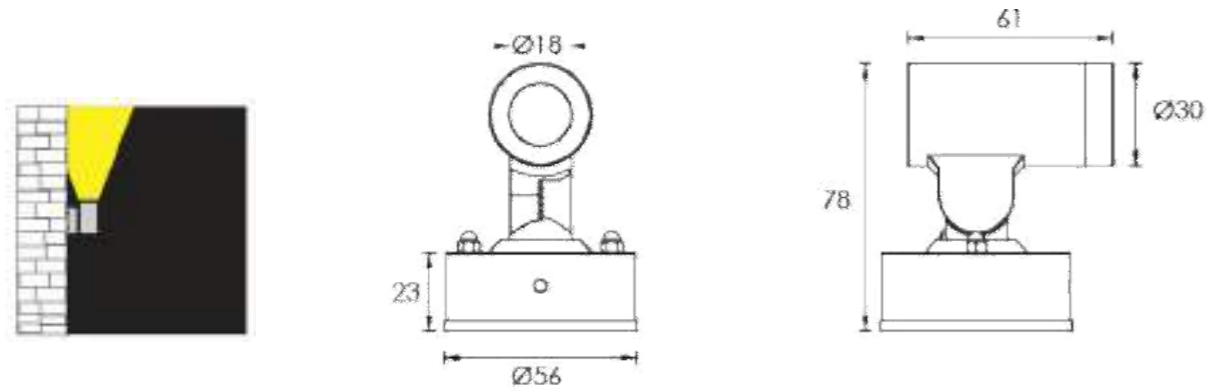


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C

WALL LIGHT



Model:	W3002B	W3004B
Power:	2x1W	2x2W
Beam angle:	10°/ 15°/ 20°/ 30°/ 50°	
Dimensions:		

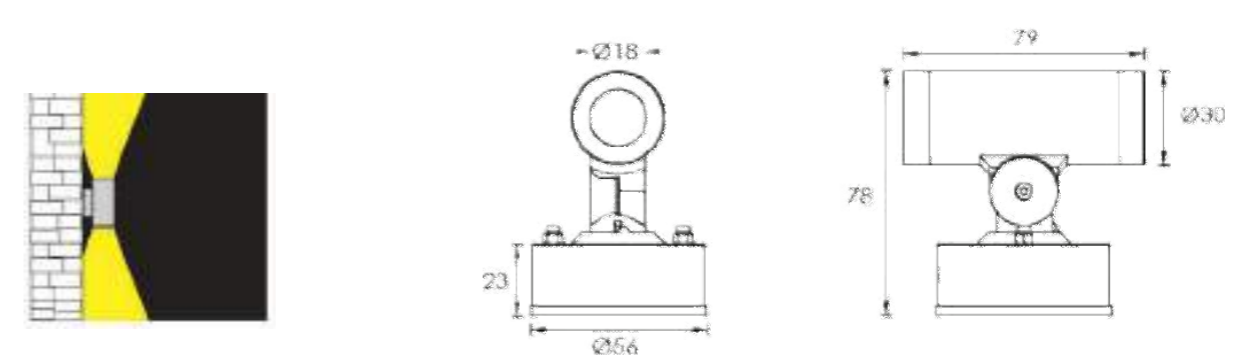

General specifications


LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~+50°C



WALL LIGHT



Model:	FW17506-01	FW17510-02	RW13506-02
Power:	6W	2x5W	2x3W
Beam angle:	120°	120°	Adjustable 120°
Dimensions:			

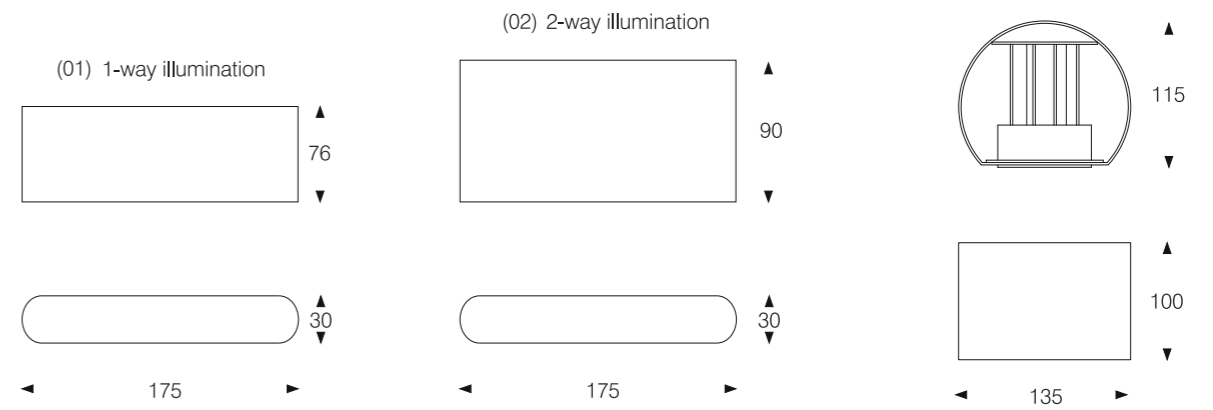


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	AW6509A
Power:	9W
Beam angle:	8°/ 12°/ 24°/ 30°/ 45°
Dimensions:	

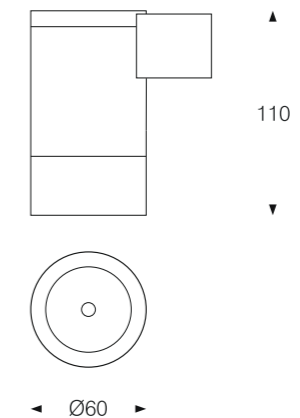


General specifications

LED:	Bridgelux/ Cree
CRI(Ra):	>90
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb



Model:	AW6018B	AW11330B
Power:	2x9W	2x15W
Beam angle:	24°/ 38°/ 60°	
Dimensions:		

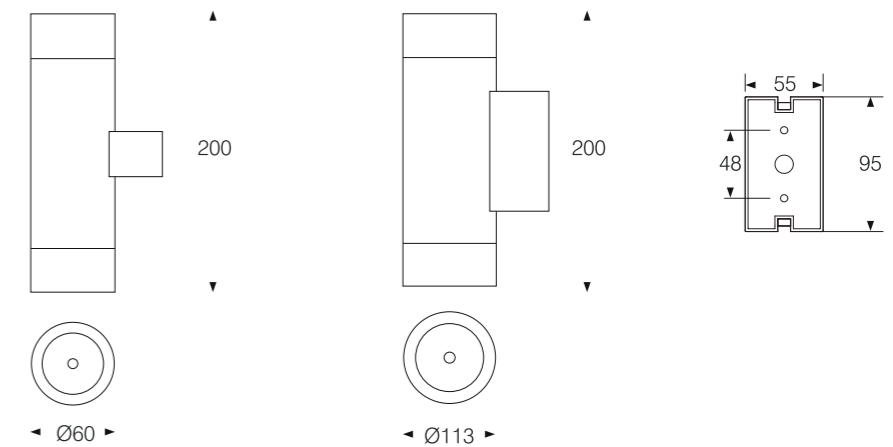


General specifications

LED:	Bridgelux/ Cree
CRI(Ra):	>90
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	> 50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC85V-265V/ DC24V
Operating temperature:	-20°C~ +50°C
Accessory	Honeycomb



Model:	AW120-05AL	AW140-10AL	AW170-15AL	AW200-20AL
Power:	5W	10W	15W	20W
Beam angle:	15°/ 24°/ 36°/ 60°			

Dimensions:

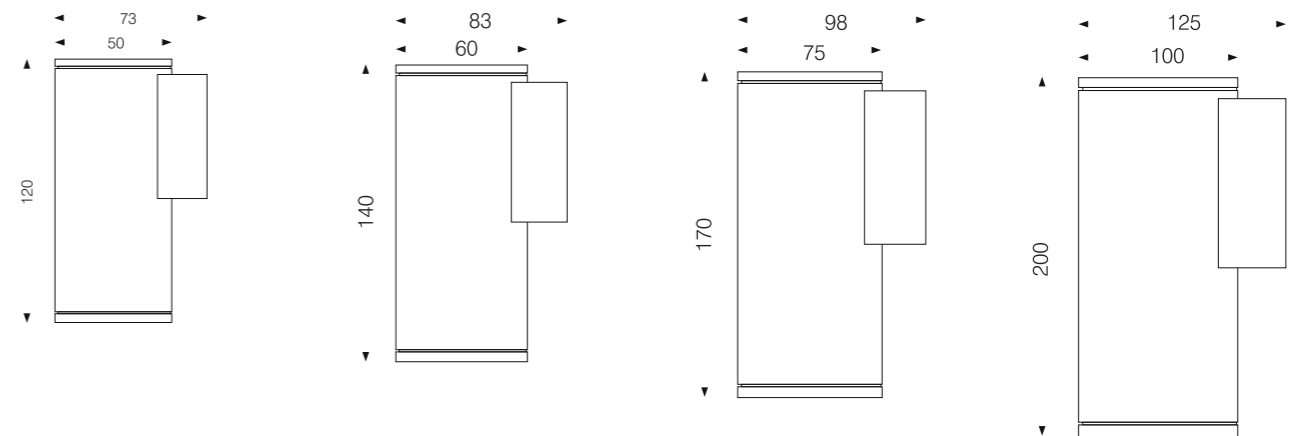


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC12V/ DC24V
Operating temperature:	-20°C~+40°C



Model:	AW160-08AL	AW180-18AL	AW240-28AL	AW280-38AL
Power:	2x4W	2x9W	2x14W	2x19W
Beam angle:	15°/ 24°/ 36°/ 60°			

Dimensions:

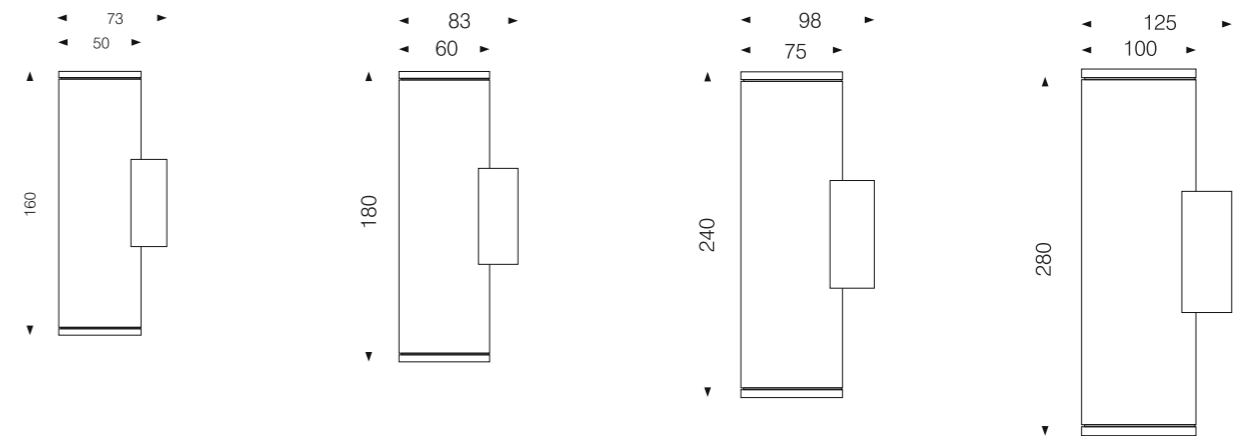


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	Single
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC85V-265V/ DC12V/ DC24V
Operating temperature:	-20°C~+40°C





Model:	WD280-36SL
Power:	36W
Beam angle:	2x120°
Dimensions:	

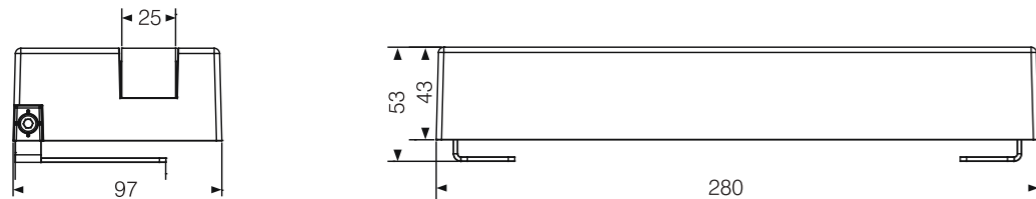


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	WD165-20SL
Power:	20W
Beam angle:	8x120°
Dimensions:	

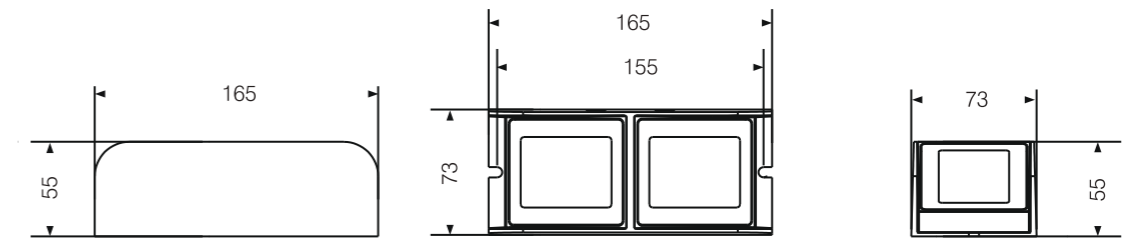


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	WD110-03LT
Power:	3W
Beam angle:	2x120°
Dimensions:	

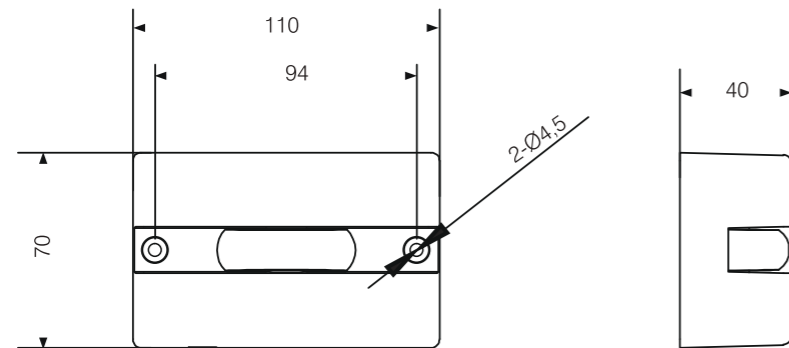


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/3000K/4000K/6500K//Pc Amber/RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	WD160-06LT
Power:	6W
Beam angle:	180°
Dimensions:	

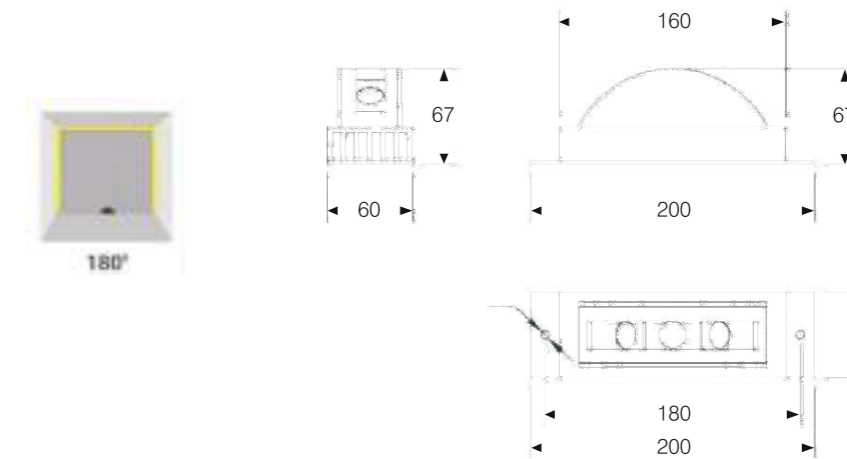



General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C

WINDOW LIGHT



Model:	WD100-06LT
Power:	6W
Beam angle:	180°/ 360°
Dimensions:	

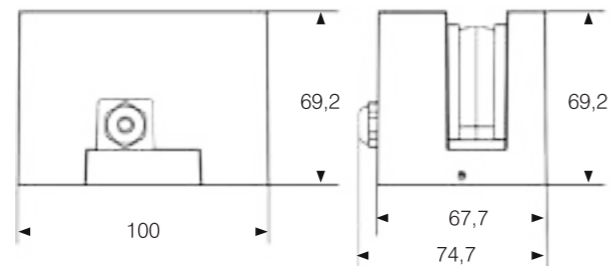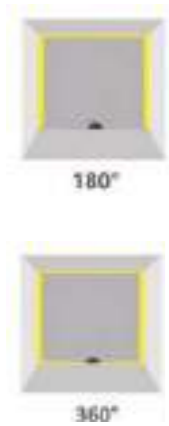


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C

WINDOW LIGHT



Model:	WD1001-07RL
Power:	7W
Beam angle:	3x180°
Dimensions:	

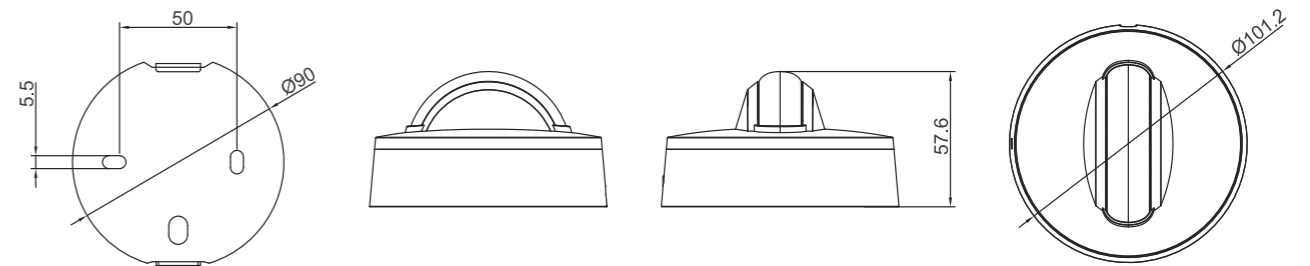


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	2700K/ 3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC12V/ DC24V
Operating temperature:	-30°C~ +45°C



Model:	WD62-03LT	WD62-03LT	WD130-12LT
Power:	3W	6W	12W
Beam angle:	180°		

Dimensions:

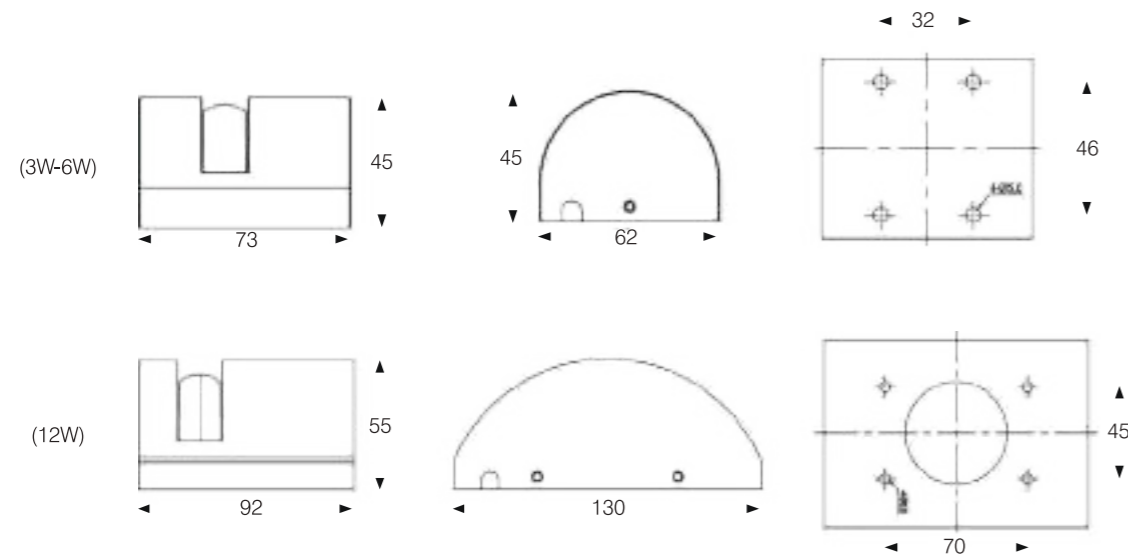


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Die-cast Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	WD148-07LT
Power:	7W
Beam angle:	180°

Dimensions:


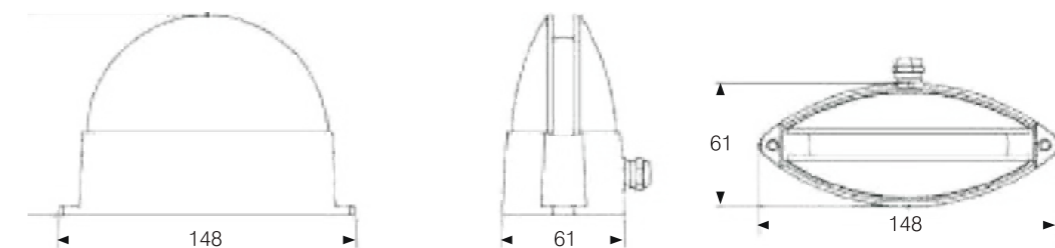


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	WD108-07LT
Power:	7W
Beam angle:	360°
Dimensions:	

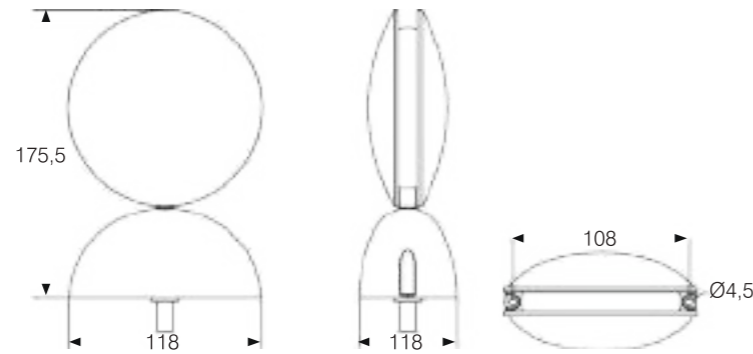


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~+50°C



Model:	WD85-06LT
Power:	6W
Beam angle:	180°
Dimensions:	

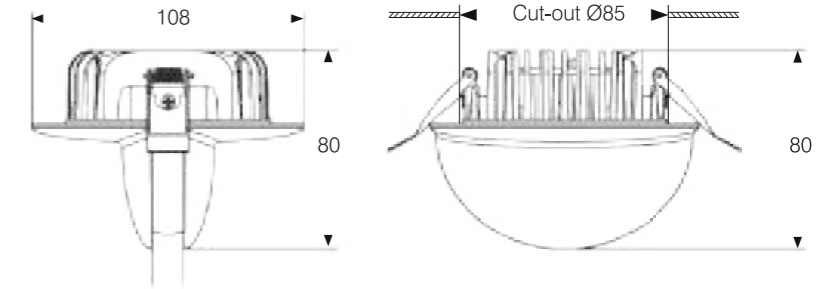


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Aluminum
CCT:	3000K/ 4000K/ 6000K
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~+50°C



Model:	WD129-04SL	WD129-08SL	WD129-12SL
Power:	4W	8W	12W
Beam angle:	2°/ 20°/ 30°/ 60°		
Dimensions:			

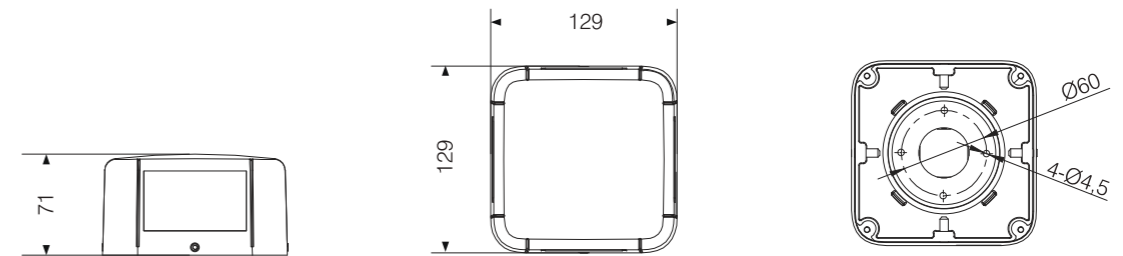


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	AC100-240V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX24-01SL
Power:	1W
Beam angle:	120°
Dimensions:	

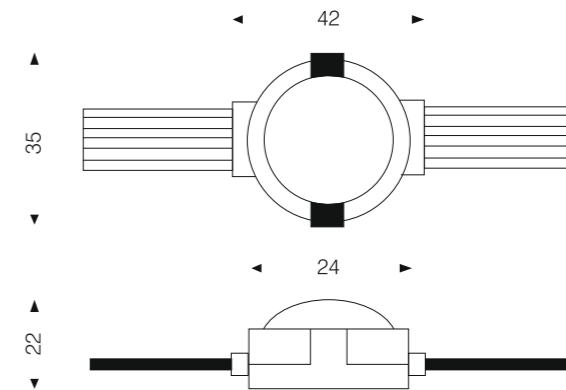


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX52-02SL
Power:	1,8W
Beam angle:	120°
Dimensions:	

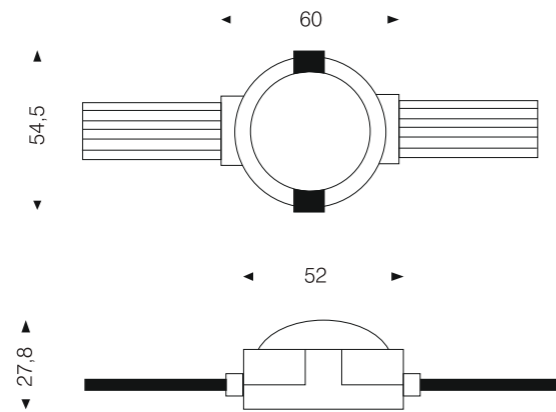


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX52-03SL
Power:	3W
Beam angle:	120°
Dimensions:	

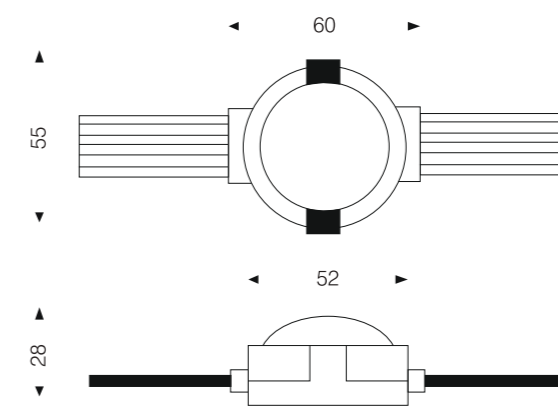


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX90-03LD	PX90-06LD
Power:	3W	6W
Beam angle:	>120°	>120°
Dimensions:		




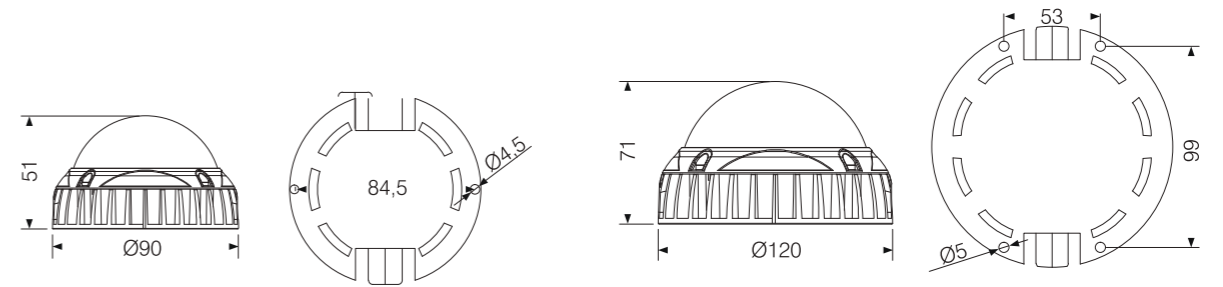


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX110-3.5SL	PX110-06SL	PX60-02SL	PX60-03SL
Power:	3,5W	6W	2W	3W
Beam angle:	≥120°			
Dimensions:				

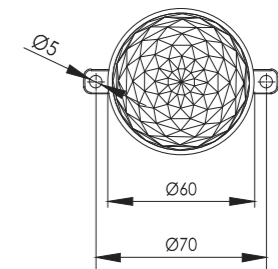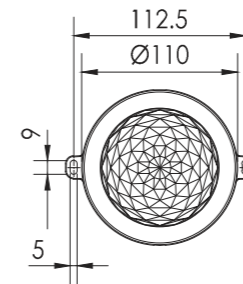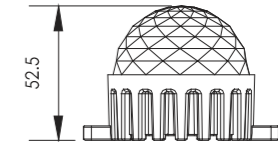


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65/ 66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~+50°C



Model:	PX150-08EXC
Power:	8W
Beam angle:	≥ 105°
Dimensions:	

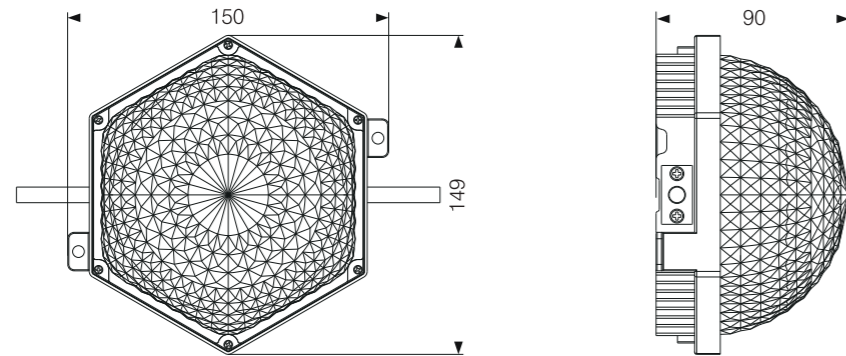


General specifications

LED:	SMD
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C



Model:	PX97-15EXC
Power:	15W
Beam angle:	≥ 120°
Dimensions:	

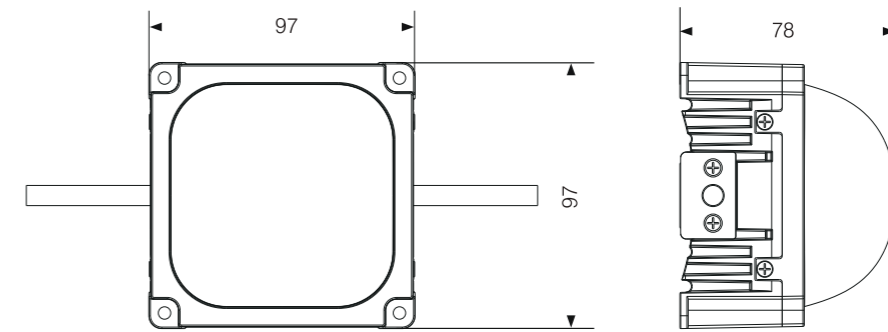


General specifications

LED:	SMD
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC12V/ DC24V
Operating temperature:	-20°C~ +50°C




Model:	LT24-12RL
Power:	15W
Beam angle:	120°
Dimensions:	

Flat Bracket Size: 1000x24x54.4mm(L*W*H) Net Weight: 0.6kg
L=1000/500/300mm

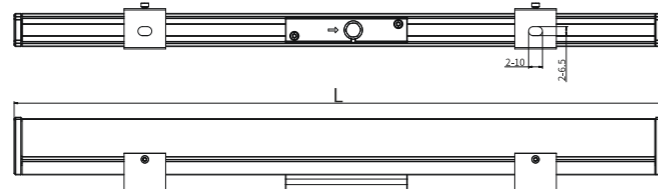

Clip bracket Size: 1000x24x54.4mm(L*W*H) Net Weight: 0.6kg
L=1000/500/300mm

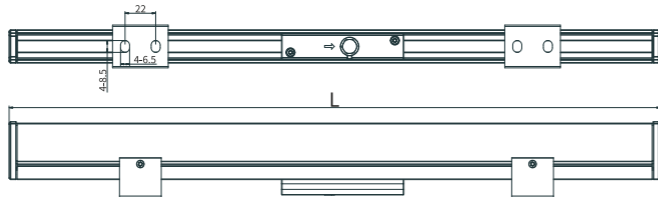

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	66
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali...
Voltage:	DC24V/ DC48V
Operating temperature:	-20°C~ +45°C




Model:	LT33-15RL
Power:	15W
Beam angle:	120°
Dimensions:	

Rotate bracket Size: 1000x32.5x74.7mm(L*W*H) Net Weight: 0.7kg
L=1000/500/300mm



Flat Bracket Size: 1000x32.5x56.6mm(L*W*H) Net Weight: 0.7kg
L=1000/500/300mm

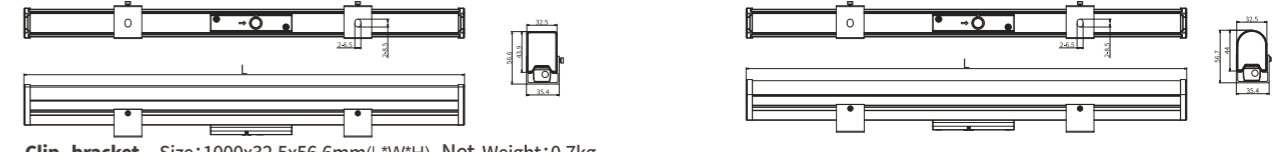

Clip bracket Size: 1000x32.5x56.6mm(L*W*H) Net Weight: 0.7kg
L=1000/500/300mm




General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V/ DC48V
Operating temperature:	-20°C~ +45°C



Model:	LT48-12RL	LT48-15RL
Power:	12W	15W
Beam angle:	120°	
Dimensions:		

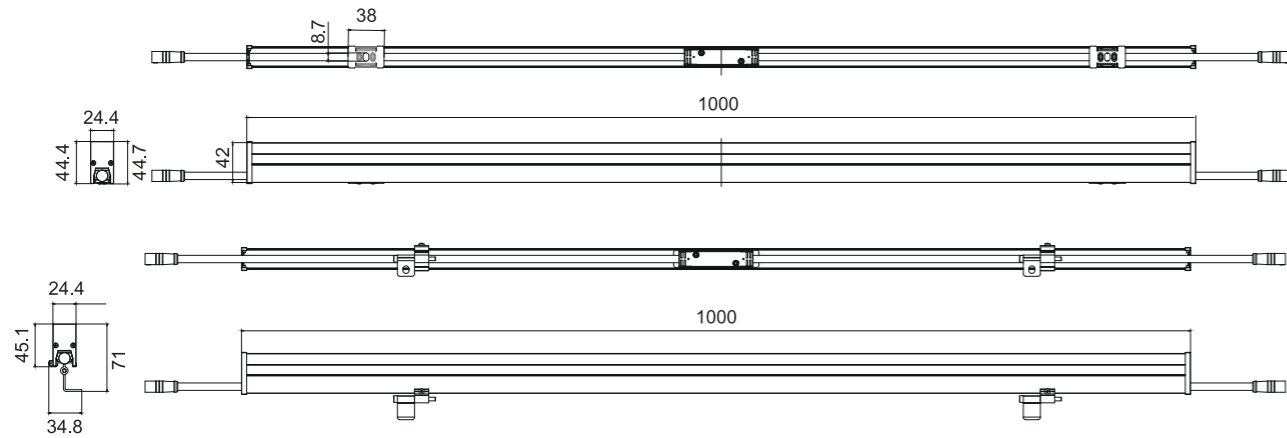


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-40°C~ +50°C



Model:	LT48B-12RL
Power:	12W
Beam angle:	120°
Dimensions:	

L=1000/ 500/ 300mm

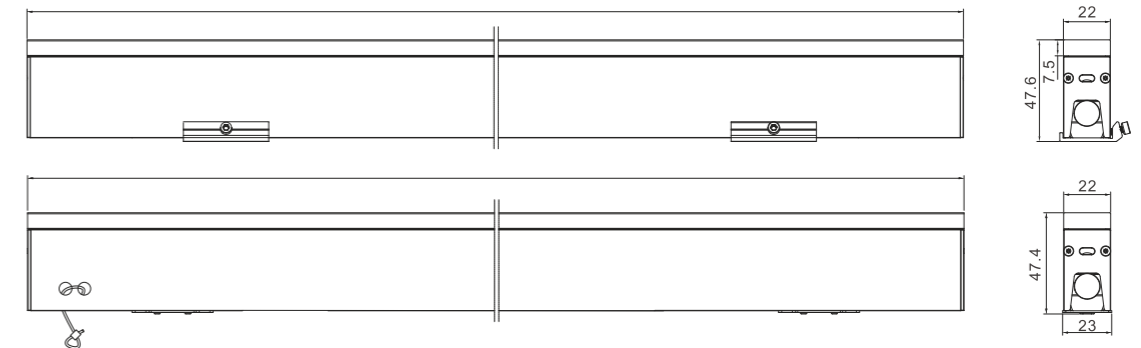


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Tempered glass cover and custom
CCT:	2700K/ 3000K/ 4000K/ 5700K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V/ DC48V
Operating temperature:	-40°C~ +50°C



Model:	LT50-12LD
Power:	12W
Beam angle:	120°
Dimensions:	

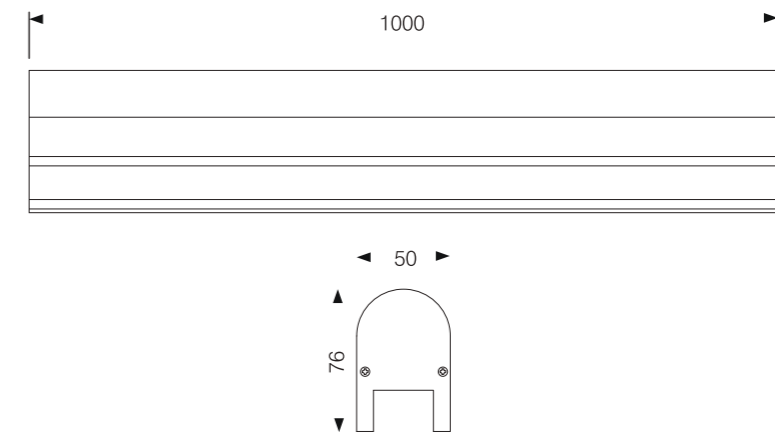


General specifications

LED:	Osram/ Cree
CRI(Ra):	> 80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~ +50°C

LED TUBE



Model:	LT31-12LD
Power:	12W
Beam angle:	120°
Dimensions:	

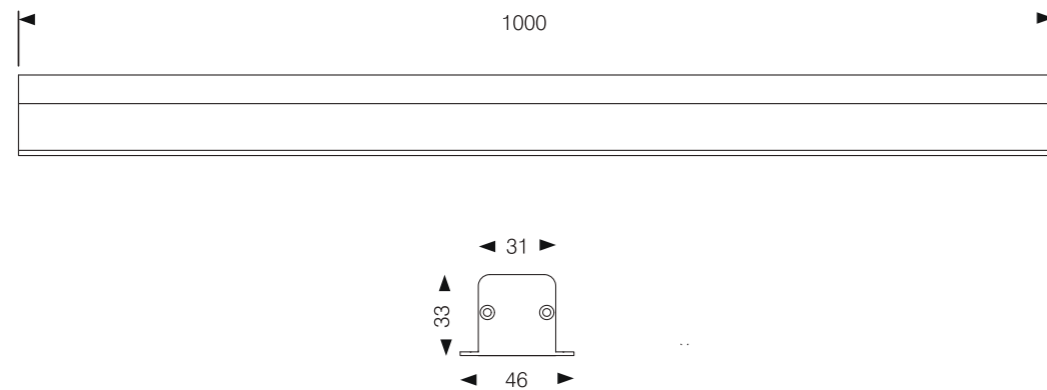


General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C

LED TUBE



Model:	LT31-15LD
Power:	15W
Beam angle:	120°
Dimensions:	

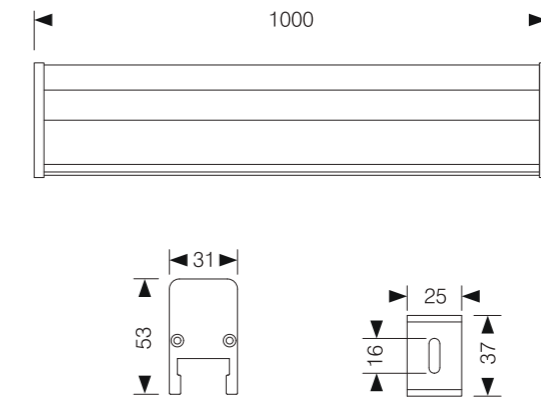

General specifications

LED:	Osram/ Cree
CRI(Ra):	>80
Material:	Extruded - aluminum housing with high corrosion resistance Imported PC lampshade and custom
CCT:	2700K/ 3000K/ 4000K/ 6500K/ RGB/ RGBW
IP rating:	65
Lifetime:	>50.000h
Control:	On/ Off, Phase dimming, 0-10V, Dali, DMX512...
Voltage:	DC24V
Operating temperature:	-20°C~+50°C



Product Introduction

H803TC can work with PC (online), SD card (offline) or DMX console. H804TC up to 170000 pixels, 2 ports control up to 255 sub-controller.

Specification

No	Parameter	
01	Product name	LED intelligent master controller
02	Item NO	H803TC
03	Dimension	270(L) x 150(W) x 45(H) mm
04	Input voltage	AC220V
05	Power: consumption	2W
06	Output port	2 ports control maximum 255 slave Controller
07	Control pixel	170000 pixels
08	SD card supports	FAT32, FAT16 format, maximum capacity is 64GB, stores up to 64 DAT files
09	Features	<ul style="list-style-type: none"> • H803TC can work with PC (online), SD card (offline) or DMX console. • Slave controller is H802RA, you can set address for DMX512 chips. • By combining H803TTC with H802RA, you can set address for DMX512 chips. • H803TC transmission distance from H803TC to slave controller is 100 meters. • Use four buttons to switch files, set play mode, speed and brightness. • Supports Encryption of Power-up times.



Product Introduction

H807SA has eight-port output single controller that can be online and can be offline, and can control up to 8192 pixels. Support Art-Net protocol, DMX chip address, can connect to DMX console and add or delete DAT files through LAN.

Specification

No	Parameter	
01	Product name	LED intelligent master controller
02	Item NO	H807SA
03	Dimension	233(L) x 140(W) x 45(H) mm
04	Input voltage	AC220V
05	Power: consumption	2W
06	Output port	TM1812 and simultaneous chips can output 16 ports.
07	Control pixel	Eight output ports, control up to 8192 pixels. Each port can control up to 1024 points.
08	SD card supports	FAT32, FAT16 format, maximum capacity is 64GB, stores up to 64 DAT files
09	Features	<ul style="list-style-type: none"> • It can be control led by LAN synchronously, and can switch files by sending UDP commands to network port 2, or obtain the serial number of the currently playing file. • Can be connected to DMX console, supports RGBW, can replace files, adjust speed and brightness, and respond quickly. • Support Art-Net protocol, can use MADRIX, jinx and other software supporting Artnet directly. Supports the encryption function of limiting the number of times of Power-on. • Supports addressing of DMX chips, with built-in counting and internal control testing functions. • Can be connected and disconnected, can be directly connected to the computer network card, router, can also be connected to the main controller. • Support online firmware upgrade. • Set Sculpt of DAT to support DAT files of different shapes.



Product Introduction

BP-D2120K is a large-scale online master controller, cooperates with slave controller - BP - D2120K in application. BP-D2120K is access to load 0.12 million pixels with SD card storage and the remote control, which can implement function, such as the off-line timing play, play fragment selection, overall brightness adjustment, built-in animation test program, RGBW four-color fixture lighting control and etc. SL-D2120K is the combination of DMX512 and SPI serial control (can not be selected simultaneously), which immensely meets the various demand from customers during the application and debugging.

Main performance

1. Adopt the large volume of 8GB SD card to store data with various programs.
2. Own LCD English display interface with features of easy operation intuitive.
3. By receiving BTS base station signal to reach the wireless linkage synchronization of multiple Controller, meeting the clients requirements to synchronize multiple Controller when there is no connection between multiple building.
4. Based on Android platform and SIM communication to send remote control instructions, to control SL-B2120K program segment speed and brightness adjustment etc function
5. Offer various controller methods, such as DMX512 and SPI, SL-D2120K is access to load 0,12 million pixels when cooperated with slave controller, it is especially applied to large-scale projects.

Specification

No	Parameter	
01	Product name	LED intelligent master controller
02	Item NO	BP-D2120K
03	Dimension	236(L) x 135(W) x 45(H) mm
04	Driver	AC220V 50Hz
05	Rated Power:	15W
06	Control pixel	0.12 million pixels
07	Control effect	Word, animation, images, video
08	SD card volume	8GB
09	Communication interface	RJ-45
10	Program quantity	≤80 units
11	Speed grade	100 grade
12	Brightness adjustment grade	100 grade
13	Protection grade	IP20
14	Fixed hole interval	75mm, 218.4mm
15	Application	Outdoor and indoor led lighting project



Product Introduction

The BP-G2120K is a offline master Controller, cooperates with slave controller-BP-D3200 in application, to form a linkage offline system. By receiving satellite signals to reach global synchronization among multiple Controller. To meet the need for customers to synchronize multiple Controller in a situation where multiple buildings cannot be connected.

Main performance

1. The maximum access to load 0,12 million pixels.
2. The System supports automatic, timing, holiday modes.
3. The Controller with external buttons remote control, which can implement function, such as single machine timing play, play fragment selection, overall brightness adjustment, the white balance adjustment, play speed adjustment.
4. Adopt the large volume of 8GB SD card to store data with various programs.
5. Supports switch parallel scheme: Reduce system cascade chain length to improve stability.
6. Supports double-channel backup. It will not be affected if one controller is bad or the network line is broken.

Specification

No	Parameter	
01	Item No	Satellite Synchronous Offline controller
02	Item NO	BP-GK2120K
03	Dimension	236(L) x 135(W) x 45(H) mm
04	Driver	AC100~240V 60/ 50Hz
05	Rated Power:	15W
06	Control pixel	0.12 million pixels
07	Control effect	Word, animation, images, video
08	SD card volume	8GB
09	Communication interface	RJ-45
10	Clock type	≤80 units
11	Speed grade	100 grade
12	Brightness adjustment grade	100 grade
13	Protection grade	IP20
14	Fixed hole interval	75mm, 218.4mm
15	Application	Outdoor and indoor led lighting project



Product Introduction

BP-D100 is a DMX signal amplifier with the function of signal isolation. The housing adopts ABS material with high intensity and profound corrosion resistance, Own small Power: consumption, excellent shielding effectiveness, Powerful anti-jamming capability, strong stability. Degree of protection IP65.

Specification

No	Parameter	
01	Product name	DMX signal isolated amplifier
02	Item NO	BP-D100
03	Dimension	122(L) x 55(W) x 38(H) mm
04	Driver	DC6~36V/AC100-240V
05	Power: consumption	≤2W
06	Isolate voltage	1000V
07	Communication interface	DMX512
08	Transmission speed	≤1 Mbps
09	Addressing mode	Support automatic addressing
10	Protection grade	IP65
11	Master control	SL-D8000, SL-D2000, SL-D3000 or DMX512 Console
12	Fixed hole interval	110mm
13	Application	Outdoor and indoor led lighting project or stage lighting project