

DLA LIGHTING

CATALOGUE 2026

LIGHTING

INNOVATIVE

GLOW


HARMONY

TECHNOLOGY

ARTISTIC

REFINEMENT

TIMELESS

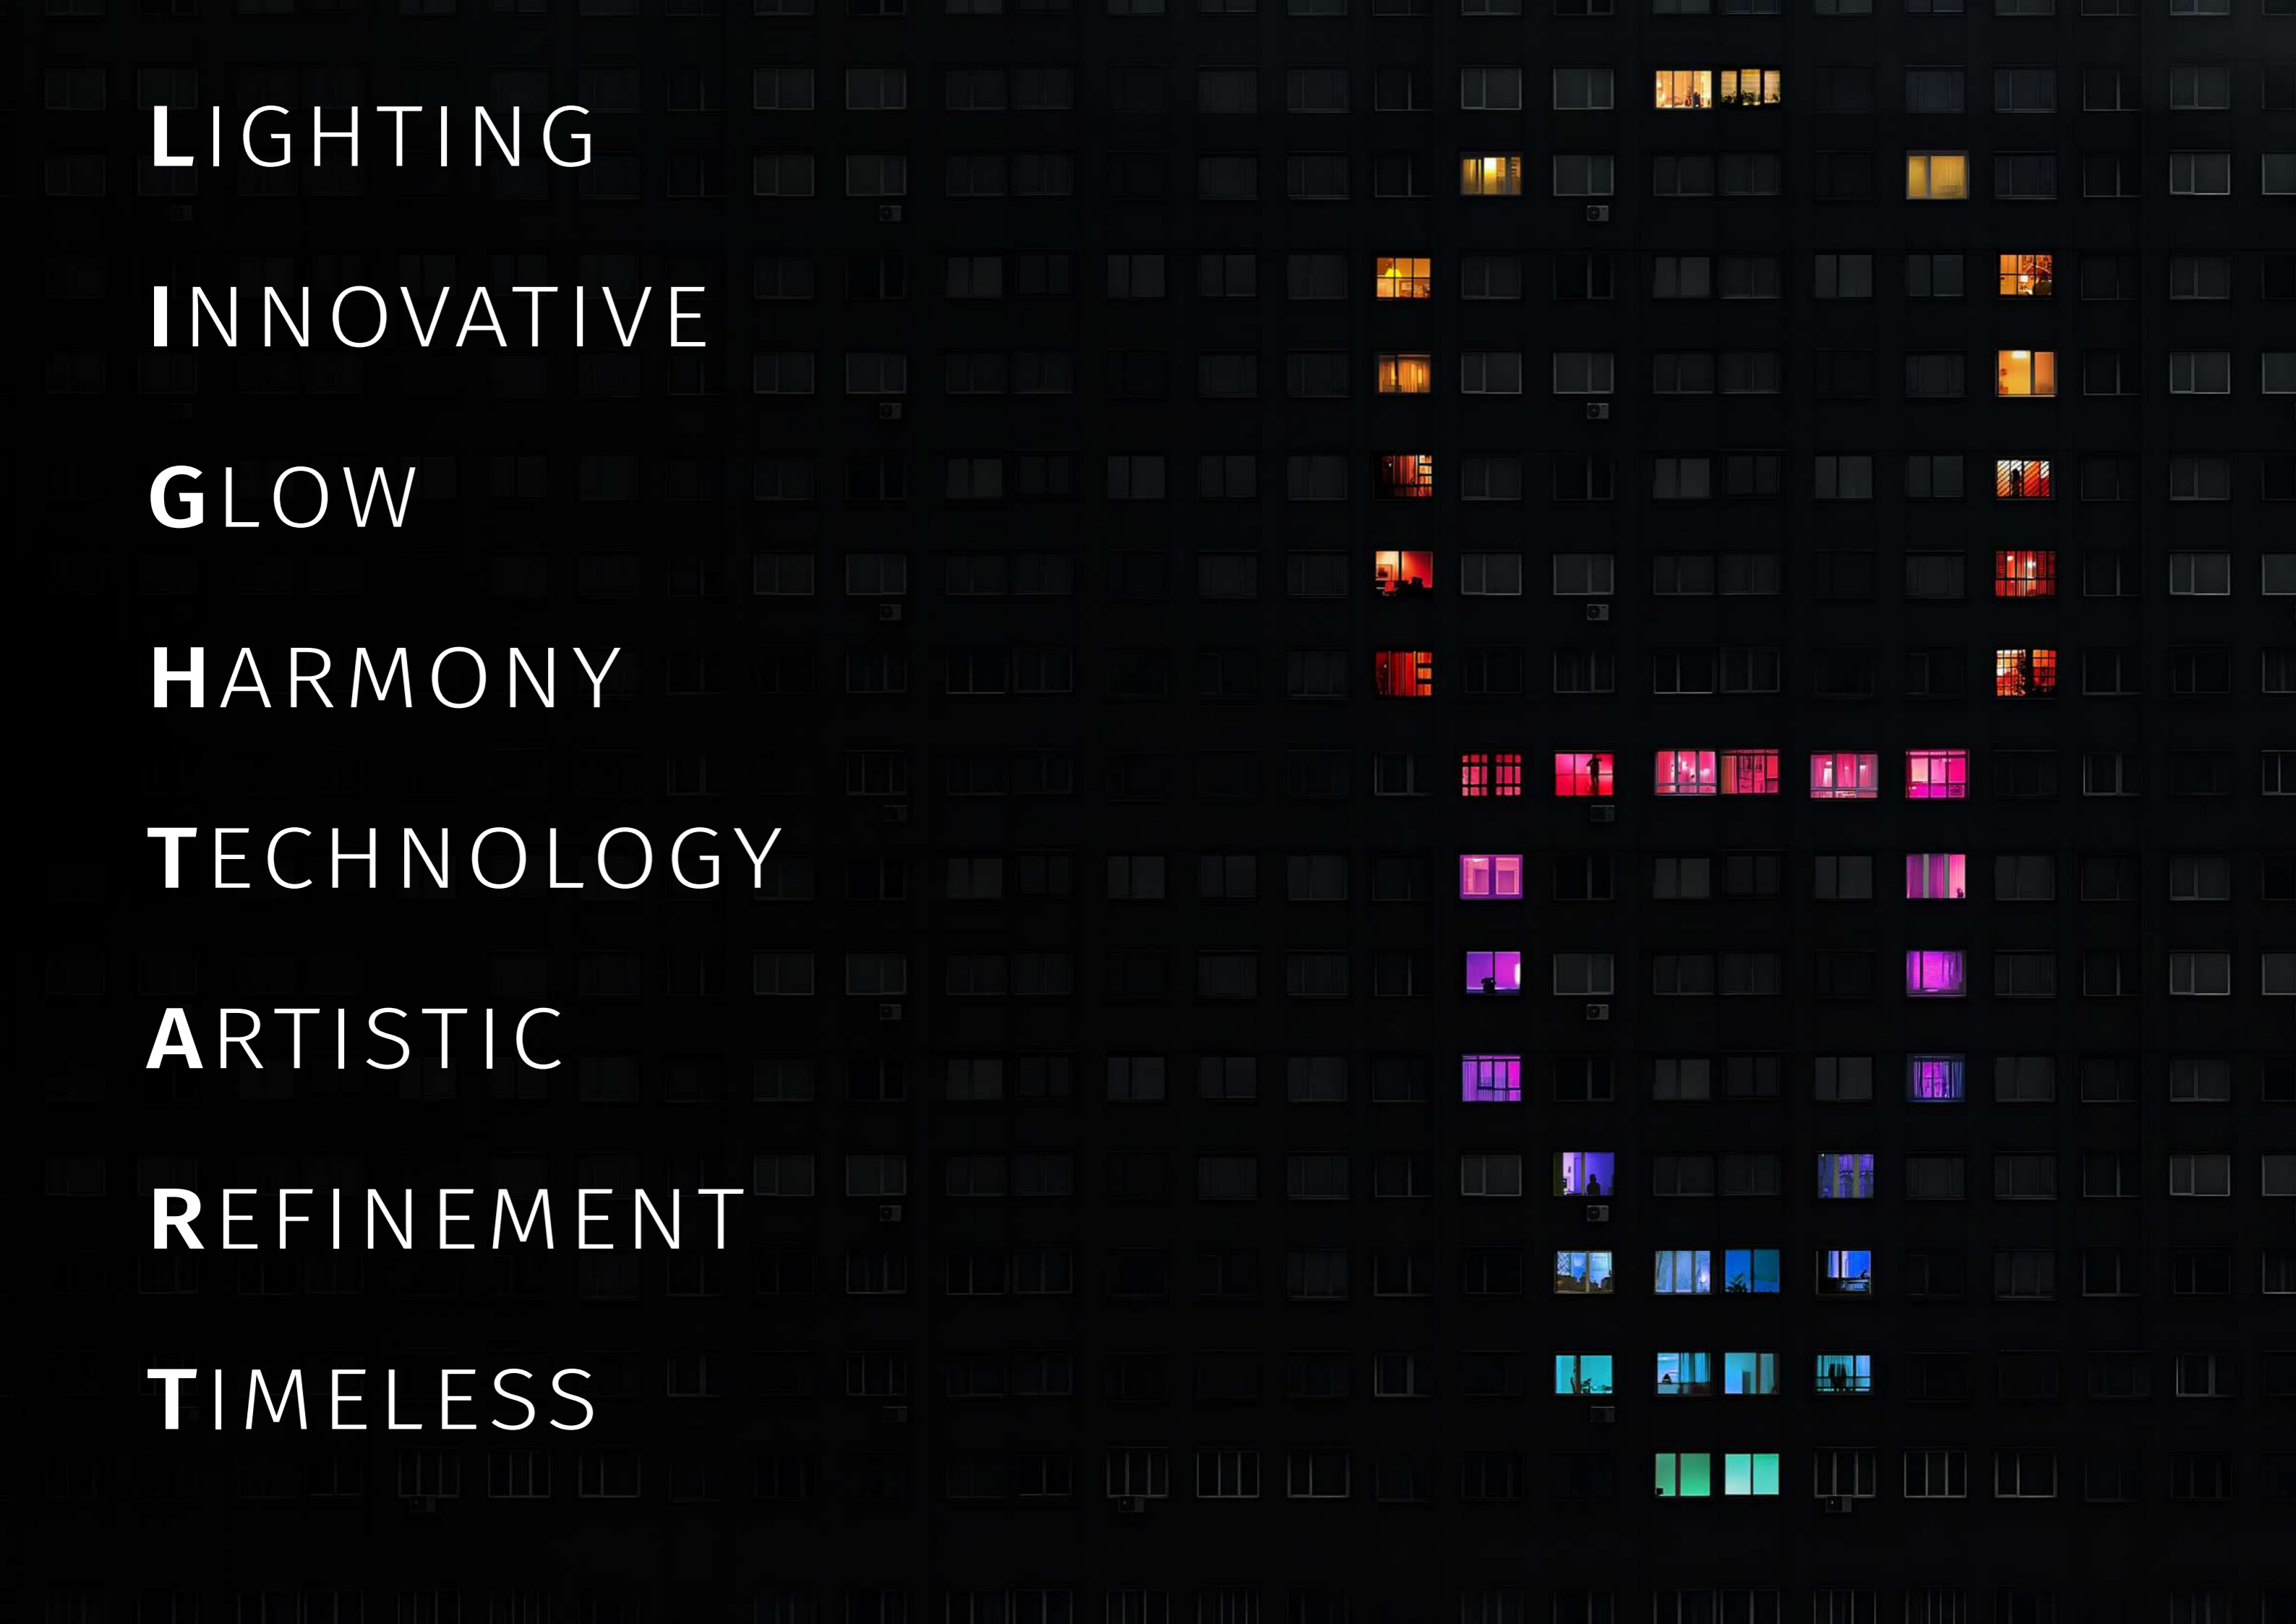




High Color Rendering Index, Restores True Colors!




Colour rendering




Ra > 98

Fidelity Index Rf for Each of the 99 CES - TM30-18

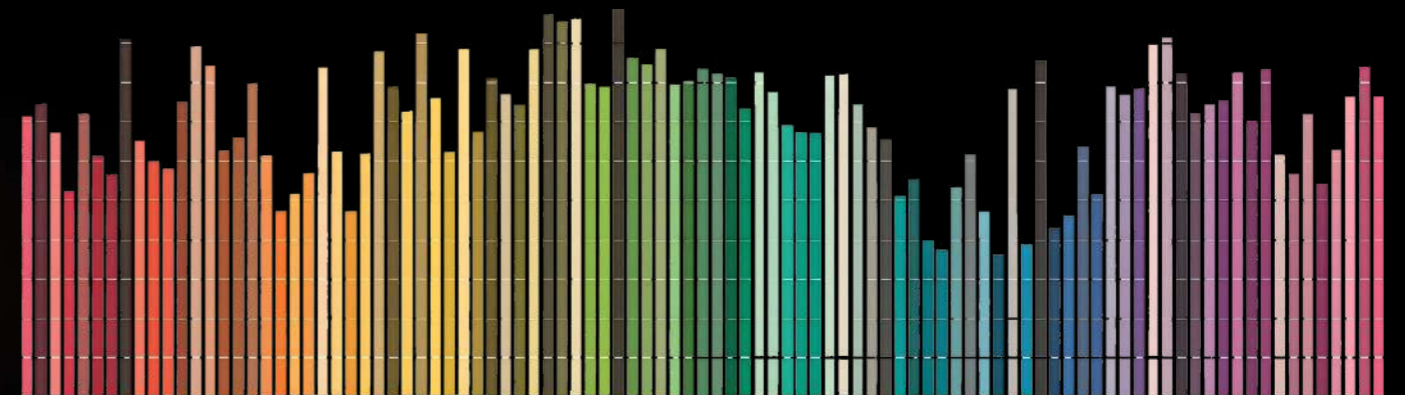


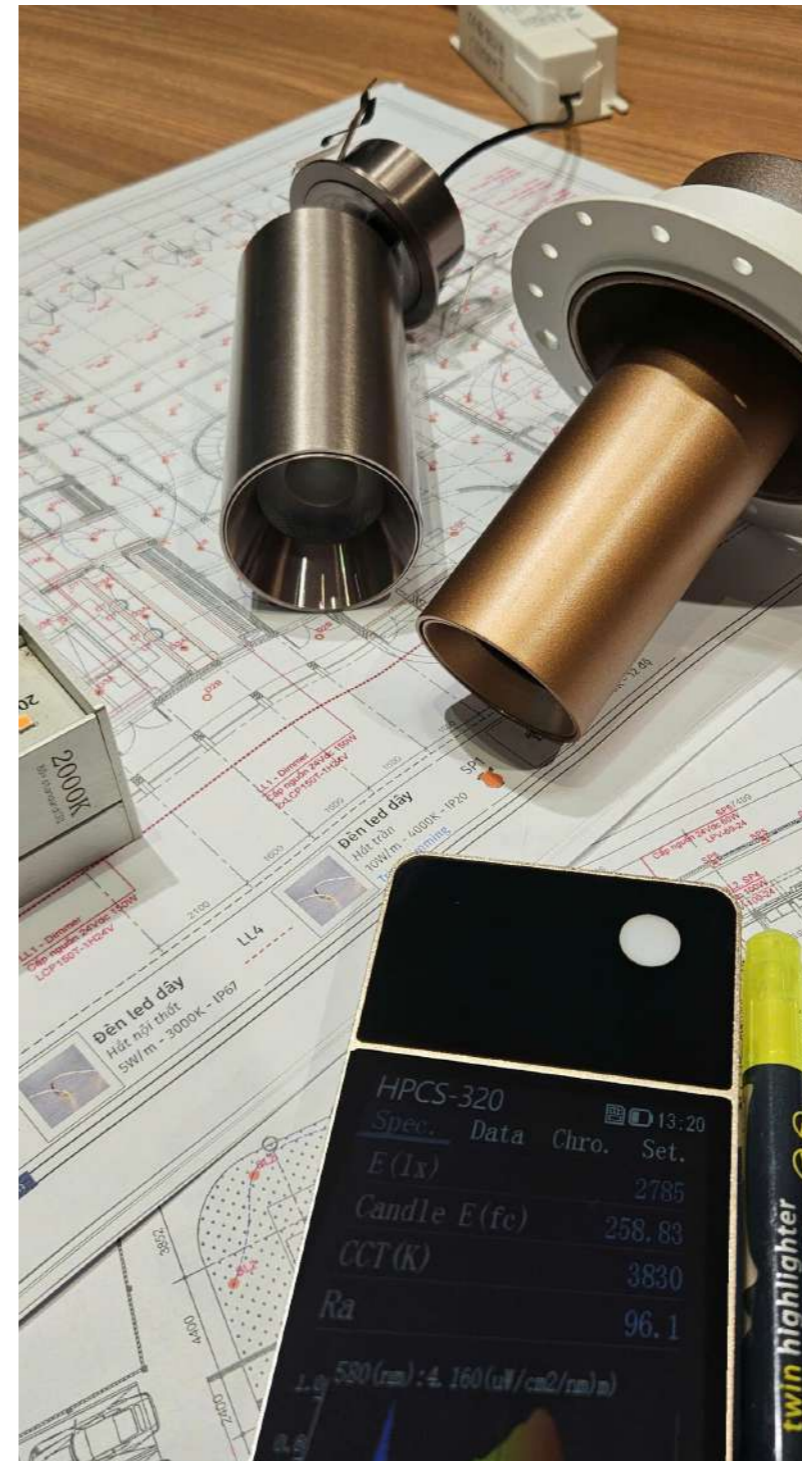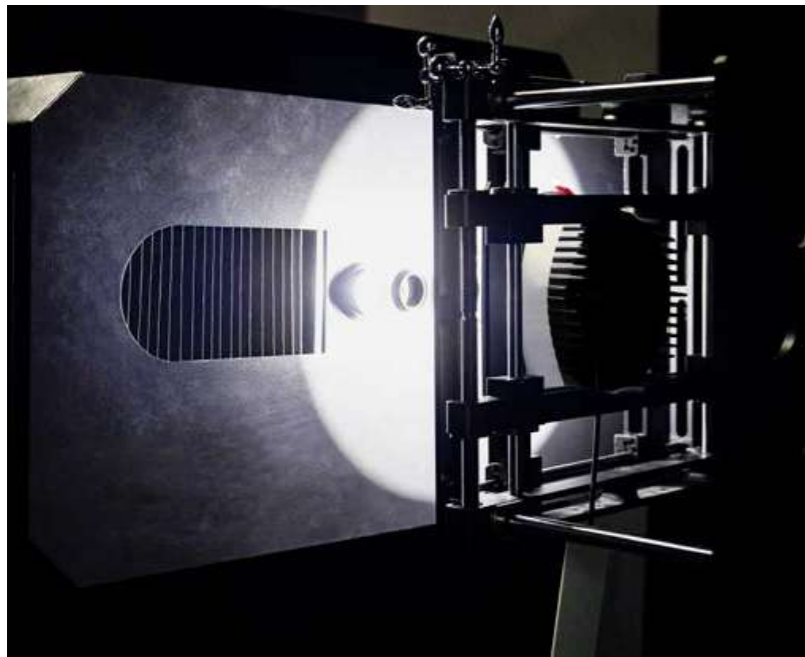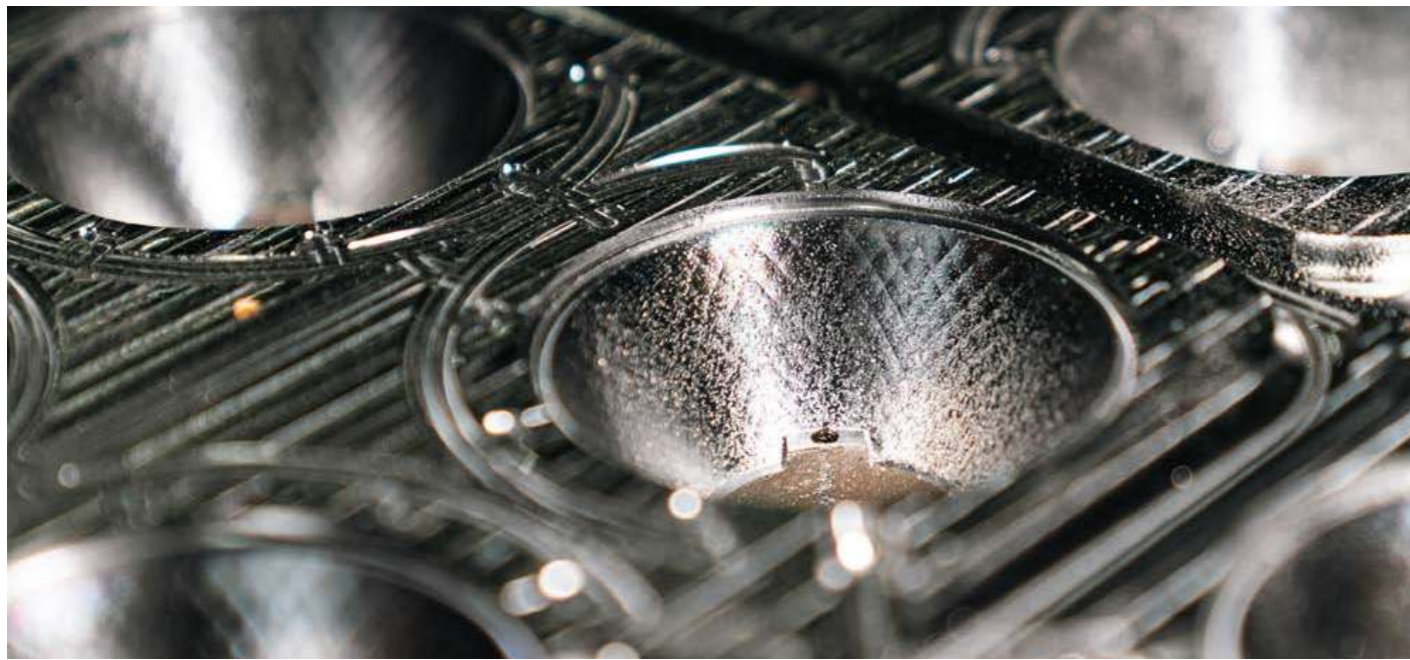


Spec.	Data	Chro.	Set.
E(1x)			2785
Candle E(fc)			258.83
CCT(K)			3830
Ra			96.1
530 (nm) : 4.160 (cd/cd2/rad/m)			

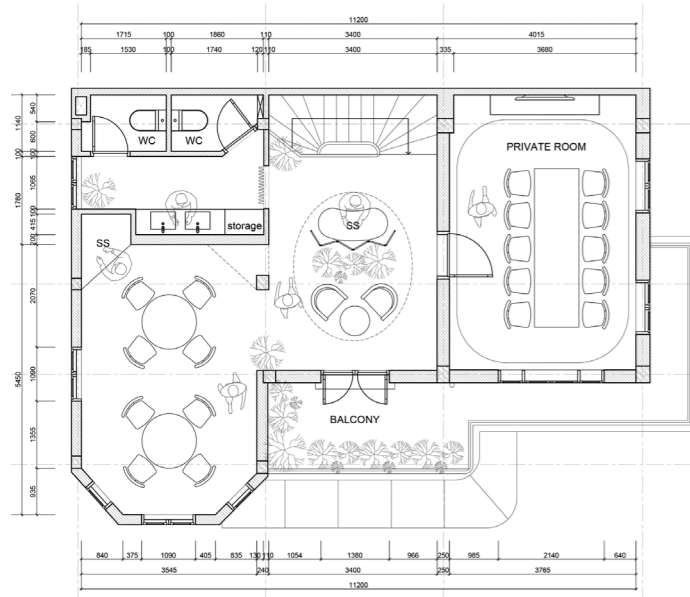

1. Project plan construction drawing

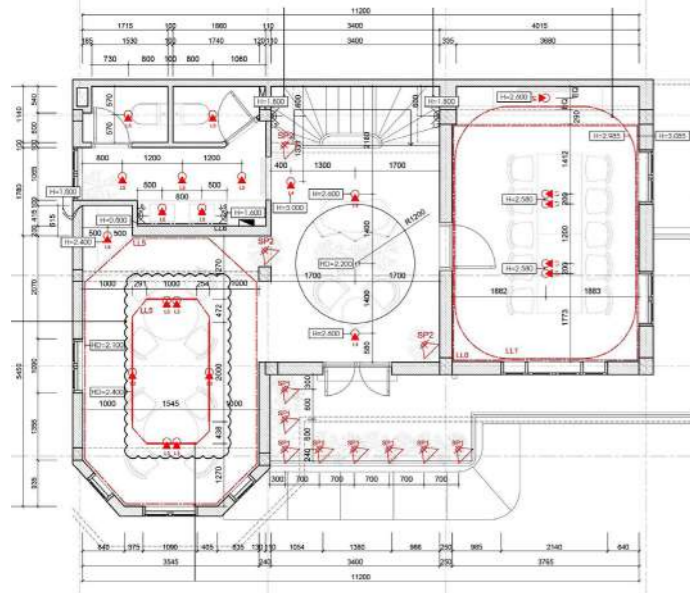

2. Lighting Location

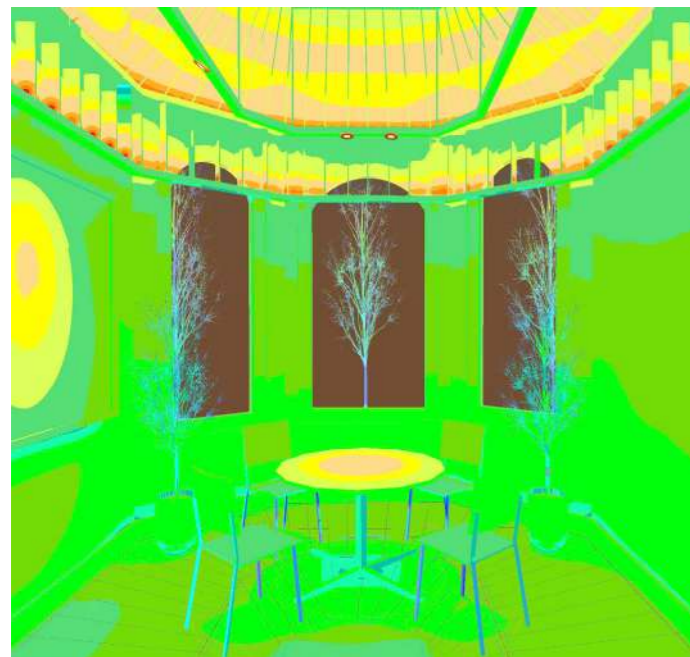

3. Lighting distribution in Dialux



**We Provide
Lighting Solutions**

cabinet

DE35 CG3A CG15 CB01 CG01 CG02 DN03 CG04



G3006 G3008 DS01 DS03 LNR2 LNS2



downlight

CI125 LD2 LD4 LD5 LD5A LD7 DLD7 TL1



ZD1 MD2 MD6 MD4 MD5 MD8 2TY9S TY26



TY12X DZ65 DZ75 AN01 CG14 DB03 DB05 DS05



CB02 DF02 DE01 DZ45 DF05 DB3A DL3809 RD35



RD45 DN01 HD6 MD7 HG GZ2 TD6



gypsum lamp

DH05 DH06 DH07 DH08



ceiling light

MZY10 MZY15 MZY16 MZY18 DE10 DE20 DE30 DE40



DE45 DK TSN42 TSN50 RD35 RD45 CT1 CT3



pendant light

PPL6 HPL1 PPL3



magnetic system



track light



linear light



neon strip



inground light



bollard light



spot light



wall light



wall light



step light



reading light



underwater light



wall washer light






Cabinet lights are recessed and perfect for providing light in display cases, kitchens, cabinets, restaurant, millwork, or in wine cellars. The cabinet light will brighten any space where task or accent lighting is required. The full shroud and half shroud accessories are available to help reduce glare.


cabinet



DE35 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out Φ 35



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

CG3A | Downlight | powerLED 3W



DIMENSION (mm)
Cut out Φ 35



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		



CG15 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out $\Phi 43$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
 > 82

LIFETIME (Ta 25°C)
> 50,000h



Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

CB01 | Downlight | powerLED 5W



DIMENSION (mm)
Cut out $\Phi 55$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	



CG01 | Downlight | powerLED 3W




POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 95

LIFETIME (Ta 25°C)
> 50,000h

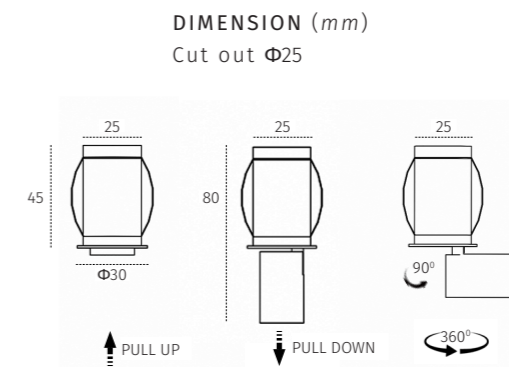

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	

CG02 | Ceiling light | powerLED 3W




POWER SUPPLY
24Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 95

LIFETIME (Ta 25°C)
> 50,000h

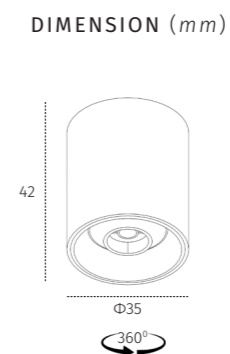

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	



DN03 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out $\Phi 50$

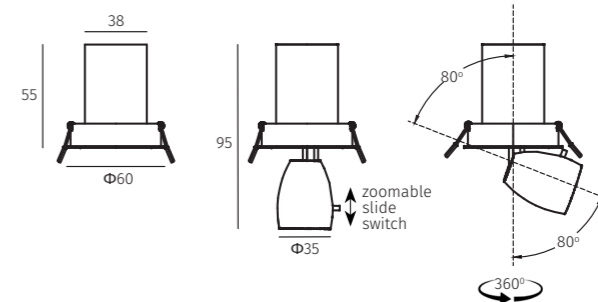

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 9° ~ 50° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

CG04 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out $\Phi 50$

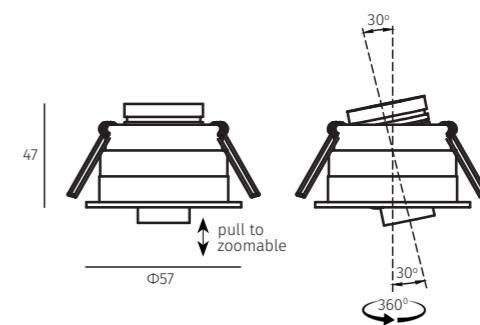

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 90


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 30° zoomable	<input type="checkbox"/> On-off
		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		



G3006 | Ceiling light | powerLED 3W



DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
 > 92 (R9 > 85)

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 25°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

G3008 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out Φ 35



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
 > 92 (R9 > 85)

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	



DS01 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out Φ 18



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>50lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

DS03 | Downlight | powerLED 3W



DIMENSION (mm)
Cut out Φ 35

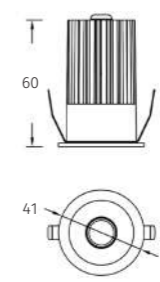

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		




LNR2 | Mini showcase track light | powerLED 2W



POWER SUPPLY
12Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
 > 92 (R9 > 85)

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 25°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		

LNS2 | Mini showcase light | powerLED 2W



POWER SUPPLY
12Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
 > 92 (R9 > 85)

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 25°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		



Recessed downlights can be used to illuminate rooms, auditoriums, hallways. These downlights are simple yet versatile while giving general lighting in the room with minimal glare.


recessed downlight



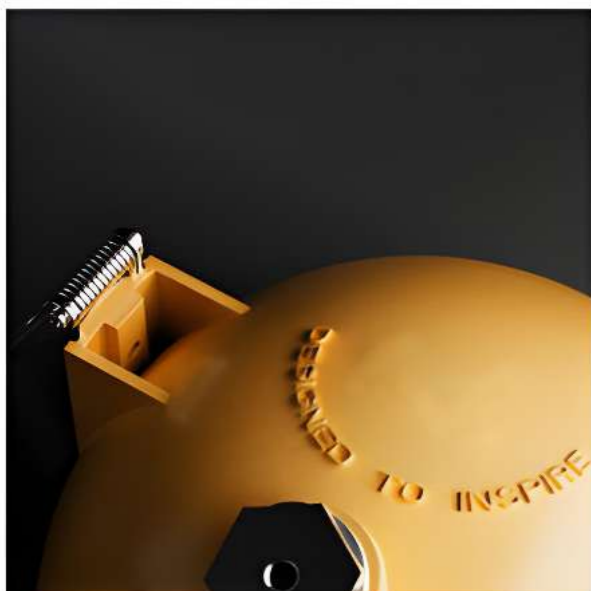



CI125 | Downlight | powerLED 5W ~ 8W



REFLECTOR
with finish color



White - White




White - Black



Gold - Black

DIMENSION (mm)
Cut out Φ 115

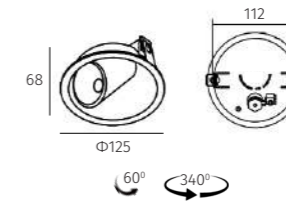

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)



CRI (Ra)
>92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 50°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Gold	<input type="checkbox"/> 8W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming

- Multi-configuration design for ceilings, walls, and angled installations.
- Precision-engineered glare control with smooth omni angle 340 degree.

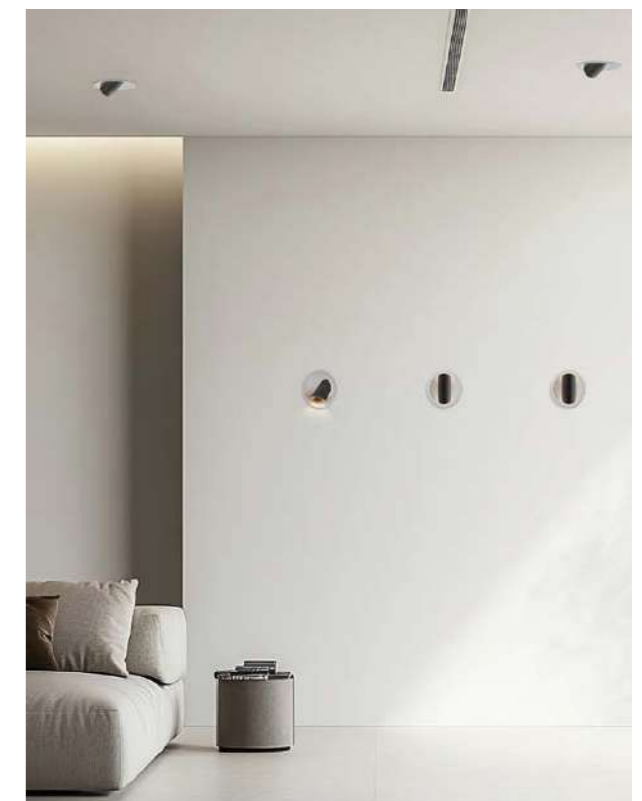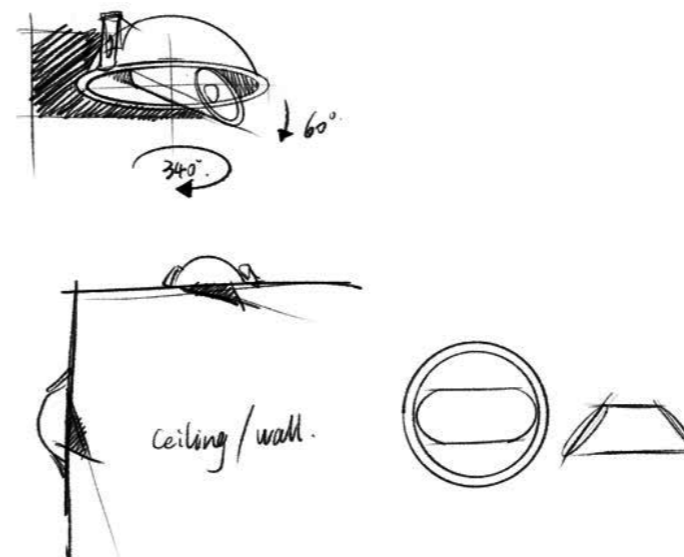



LD2 | Downlight | powerLED 6W ~ 15W



REFLECTOR
with finish color



White




Black



Honeycomb lens

DIMENSION (mm)
Cut out $\Phi 75$

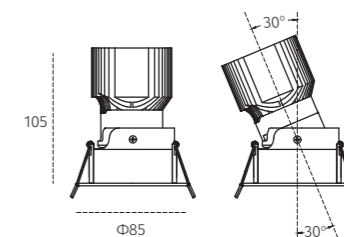

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
98 (R9>94)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

LD4 | Downlight | powerLED 6W ~ 15W



REFLECTOR
with finish color



White




Black



Honeycomb lens

DIMENSION (mm)
Cut out $\Phi 75$

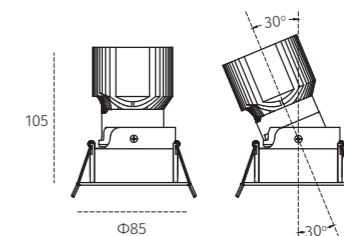

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
98 (R9>94)


LIFETIME (Ta 25°C)
> 50,000h

Key Information




Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		




LD5 | Downlight | powerLED 6W ~ 15W



REFLECTOR
with finish color

-  White
-  Black
-  Honeycomb lens

DIMENSION (mm)
Cut out $\Phi 75$

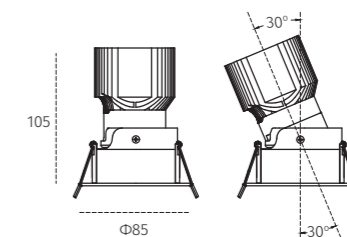

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
98 (R9>94)

LIFETIME (Ta 25°C)
> 50,000h




Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		


LD5A | Downlight | powerLED 6W ~ 15W



REFLECTOR
with finish color

-  White
-  Black
-  Honeycomb lens

DIMENSION (mm)
Cut out $\Phi 75$

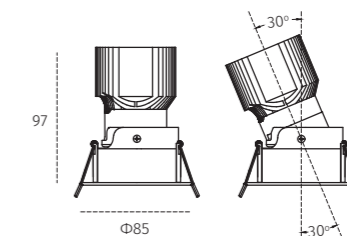

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
98 (R9>94)


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



LD7 | Downlight | powerLED 6W ~ 15W



REFLECTOR
with finish color



White




Black



Honeycomb lens

DIMENSION (mm)
Cut out 75x75

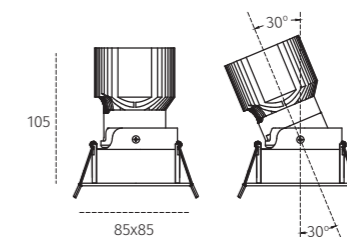

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
98 (R9>94)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

DLD7 | Downlight | powerLED 2x6W ~ 2x15W



REFLECTOR
with finish color



White




Black



Honeycomb lens

DIMENSION (mm)
Cut out 75x145

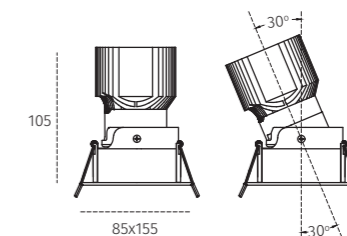

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
98 (R9>94)


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2x6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 2x8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 2x10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 2x12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 2x15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



TL1 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 70$

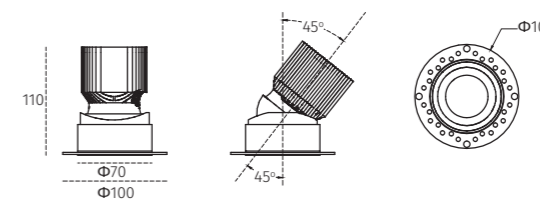

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
98 (R9>94)

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

ZD1 | Downlight | powerLED 15W ~ 20W



DIMENSION (mm)
Cut out $\Phi 75$

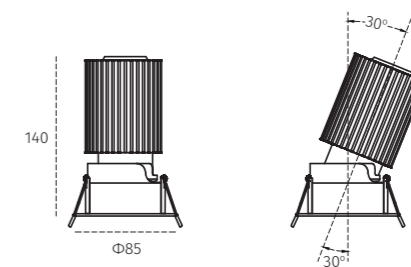

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°~ 60° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



MD2 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 75$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h



Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

MD6 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 85$

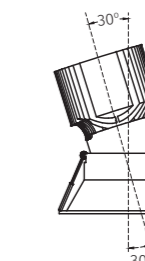

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



MD4 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 75$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h



Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

MD5 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 75$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



MD8 | Downlight | powerLED 6W ~ 15W



DIMENSION (mm)
Cut out $\Phi 95-100$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h



Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

2TY9S | Downlight | powerLED 6W ~ 12W



DIMENSION (mm)
Cut out $\Phi 75$

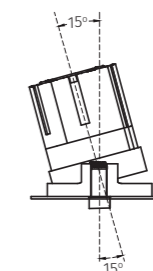

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming




TY26 | Downlight | powerLED 6W ~ 8W



REFLECTOR
with finish color

- W_White
- W_Black Mirror
- B_Black Mirror

DIMENSION (mm)
Cut out Φ 55-60

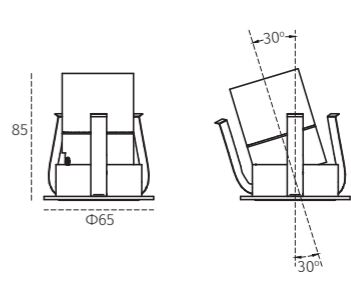

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming


TY12X | Downlight | powerLED 6W ~ 12W



REFLECTOR
with finish color

- W_White
- W_Black Mirror
- B_Black Mirror

DIMENSION (mm)
Cut out Φ 75

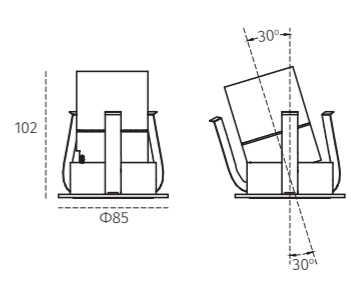

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming



DZ65 | Downlight | powerLED 6W ~ 8W



DIMENSION (mm)
Cut out $\Phi 48$

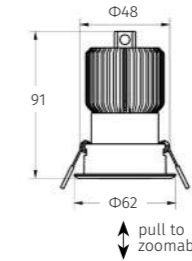

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		

DZ75 | Downlight | powerLED 6W ~ 8W



DIMENSION (mm)
Cut out $\Phi 72$

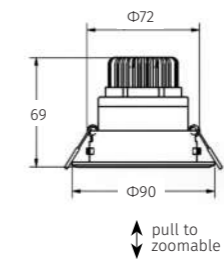

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K-6500K (Tunable White)		
		<input type="checkbox"/> 3000K-1800K (Dim to warm)		



AN01 | Downlight | powerLED 5W ~ 7W



DIMENSION (mm)
Cut out $\Phi 75$

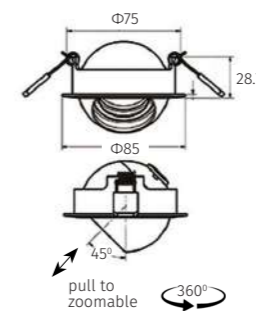

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 12° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

CG14 | Downlight | powerLED 5W ~ 7W



DIMENSION (mm)
Cut out $\Phi 65$

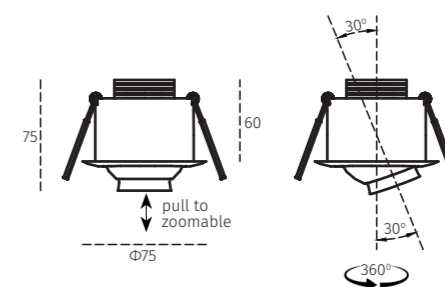

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 12° ~ 40° zoomable	<input type="checkbox"/> On-off
	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



Mini small hole spotlights

Small lamp body with high power suitable for low and ceiling suspension


DB03 | Downlight | powerLED 6W ~ 8W



REFLECTOR
with finish color



DIMENSION (mm)
Cut out $\Phi 35$

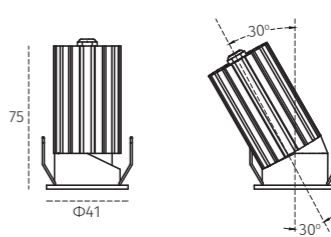

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
95

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming


DB05 | Downlight | powerLED 6W ~ 12W



REFLECTOR
with finish color



DIMENSION (mm)
Cut out $\Phi 55$

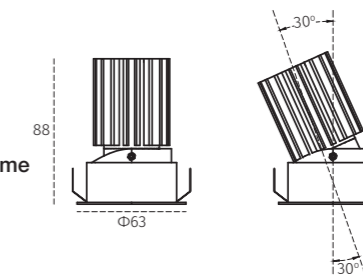

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
95


LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming



DS05 | Downlight | powerLED 6W ~ 8W



DIMENSION (mm)
Cut out $\Phi 55$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
95

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

CB02 | Downlight | powerLED 6W ~ 12W



DIMENSION (mm)
Cut out $\Phi 95$



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



DF02 | Downlight | powerLED 8W ~ 15W



DIMENSION (mm)
Cut out $\Phi 85$

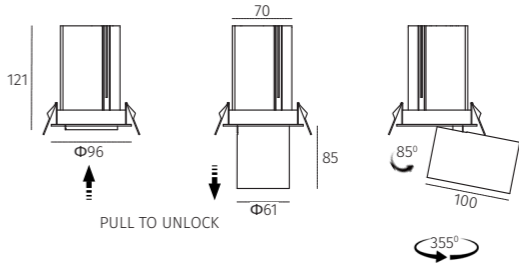

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming

DE01 | Downlight | powerLED 8W ~ 10W



DIMENSION (mm)
Cut out $\Phi 55$

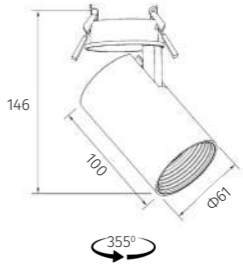

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming



DZ45 | Downlight | powerLED 5W ~ 8W

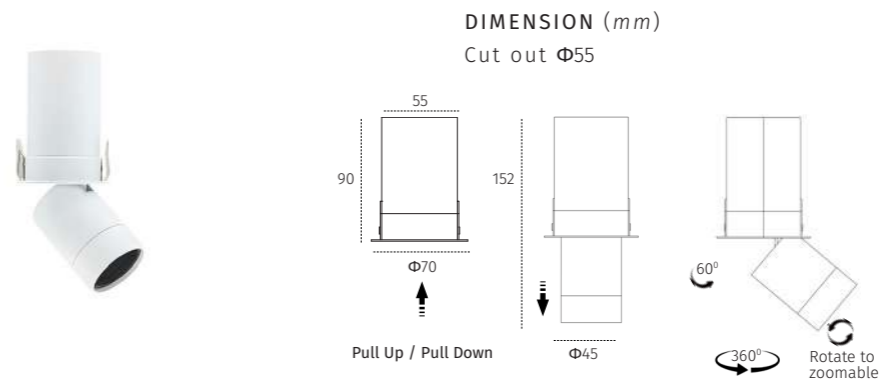

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
> 95

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 8W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

DF05 | Downlight | powerLED 6W

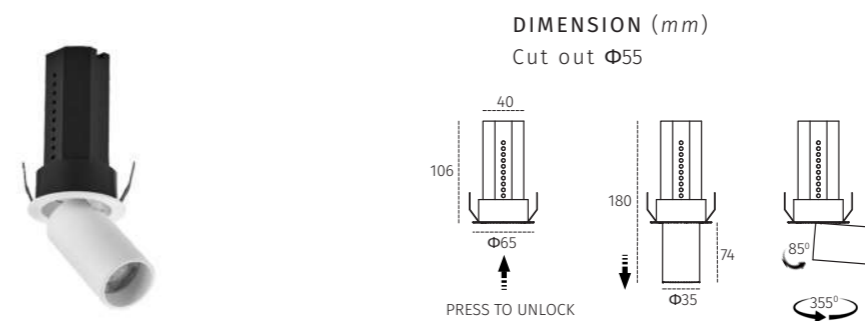

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



RD35 | Downlight | powerLED 5W ~ 7W



REFLECTOR
with finish color

- White
- Black
- Brushed Copper
- Brushed Silver

DIMENSION (mm)
Cut out $\Phi 35$

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Brushed Silver		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
<input type="checkbox"/> Brushed Copper		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

RD45 | Downlight | powerLED 8W ~ 15W



REFLECTOR
with finish color

- White
- Black
- Brushed Copper
- Brushed Silver

DIMENSION (mm)
Cut out $\Phi 45$

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Brushed Silver	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
<input type="checkbox"/> Brushed Copper	<input type="checkbox"/> 15W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



DB3A | Downlight | powerLED 6W ~ 12W



DIMENSION (mm)
Cut out $\Phi 75$

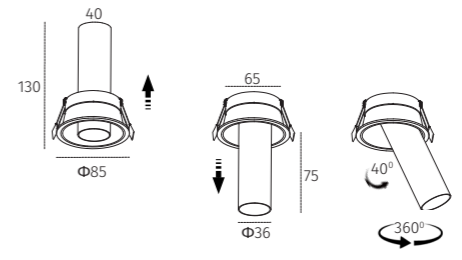

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming


DL3809 | Downlight | powerLED 6W ~ 10W



REFLECTOR
with finish color

- White
- Black
- Brushed Silver
- Light Bronze

DIMENSION (mm)
Cut out $\Phi 70$

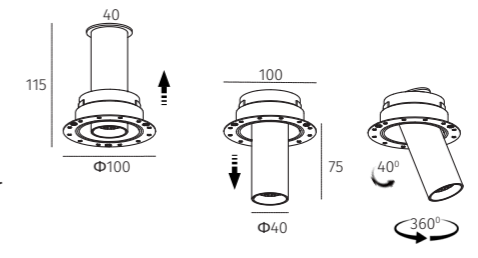

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Brushed Silver	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
<input type="checkbox"/> Light Bronze		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming




DN01 | Downlight | powerLED 8W ~ 10W



Waterproof Downlight
IP65



DIMENSION (mm)
Cut out $\Phi 75$

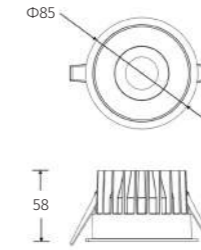

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming

HD6 | Downlight | powerLED 15W ~ 20W



DIMENSION (mm)
Cut out $\Phi 80$

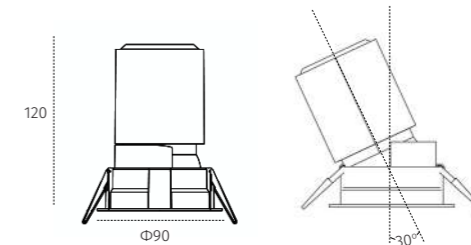

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 97

LIFETIME (Ta 25°C)
> 50,000h

Key Information



Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 18°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 50°	<input type="checkbox"/> DALI dimming



MD7 | Downlight | powerLED 8W ~ 15W



DIMENSION (mm)
Cut out 85x85

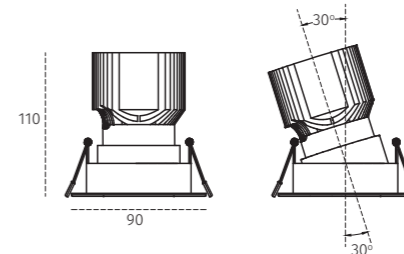

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 15W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming

HG | Downlight | powerLED 6x2W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6x2W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



GZ2 | Downlight | powerLED 2x8W ~ 2x12W



DIMENSION (mm)
Cut out 75x155

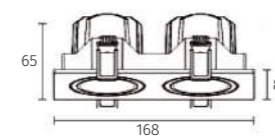

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2x8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 36°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 2x10W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 2x12W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

TD6 | Downlight | powerLED 2x8W ~ 2x15W



DIMENSION (mm)
Cut out 100x195

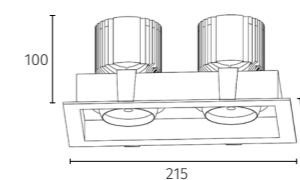

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 2x8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 2x10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 2x12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 2x15W	<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming



Gypsum lamp lighting refers to lighting fixtures crafted from gypsum that offer a unique blend of functionality and aesthetic appeal. These fixtures are known for their smooth, customizable designs and their ability to integrate seamlessly into various interior styles.

The main types of gypsum lamps:

- Recessed gypsum ceiling lamps
- Recessed gypsum wall lamp
- Surface-mounted ceiling & wall lamps


Gypsum Lamp

Trimless Design for Gypsum lamp series






DH05 | Downlight | powerLED 6W ~ 10W



DIMENSION (mm)
Cut out $\Phi 150$

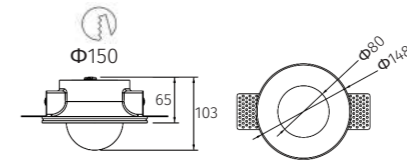

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>35lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W <input type="checkbox"/> 8W <input type="checkbox"/> 10W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 3000K-1800K (Dim to warm)	<input type="checkbox"/> 180°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming

DH06 | Downlight | powerLED 6W ~ 12W



DIMENSION (mm)
Cut out $\Phi 150$

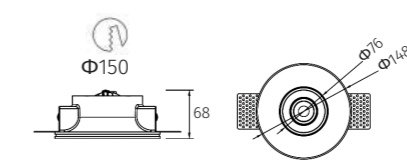

POWER SUPPLY
220Vac, 50Hz


LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W <input type="checkbox"/> 8W <input type="checkbox"/> 10W <input type="checkbox"/> 12W	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming

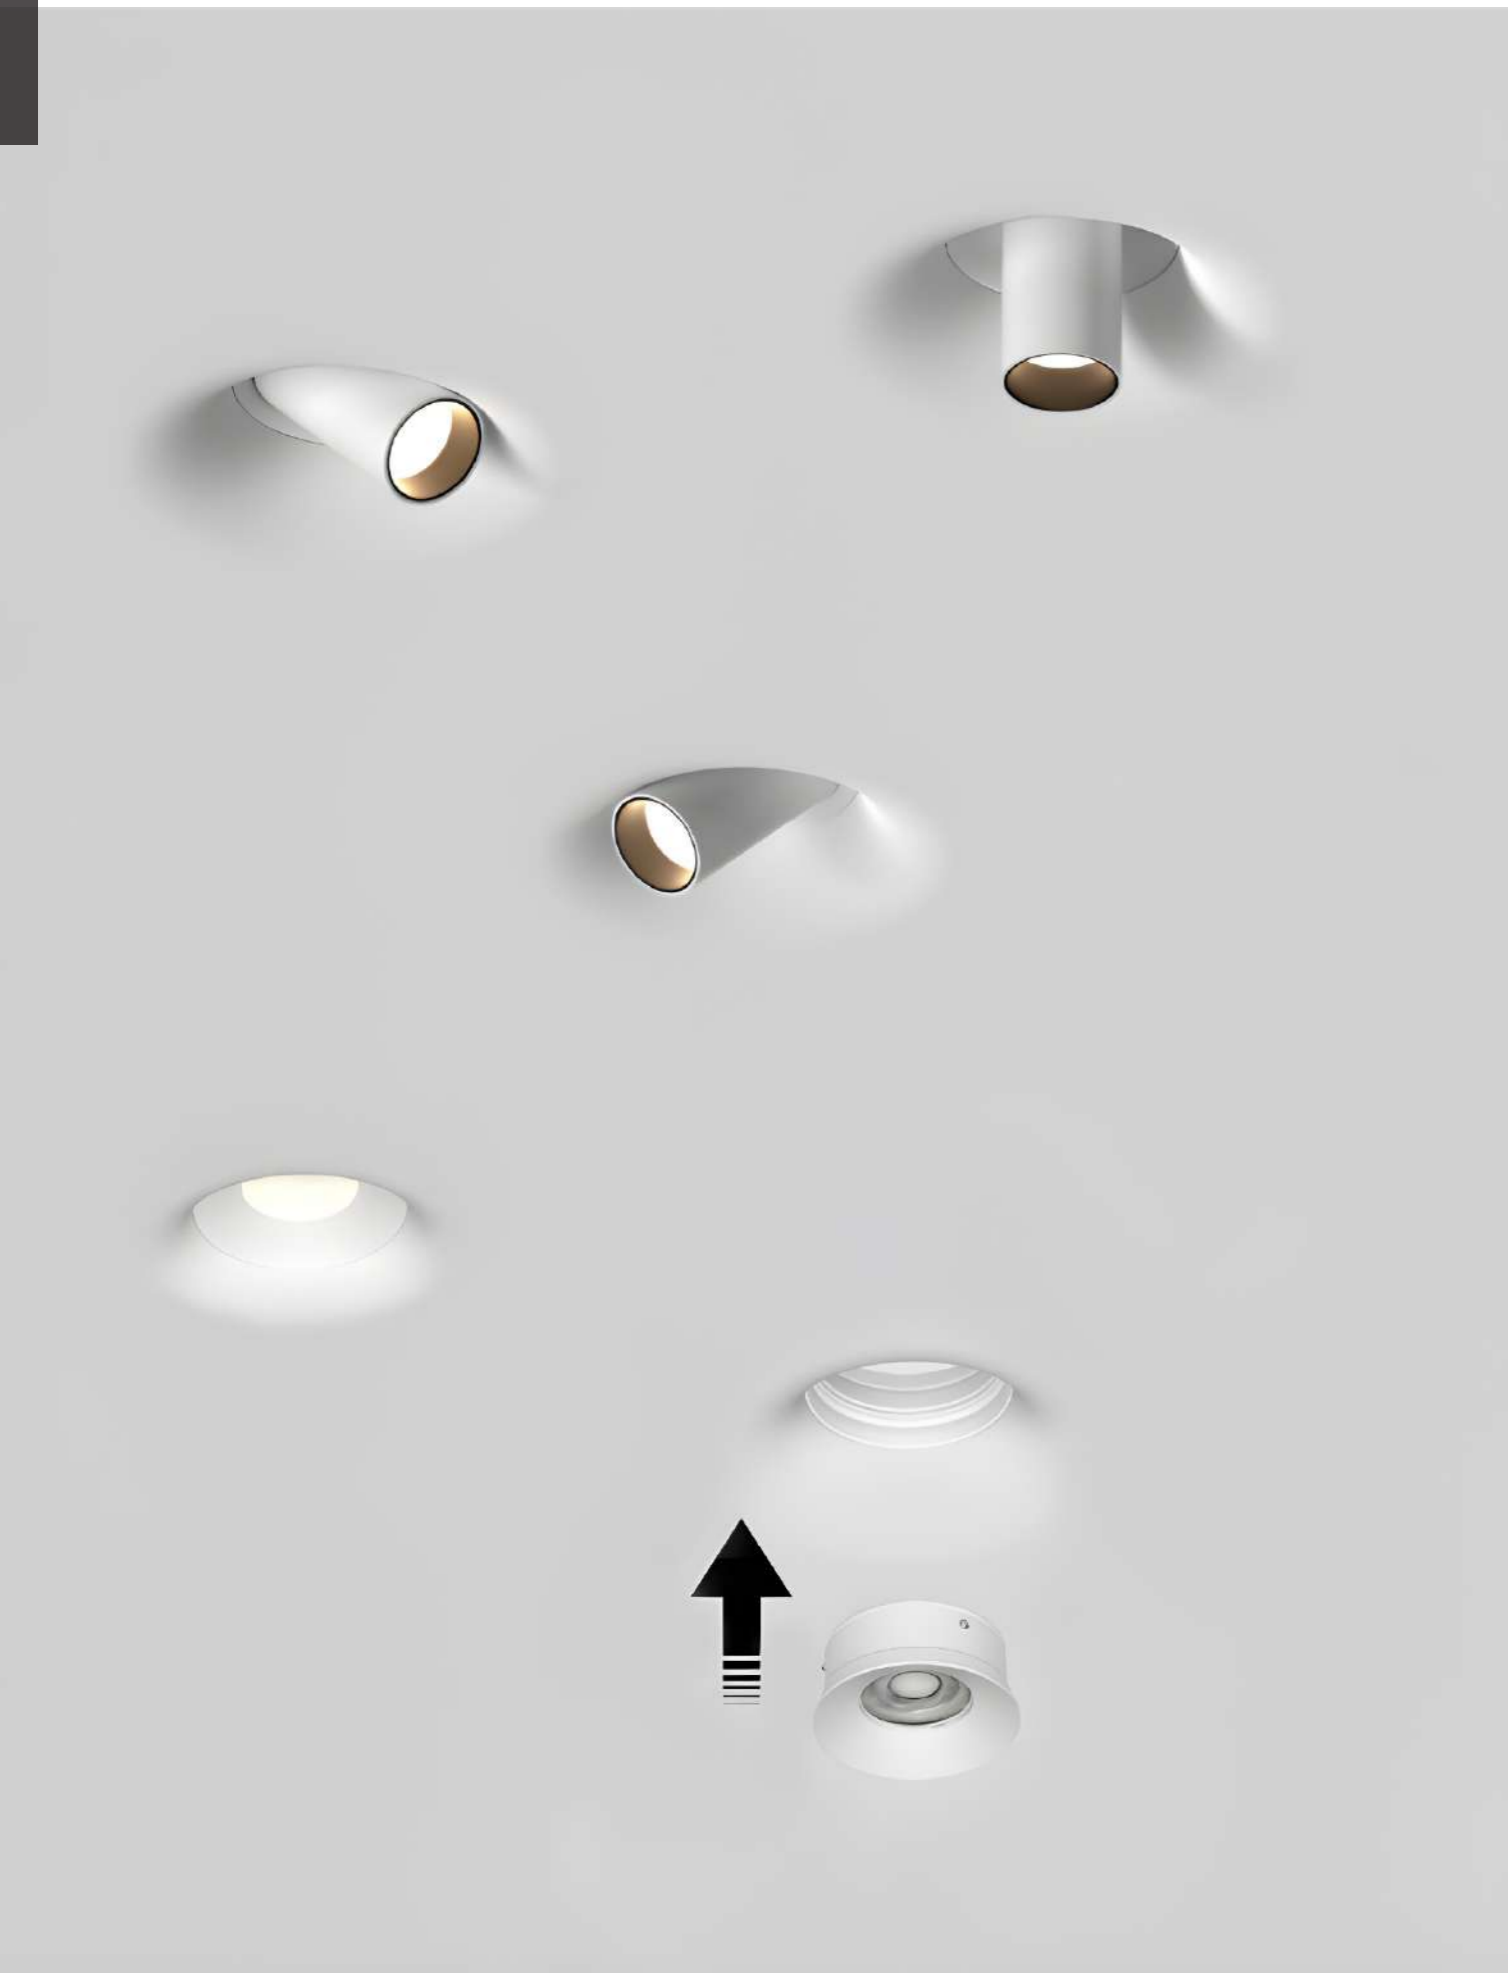

DH07 | Downlight | powerLED 6W ~ 10W



DIMENSION (mm)
Cut out $\Phi 150$

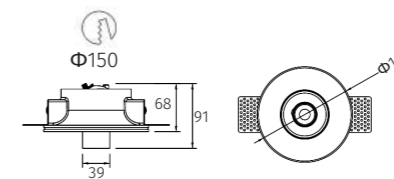

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

DH08 | Downlight | powerLED 6W ~ 10W



DIMENSION (mm)
Cut out $\Phi 150$

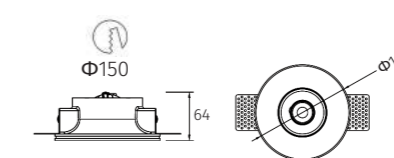

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming





The interior downlight is intended for lighting hallways, office spaces, auditoriums, hotels and residential settings. Surface mounted downlights provide an overall illumination while complementing the room with its minimal clean lines and modern style. It is efficient and guarantees the maximum light output.


ceiling light



MZY10 | Ceiling light | powerLED 5W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

MZY15 | Ceiling light | powerLED 8W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



MZY16 | Ceiling light | powerLED 6W ~ 10W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 20°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

MZY18 | Ceiling light | powerLED 12W ~ 15W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 97

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°	<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K	<input type="checkbox"/> 60°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



DE10 | Ceiling light | powerLED 6W ~ 10W



DIMENSION (mm)

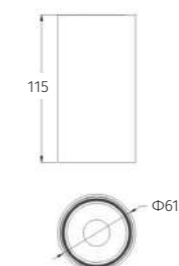

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming

DE20 | Ceiling light | powerLED 8W ~ 12W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming



DE30 | Ceiling light | powerLED 5W ~ 8W



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 8W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

DE40 | Ceiling light | powerLED 15W ~ 20W



DIMENSION (mm)

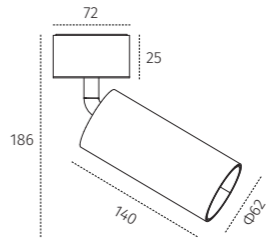

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 97

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DALI dimming
			<input type="checkbox"/> 50°	



DE45 | Ceiling light | powerLED 5W ~ 8W



DIMENSION (mm)

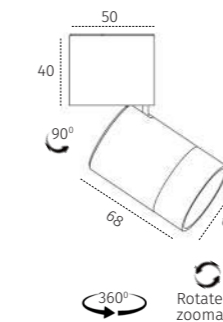

POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>60lm/W (at 3000K)

CRI (Ra)

> 95

LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 8W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

DK | Ceiling light | powerLED 8W ~ 12W



DIMENSION (mm)



POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>70lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)


> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming




TSN42 | Ceiling light | powerLED 5W



Zoomable Ceiling light

DIMENSION (mm)

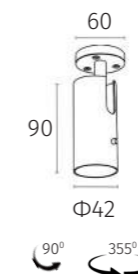

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		
		<input type="checkbox"/> 5000K		

TSN50 | Ceiling light | powerLED 10W



Zoomable Ceiling light

DIMENSION (mm)

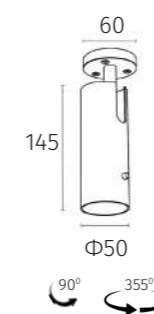

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		
		<input type="checkbox"/> 5000K		




RD35 | Ceiling light | powerLED 5W ~ 7W



REFLECTOR
with finish color

- White
- Black
- Brushed Copper
- Brushed Silver

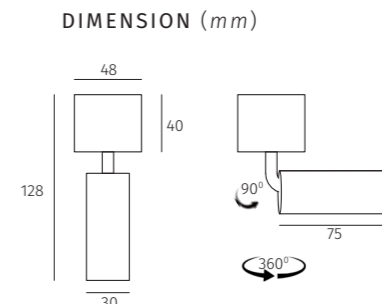

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 >92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Brushed Silver		<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
<input type="checkbox"/> Brushed Copper		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

RD45 | Ceiling light | powerLED 8W ~ 15W



REFLECTOR
with finish color

- White
- Black
- Brushed Copper
- Brushed Silver

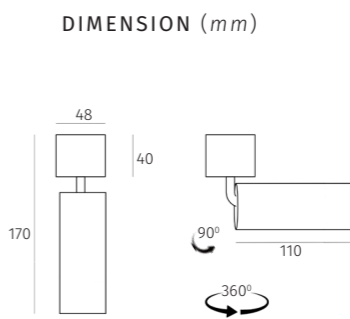

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
<input type="checkbox"/> Brushed Silver	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
<input type="checkbox"/> Brushed Copper	<input type="checkbox"/> 15W	<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



CT1 | Ceiling light | powerLED 6 ~ 10W



DIMENSION (mm)

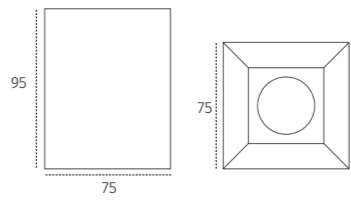

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 36°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

CT3 | Ceiling light | powerLED 6 ~ 10W



DIMENSION (mm)

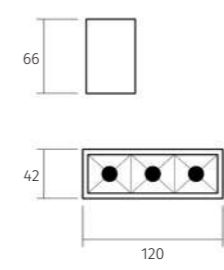

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 30°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming






Luminaires from a ceiling to illuminate a space such as an office, foyer, or dining room. Pendants provide decorative lighting while creating an ambiance in the room. They can be freely arranged to a preferred composition to express the design of the space.

pendant light




PPL6 | Pendant light | powerLED 27W ~ 36W

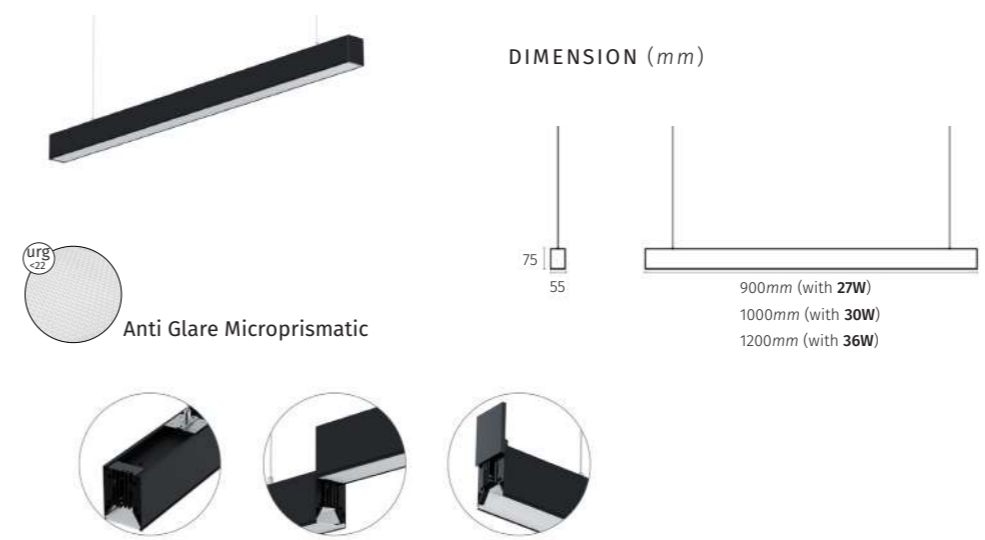

 Anti Glare Microprismatic

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>80lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 27W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 30W	<input type="checkbox"/> 4000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 36W	<input type="checkbox"/> 6000K		<input type="checkbox"/> 0-10V dimming
				<input type="checkbox"/> DALI dimming



Office lighting
Light and shadow art
lighting up the excitement of light

SmartLink Series

.....

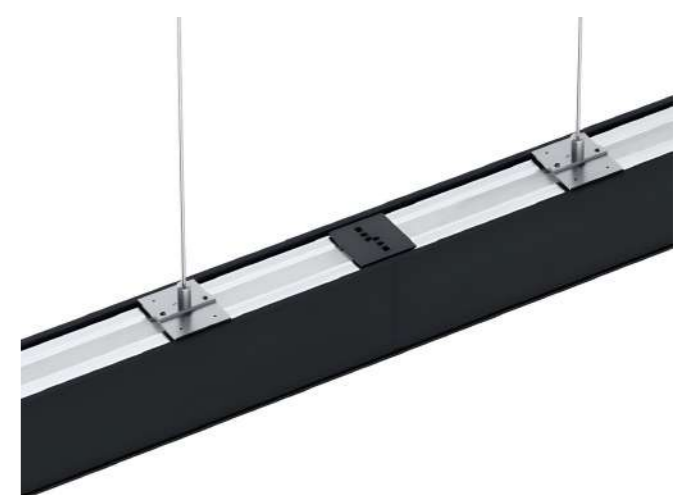




HPL1 | Pendant light | powerLED 48W



DIMENSION (mm)

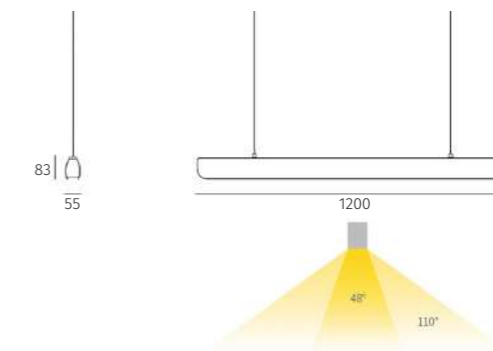

POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>110lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 48W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 110° 48°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 6000K		<input type="checkbox"/> 0-10V dimming
				<input type="checkbox"/> DALI dimming

PPL3 | Pendant light | powerLED 24W



DIMENSION (mm)

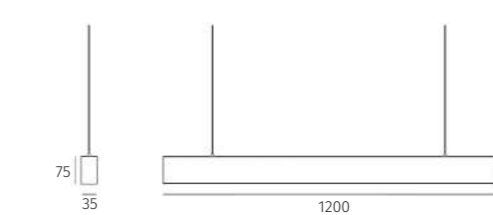

POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>80lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)

> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 24W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 110°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 6000K		<input type="checkbox"/> 0-10V dimming
				<input type="checkbox"/> DALI dimming



Linear strip lights available in custom lengths produce light on a ceiling or surface. They provide beautiful lighting effects and can be installed in ceiling coves, wall slots, cabinets, and under benches. The linear products create an inviting ambiance and can be used to improve safety. They are versatile in mounting options – suspended, surface mount and recessed.

linear light



LLCOB | Linear light | powerLED 5W/m ~ 15W/m



DIMENSION (mm)
maximum length with 5000mm



IP rating



IP20 **IP67**

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>90lm/W (at 3000K)



CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 5W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off	<input type="checkbox"/> LSM-1507 (SURFACE MOUNT) ALU-PROFILE
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming	<input type="checkbox"/> LSM-1616 (SURFACE MOUNT) ALU-PROFILE
<input type="checkbox"/> 15W/m	<input type="checkbox"/> 4000K <input type="checkbox"/> 6000K		<input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> LSM-2207 (RECESSED) ALU-PROFILE


LLCOB | Linear light | Free Cut | powerLED 5W/m

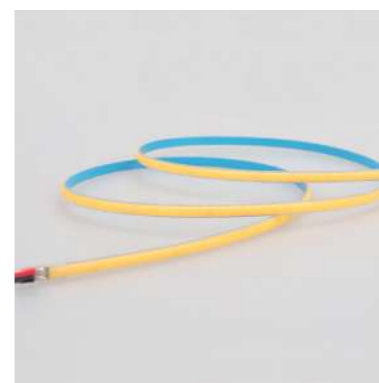

DIMENSION (mm)
maximum length with 5000mm



IP rating



IP20

POWER SUPPLY
24Vdc


LUMEN EFFICACY
>100lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information



Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 5W/m	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> LSM-0809 (SURFACE MOUNT) ALU-PROFILE

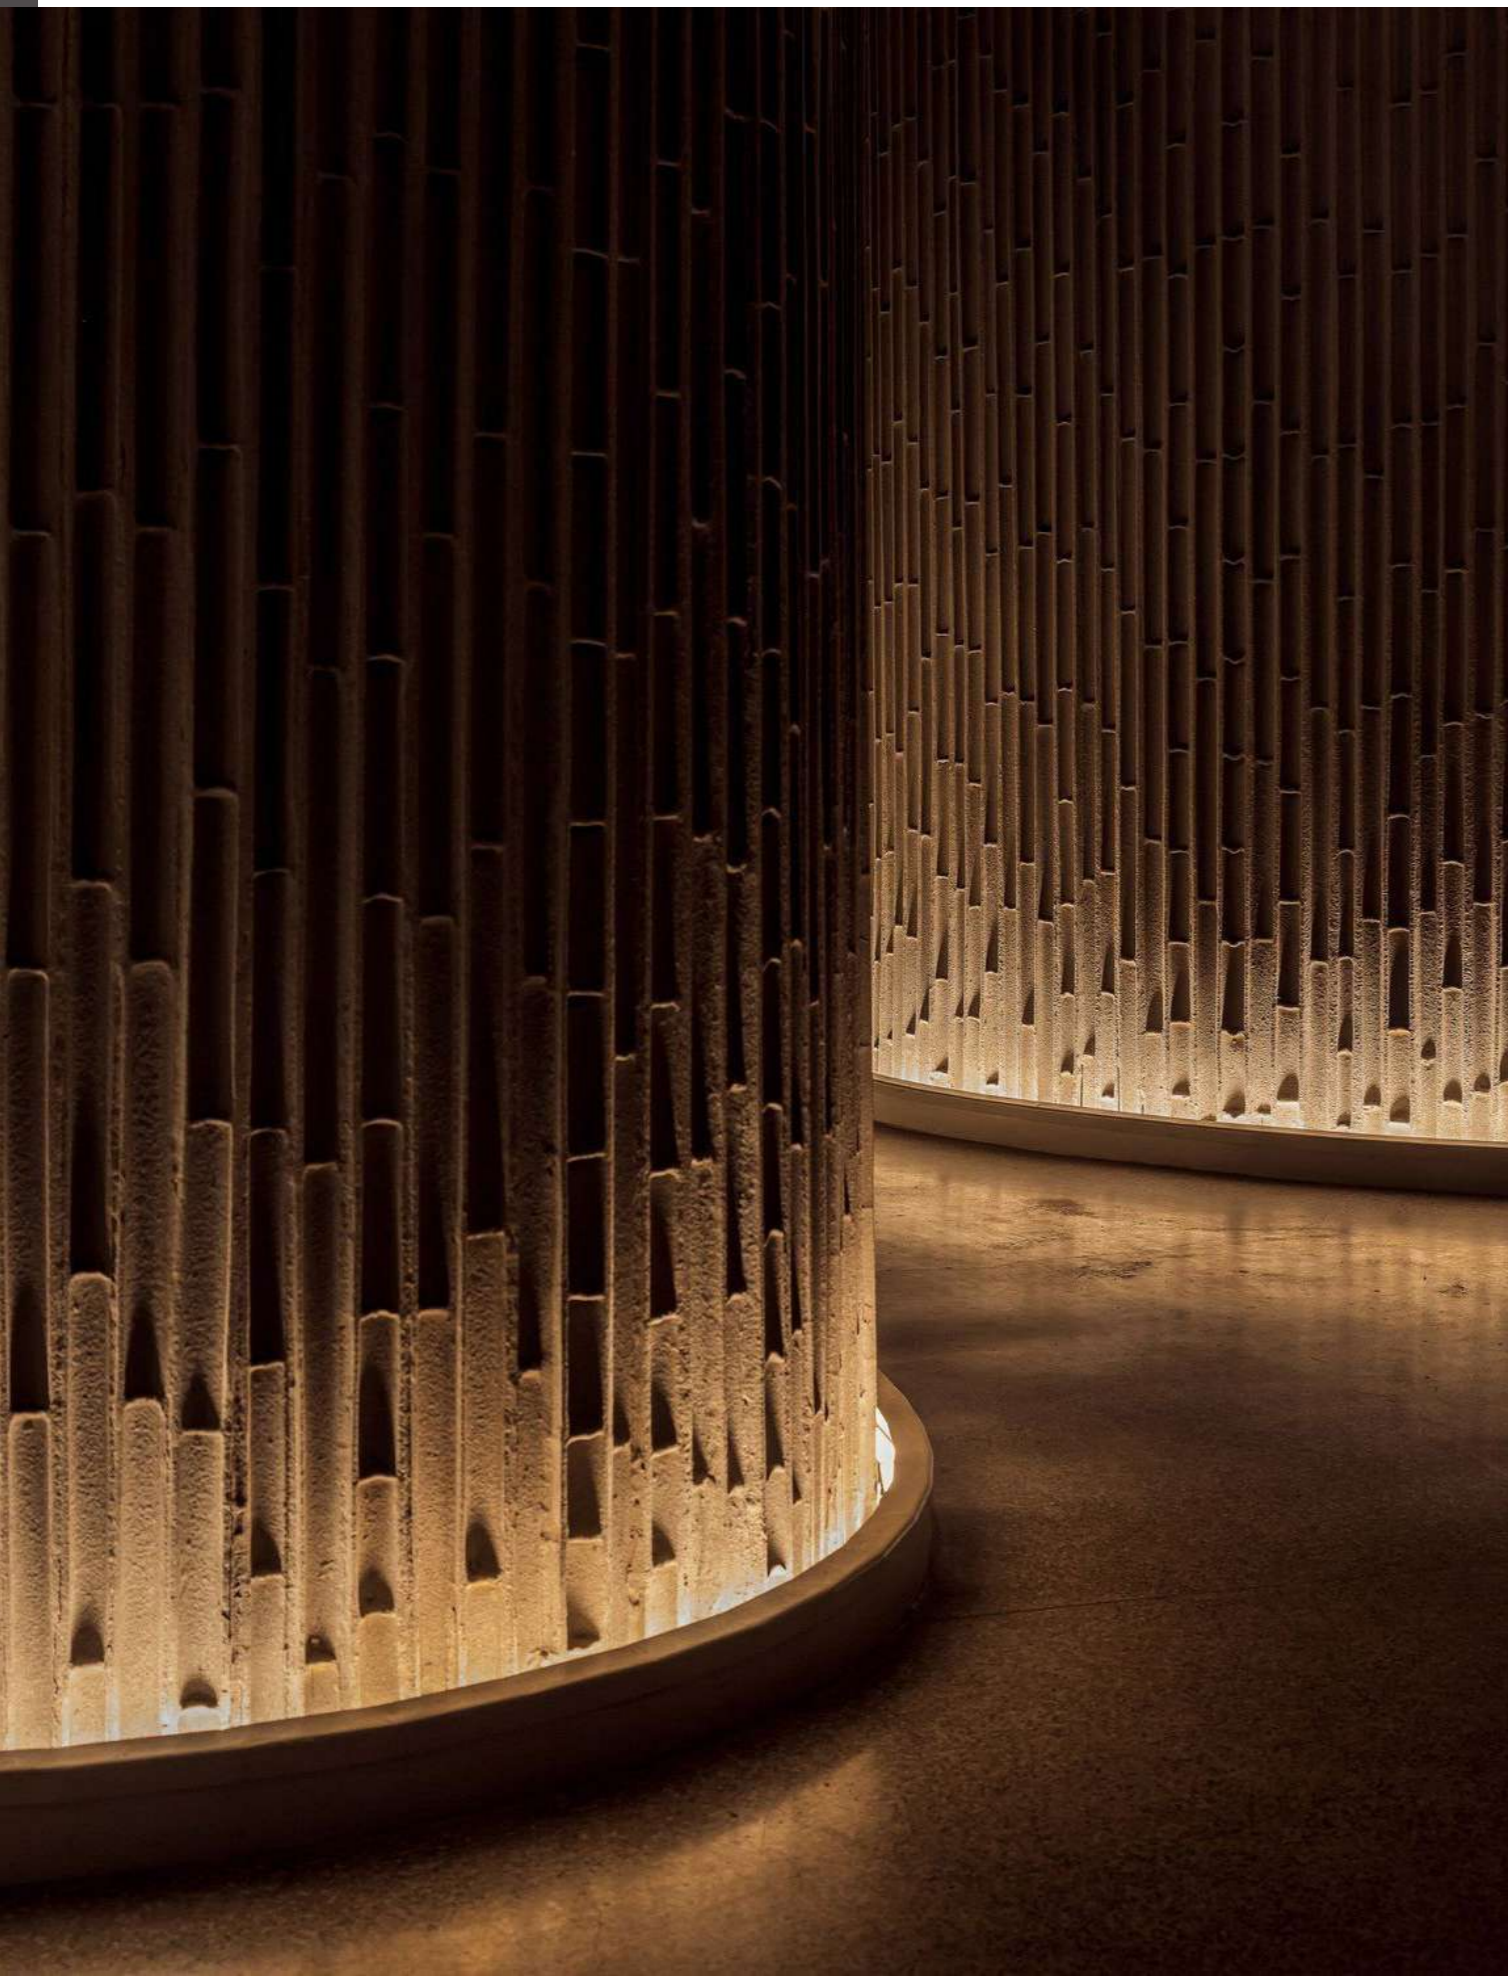

FW2527 | Wall washer light | powerLED 24W/m



DIMENSION (mm)
maximum length with 2000mm

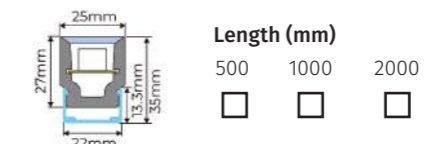

Length (mm)

500	1000	2000
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
 > 80

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 24W/m	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 20°x55°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> MC-2527 <i>(SURFACE MOUNT)</i> MOUNTING CLIP <input type="checkbox"/> AF-2527 <i>(CURVED STAINLESS)</i> FLEXIBLE ALU-PROFILE

LL3528 | Linear light | powerLED 9.6W/m



DIMENSION (mm)
maximum length with 5000mm

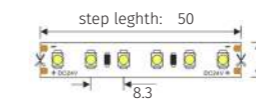

IP rating



IP20 **IP67**

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>80lm/W (at 3000K)

CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 9.6W/m	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 6000K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> LSM-1507 <i>(SURFACE MOUNT)</i> ALU-PROFILE <input type="checkbox"/> LSM-1616 <i>(SURFACE MOUNT)</i> ALU-PROFILE <input type="checkbox"/> LSM-2207 <i>(RECESSED)</i> ALU-PROFILE




LLCOB | Linear light | powerLED 15W/m **RGB** [3 in 1]



DIMENSION (mm)
maximum length with 5000mm



IP rating






IP20

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>45lm/W

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	Accessory
<input type="checkbox"/> 15W/m	<input type="checkbox"/> RGB	<input type="checkbox"/> 120°	<input type="checkbox"/> LSM-1507 (SURFACE MOUNT) ALU-PROFILE 
_Control gear: DMX Control system WIFI + RF Control system			<input type="checkbox"/> LSM-1616 (SURFACE MOUNT) ALU-PROFILE 
			<input type="checkbox"/> LSM-2207 (RECESSED) ALU-PROFILE 


LLCOB | Linear light | powerLED 5W/m - 16W/m **RGBW** [4 in 1]



DIMENSION (mm)
maximum length with 5000mm



IP rating






IP20

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>80lm/W (at W=3000K)

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Power	CCT	Beam	Accessory
<input type="checkbox"/> 5W/m	<input type="checkbox"/> RGBW (W=2700K)	<input type="checkbox"/> 120°	<input type="checkbox"/> LSM-1507 (SURFACE MOUNT) ALU-PROFILE 
<input type="checkbox"/> 16W/m	<input type="checkbox"/> RGBW (W=3000K) <input type="checkbox"/> RGBW (W=4000K)		<input type="checkbox"/> LSM-1616 (SURFACE MOUNT) ALU-PROFILE 
_Control gear: DMX Control system WIFI + RF Control system			<input type="checkbox"/> LSM-2207 (RECESSED) ALU-PROFILE 



LL5050 | Linear light | powerLED 14.4W/m **RGB** [3 in 1]



DIMENSION (mm)
maximum length with 5000mm

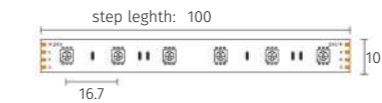

IP rating



IP20 **IP67**

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>50lm/W

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Power	CCT	Beam	Accessory
<input type="checkbox"/> 14.4W/m	<input type="checkbox"/> RGB	<input type="checkbox"/> 120°	<input type="checkbox"/> LSM-1507 (SURFACE MOUNT) ALU-PROFILE <input type="checkbox"/> LSM-1709 (SURFACE MOUNT) ALU-PROFILE
_Control gear: DMX Control system WIFI + RF Control system			

LL5050 | Linear light | powerLED 19.2W/m **RGBW** [4 in 1]



DIMENSION (mm)
maximum length with 5000mm

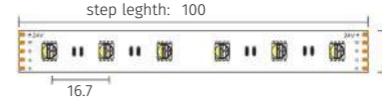

IP rating



IP20 **IP67**

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>60lm/W (at W=3000K)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	Accessory
<input type="checkbox"/> 19.2W/m	<input type="checkbox"/> RGBW (W=2700K) <input type="checkbox"/> RGBW (W=3000K) <input type="checkbox"/> RGBW (W=4000K)	<input type="checkbox"/> 120°	<input type="checkbox"/> LSM-1507 (SURFACE MOUNT) ALU-PROFILE <input type="checkbox"/> LSM-1709 (SURFACE MOUNT) ALU-PROFILE <input type="checkbox"/> LSM-1810 (SURFACE MOUNT) ALU-PROFILE
_Control gear: DMX Control system WIFI + RF Control system			



Fabricated by the new silicon integrated extrusion molding technique, using first-class, eco-friendly, UV-resistant silicon material, with uniform and soft luminance, spot-free, high brightness, can be widely used for indoor and outdoor stylish design, like corridors, roof corners and other places of decorative lighting.


neon strip



NET1010 | LED Neon | powerLED 5W/m ~ 10W/m



DIMENSION (mm)

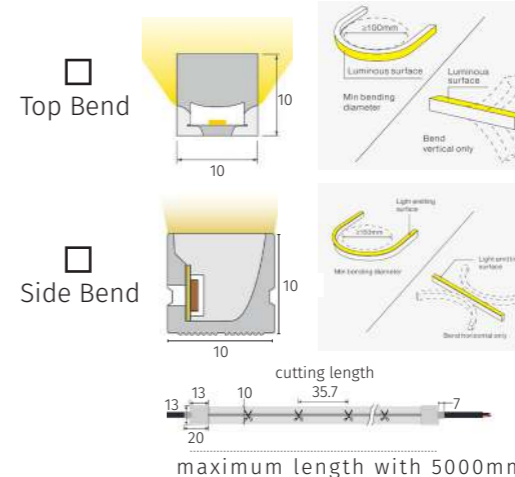

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 5W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off	<input type="checkbox"/> MC-1010 (SURFACE MOUNT) MOUNTING CLIP
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K		<input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> AP-1010 (SURFACE MOUNT) ALU-PROFILE

NES1220 | LED Neon - Side bend | powerLED 5W/m ~ 15W/m



DIMENSION (mm)

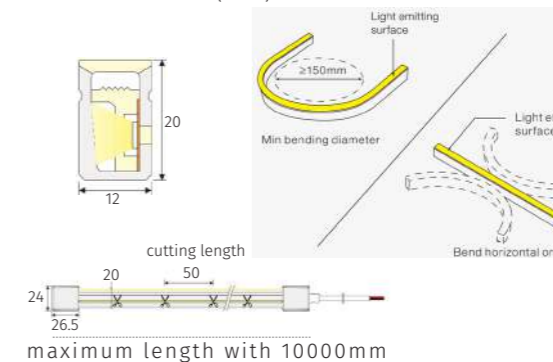

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>50lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 5W/m	<input type="checkbox"/> 2700K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off	<input type="checkbox"/> MC-1220 (SURFACE MOUNT) MOUNTING CLIP
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> AP-1220 (SURFACE MOUNT) ALU-PROFILE
<input type="checkbox"/> 15W/m	<input type="checkbox"/> 4000K			

NS1617 | LED Neon - Side bend | powerLED 10W/m

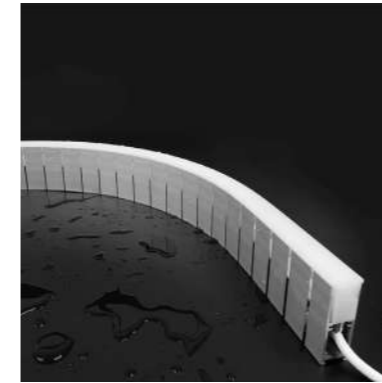

DIMENSION (mm)

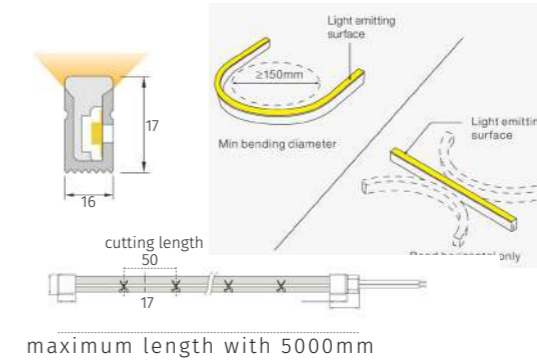





POWER SUPPLY
24Vdc

LUMEN EFFICACY
>11lm/W (at 3000K)


CRI (Ra)
 > 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 10W/m	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> AP-1617 (SURFACE MOUNT) ALU-PROFILE   <input type="checkbox"/> AF-1617 (CURVED STAINLESS) FLEXIBLE ALU-PROFILE  

NS360 | LED Neon - 360 degree | powerLED 5W/m ~ 10W/m



DIMENSION (mm)

maximum length with 5000mm

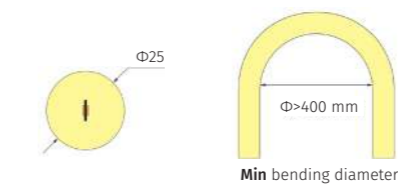




POWER SUPPLY
24Vdc

LUMEN EFFICACY
>50lm/W (at 3000K)

CRI (Ra)
 > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	LED-Driver	Accessory
<input type="checkbox"/> 5W/m <input type="checkbox"/> 10W/m	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 360°	<input type="checkbox"/> On-off <input type="checkbox"/> Triac dimming <input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming	<input type="checkbox"/> PC-360D PC TRANSPARENT CLIP  <input type="checkbox"/> PK-360D PENDANT KIT  <input type="checkbox"/> PK-360D ENDCAP 



NES1220 | LED Neon - Side bend | powerLED 10W/m ~ 15W/m **RGB** [3 in 1]

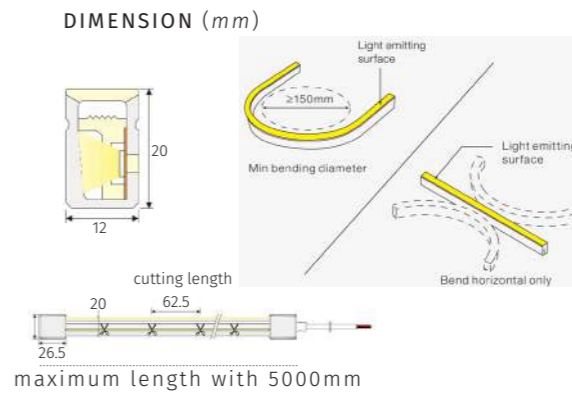

POWER SUPPLY
24Vdc


LUMEN EFFICACY
>50lm/W (at 3000K)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	Control gear	Accessory
<input type="checkbox"/> 10W/m	<input type="checkbox"/> RGB	<input type="checkbox"/> 120°	<input type="checkbox"/> DMX	<input type="checkbox"/> MC-1220 (SURFACE MOUNT) MOUNTING CLIP
<input type="checkbox"/> 15W/m			<input type="checkbox"/> WIFI + RF	<input type="checkbox"/> AP-1220 (SURFACE MOUNT) ALU-PROFILE

NES1220 | LED Neon - Side bend | powerLED 10W/m ~ 15W/m **RGBW** [4 in 1]

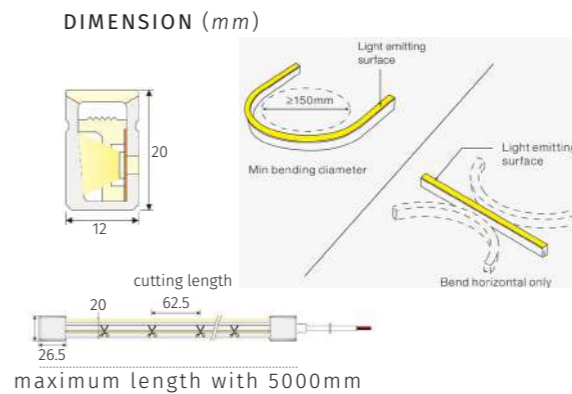

POWER SUPPLY
24Vdc

LUMEN EFFICACY
>50lm/W (at 3000K)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Power	CCT	Beam	Control gear	Accessory
<input type="checkbox"/> 10W/m	<input type="checkbox"/> RGBW (W=2700K)	<input type="checkbox"/> 120°	<input type="checkbox"/> DMX	<input type="checkbox"/> MC-1220 (SURFACE MOUNT) MOUNTING CLIP
<input type="checkbox"/> 15W/m	<input type="checkbox"/> RGBW (W=3000K) <input type="checkbox"/> RGBW (W=4000K)		<input type="checkbox"/> WIFI + RF	<input type="checkbox"/> AP-1220 (SURFACE MOUNT) ALU-PROFILE



LA LIGHTING provides great choices for designers and architectures to simply change the light direction from the wall to the ceiling and back, blurring the borders and creating new magnificent spaces and incredibly unique atmosphere.

Wide choice of luminaires, with their sharp minimalist design, enables to provide elegance and style for any project, as long as magnetic installation makes it easy to change the light of the room.

magnetic system



MAGNETIC SYSTEM

S20 | magnetic profiles | 48Vdc

IP20 CE RoHS

Surface mounted profiles



White	S20	L = 1000 mm	1.0M
Black	S20	L = 1500 mm	1.5M

_max. load 600W


ACCESSORIES



R20 | magnetic profiles | 48Vdc

IP20 CE RoHS

Recessed profiles

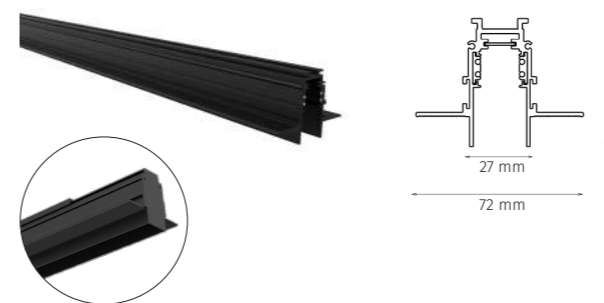

White	R20	L = 1000 mm	1.0M
Black	R20	L = 1500 mm	1.5M

_max. load 600W

ACCESSORIES



S3 | magnetic profiles | 48Vdc

IP20 CE RoHS

Surface mounted profiles



White	S3	L = 1000 mm	1.0M
Black	S3	L = 1500 mm	1.5M

_max. load 600W


ACCESSORIES



M20L | Magnetic track light | powerLED 6W ~ 18W



DIMENSION (mm)

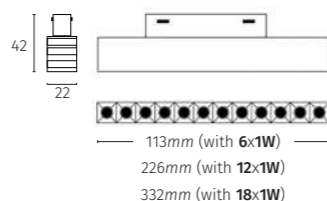

POWER SUPPLY

48Vdc

LUMEN EFFICACY

>70lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
	<input type="checkbox"/> 18W	<input type="checkbox"/> 6000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K~6500K (Tunable White)		

LBM5 | Magnetic track light | powerLED 10W ~ 20W



DIMENSION (mm)

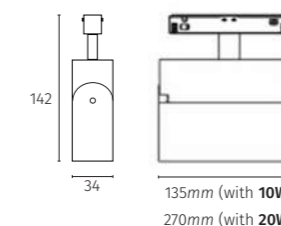

POWER SUPPLY

48Vdc

LUMEN EFFICACY

>70lm/W (at 3000K)

CRI (Ra)

> 92


LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 30°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 45°	<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K~6500K (Tunable White)		

M20D | Magnetic track light | powerLED 10W ~ 20W



DIMENSION (mm)

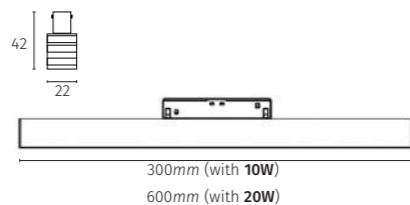

POWER SUPPLY

48Vdc

LUMEN EFFICACY

>70lm/W (at 3000K)

CRI (Ra)

> 92


LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K~6500K (Tunable White)		

LBM2 | Magnetic track light | powerLED 6W ~ 12W



DIMENSION (mm)

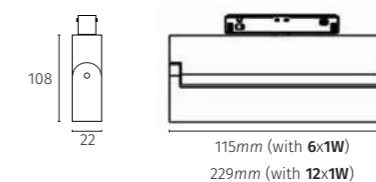

POWER SUPPLY

48Vdc

LUMEN EFFICACY

>70lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)


> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 6000K		<input type="checkbox"/> DALI dimming
		<input type="checkbox"/> 2700K~6500K (Tunable White)		



TR6 | Magnetic track light | powerLED 7W ~ 12W



DIMENSION (mm)

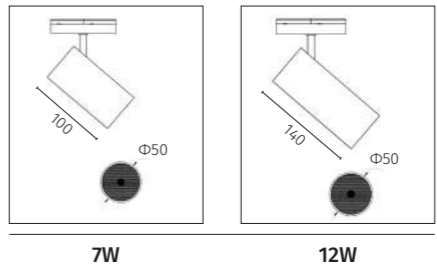

POWER SUPPLY
48Vdc

LUMEN EFFICACY
>70lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 12°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DALI dimming

TM1 | Magnetic track light | powerLED 5W



DIMENSION (mm)



POWER SUPPLY
48Vdc

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 12°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 6000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DALI dimming



LA LIGHTING offers a variety of discreet spotlights for task and accent lighting applications. Our products are available in a variety of beam spreads - all with minimal glare. These can be used for highlighting architectural features, objects, signage and other details where a small, minimalistic product is required with a high output.


track light



TM | Track light | powerLED 8W ~ 12W



DIMENSION (mm)

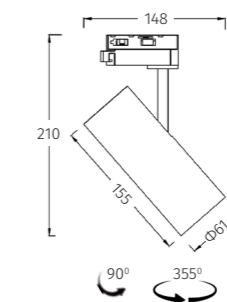

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 8W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 12W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 36°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60°	<input type="checkbox"/> DALI dimming

TM40 | Track light | powerLED 15W ~ 20W



DIMENSION (mm)

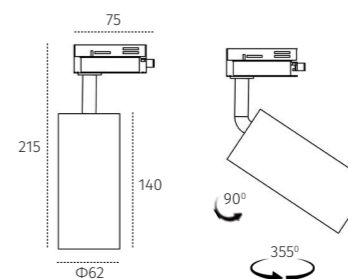

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 97


LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 15W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10°	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 18W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°	<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 20W	<input type="checkbox"/> 4000K	<input type="checkbox"/> 24°	<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 36°	<input type="checkbox"/> DALI dimming
			<input type="checkbox"/> 50°	



TRN42 | Track light | powerLED 5W



DIMENSION (mm)

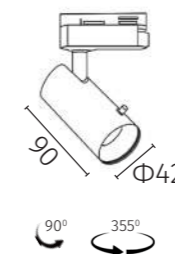

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)


CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° <i>zoomable</i>	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming

TRN50 | Track light | powerLED 10W



DIMENSION (mm)

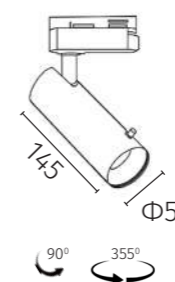

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 92

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 10° ~ 40° <i>zoomable</i>	<input type="checkbox"/> On-off
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
		<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



TZ45 | Track light | powerLED 5W ~ 8W



DIMENSION (mm)

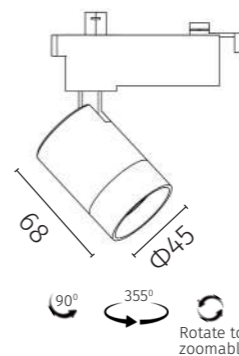

POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>60lm/W (at 3000K)

CRI (Ra)

> 95

LIFETIME (Ta 25°C)

> 50,000h


Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° ~ 40° <i>zoomable</i>	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 8W	<input type="checkbox"/> 4000K		
		<input type="checkbox"/> 5000K		

S022 | Track light | powerLED 6W ~ 10W



DIMENSION (mm)

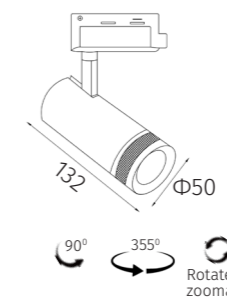

POWER SUPPLY

220Vac, 50Hz

LUMEN EFFICACY

>60lm/W (at 3000K)

CRI (Ra)

> 92

LIFETIME (Ta 25°C)


> 50,000h

Key Information


Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15° ~ 60° <i>zoomable</i>	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 10W	<input type="checkbox"/> 4000K		<input type="checkbox"/> 0-10V dimming
		<input type="checkbox"/> 5000K		<input type="checkbox"/> DALI dimming



SO24 | Track light | powerLED 12W ~ 18W



DIMENSION (mm)

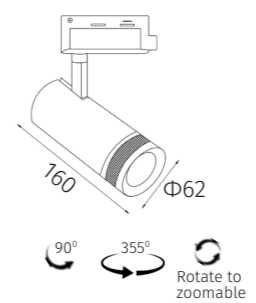

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
☀ > 92


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam	LED-Driver
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 15° ~ 60° zoomable	<input type="checkbox"/> On-off
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K		<input type="checkbox"/> Triac dimming
	<input type="checkbox"/> 18W	<input type="checkbox"/> 4000K <input type="checkbox"/> 5000K		<input type="checkbox"/> 0-10V dimming <input type="checkbox"/> DALI dimming

track system configuration


T2CS | Track rails | Two wired - Surface Mounted

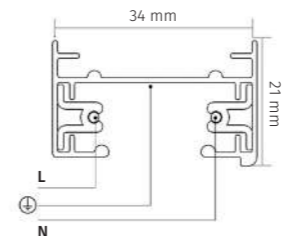

_oder code

<input type="checkbox"/> White	T2CS	L = 1000 mm	1.0M
<input checked="" type="checkbox"/> Black	T2CS	L = 1500 mm	1.5M

T2CR | Track rails | Two wired - Recessed

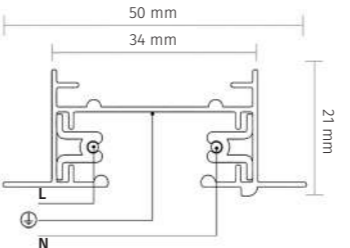

_oder code

<input type="checkbox"/> White	T2CR	L = 1000 mm	1.0M
<input checked="" type="checkbox"/> Black	T2CR	L = 1500 mm	1.5M

Accessories

 Central joint	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> 2CP <input checked="" type="checkbox"/> 2CP	 L - Shape joint	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> 2CL <input checked="" type="checkbox"/> 2CL	 T - Shape joint	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black	<input type="checkbox"/> 2CT <input checked="" type="checkbox"/> 2CT

[OUTDOOR]



Floor recessed fixture with stainless steel frame. Adjustable angle beam, aluminium diecasting body with high resistance painting, and anti corrosion treatment. Drive over extraclear glass diffuser.

Material specifications

_housing Aluminium, finishing with spray-painting or powder painting

_font cover Stainless steel SUS 316#

_glass: Tempered glass. T = 6mm

_cable gland IP-68 PG-9 PVC

_gasket Silicon seal

_CRI82+


RGBX Colorful series can be connected to the lighting control system.

inground light

10303 | Inground light | powerLED 1W



DIMENSION (mm)



IP67 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
95lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°

_driver: constant current output, non-dimmable


_finish: Stainless steel SUS 316*

_glass: Tempered glass T = 3mm

10315 | Inground light | powerLED 3W



DIMENSION (mm)



IP67 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
220lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°

_driver: constant current output, non-dimmable


_finish: Stainless steel SUS 316*

_glass: Tempered glass T = 3mm

10306 | Inground light | powerLED 3W



DIMENSION (mm)



IP67 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
195lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 45°

_driver: constant current output, non-dimmable


_finish: Stainless steel SUS 316*

_glass: Tempered glass T = 3mm

10125 | Inground light | powerLED 3W



DIMENSION (mm)



IP67 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
145lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 30°
			<input type="checkbox"/> 120°

_driver: constant current output, non-dimmable

_finish: Stainless steel SUS 316*


_glass: Tempered glass T = 3mm

11303 | Inground light | powerLED 2W



IP67 CE RoHS

DIMENSION (mm)

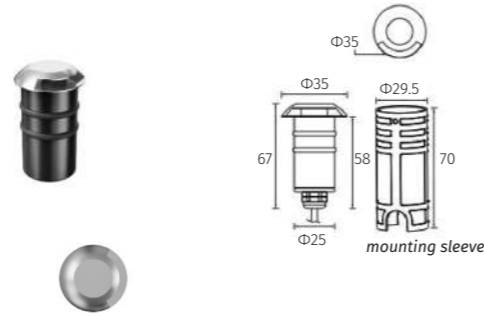

POWER SUPPLY
24Vdc

LUMINOUS FLUX
70lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 2W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 1 way

_driver: constant current output, non-dimmable

_finish: Stainless steel SUS 316*

_glass: Tempered glass T = 3mm

10113 | Inground light | powerLED 5W



IP67 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
435lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 13° <input type="checkbox"/> 23°

_driver: constant current output, non-dimmable

_finish: Stainless steel SUS 316*


_glass: Tempered glass T = 8mm

10185 | Inground light | powerLED 8W



IP67 CE RoHS

DIMENSION (mm)

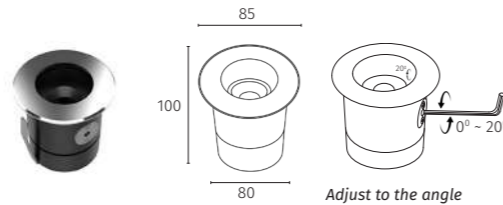

POWER SUPPLY
24Vdc

LUMINOUS FLUX
650lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 8W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°

_driver: constant current output, non-dimmable

_finish: Stainless steel SUS 304*, black body

_glass: Tempered glass T = 3mm

10117 | Inground light | powerLED 10W



IP67 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
915lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 13° <input type="checkbox"/> 23°

_driver: constant current output, non-dimmable

_finish: Stainless steel SUS 316*

_glass: Tempered glass T = 8mm



Outdoor bollards are essential for illuminating pathways and driveways. By providing illumination at night, the bollard will act as a marker between areas and add a modern effect to an exterior space.

Material specifications

- _housing** Aluminium powder painting
- _glass:** Tempered glass. T = 3mm
- _cable gland** IP-67 male female
- _gasket** Silicon seal
- _CRI82+**


bollard light



20109 | Bollard light | powerLED 9W



DIMENSION (mm)

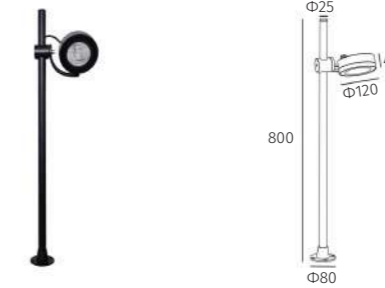

IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
800lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Grey	<input type="checkbox"/> 9W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
<input type="checkbox"/> Black			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Polymethyl methacrylate (PMMA)

20808 | Bollard light | powerLED 2x5W



DIMENSION (mm)

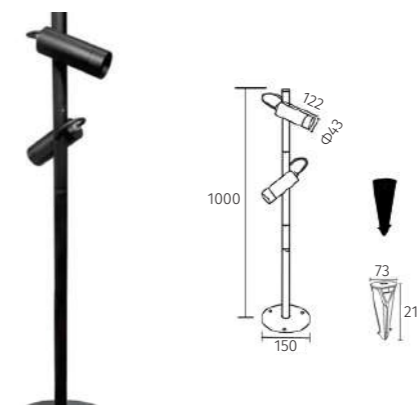

IP67 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
400lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24° 36°

_driver: constant current output, non-dimmable

_housing: Constructed with 6063 aluminum

_diffuser: Tempered Glass



20810 | Bollard light | powerLED 10W



IP65 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
1036lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 140°

_driver: constant current output, non-dimmable

_housing: Corrosion-resistant ADC#12 aluminum

_diffuser: Transparent (PC)

20812 | Bollard light | powerLED 7W

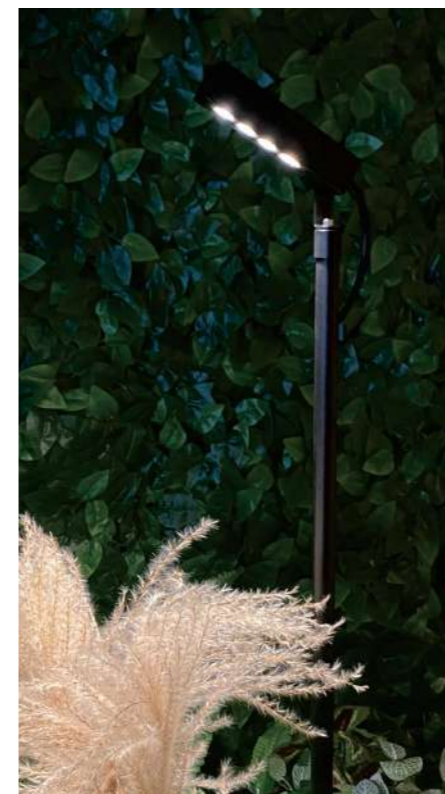

IP65 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
442lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 7W (h=800mm)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 36°

_driver: constant current output, non-dimmable

_housing: Constructed with 6063 aluminum

_diffuser: Tempered Glass




20300 | Bollard light | powerLED 6.5W

IP65 CE RoHS



DIMENSION (mm)

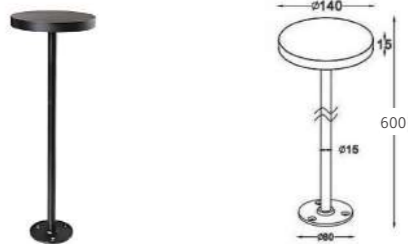

POWER SUPPLY
24Vdc

LUMINOUS FLUX
380lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 6.5W (h=600mm)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Brown			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Polymethyl methacrylate (PMMA)

20805 | Bollard light | powerLED 4W

IP65 CE RoHS



DIMENSION (mm)



POWER SUPPLY
12Vdc (G4 Base)

LUMINOUS FLUX
350lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Bronze	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_diffuser: Polycarbonate (PC)



Lighting effects for illuminating architecture and green areas. Broad range of lighting effects: from highly concentrated beams of light to lighting of architectural details, wall washer light beams for uniform lighting of façades and vertical surfaces. Numerous optical and photometric accessories. Extremely reliable and resistant to atmospheric agents and acts of vandalism.

Material specifications

Material specifications

_housing Aluminium powder painting

_glass: Tempered glass. T = 4mm

_cable gland IP-67 male female

_gasket Silicon seal

_CRI82+



RGBX Colorful series can be connected to the lighting control system.

spotlight



Elliptical(Asymmetric) Diffusers Angle(FWHM)



Lens/Reflector Angle

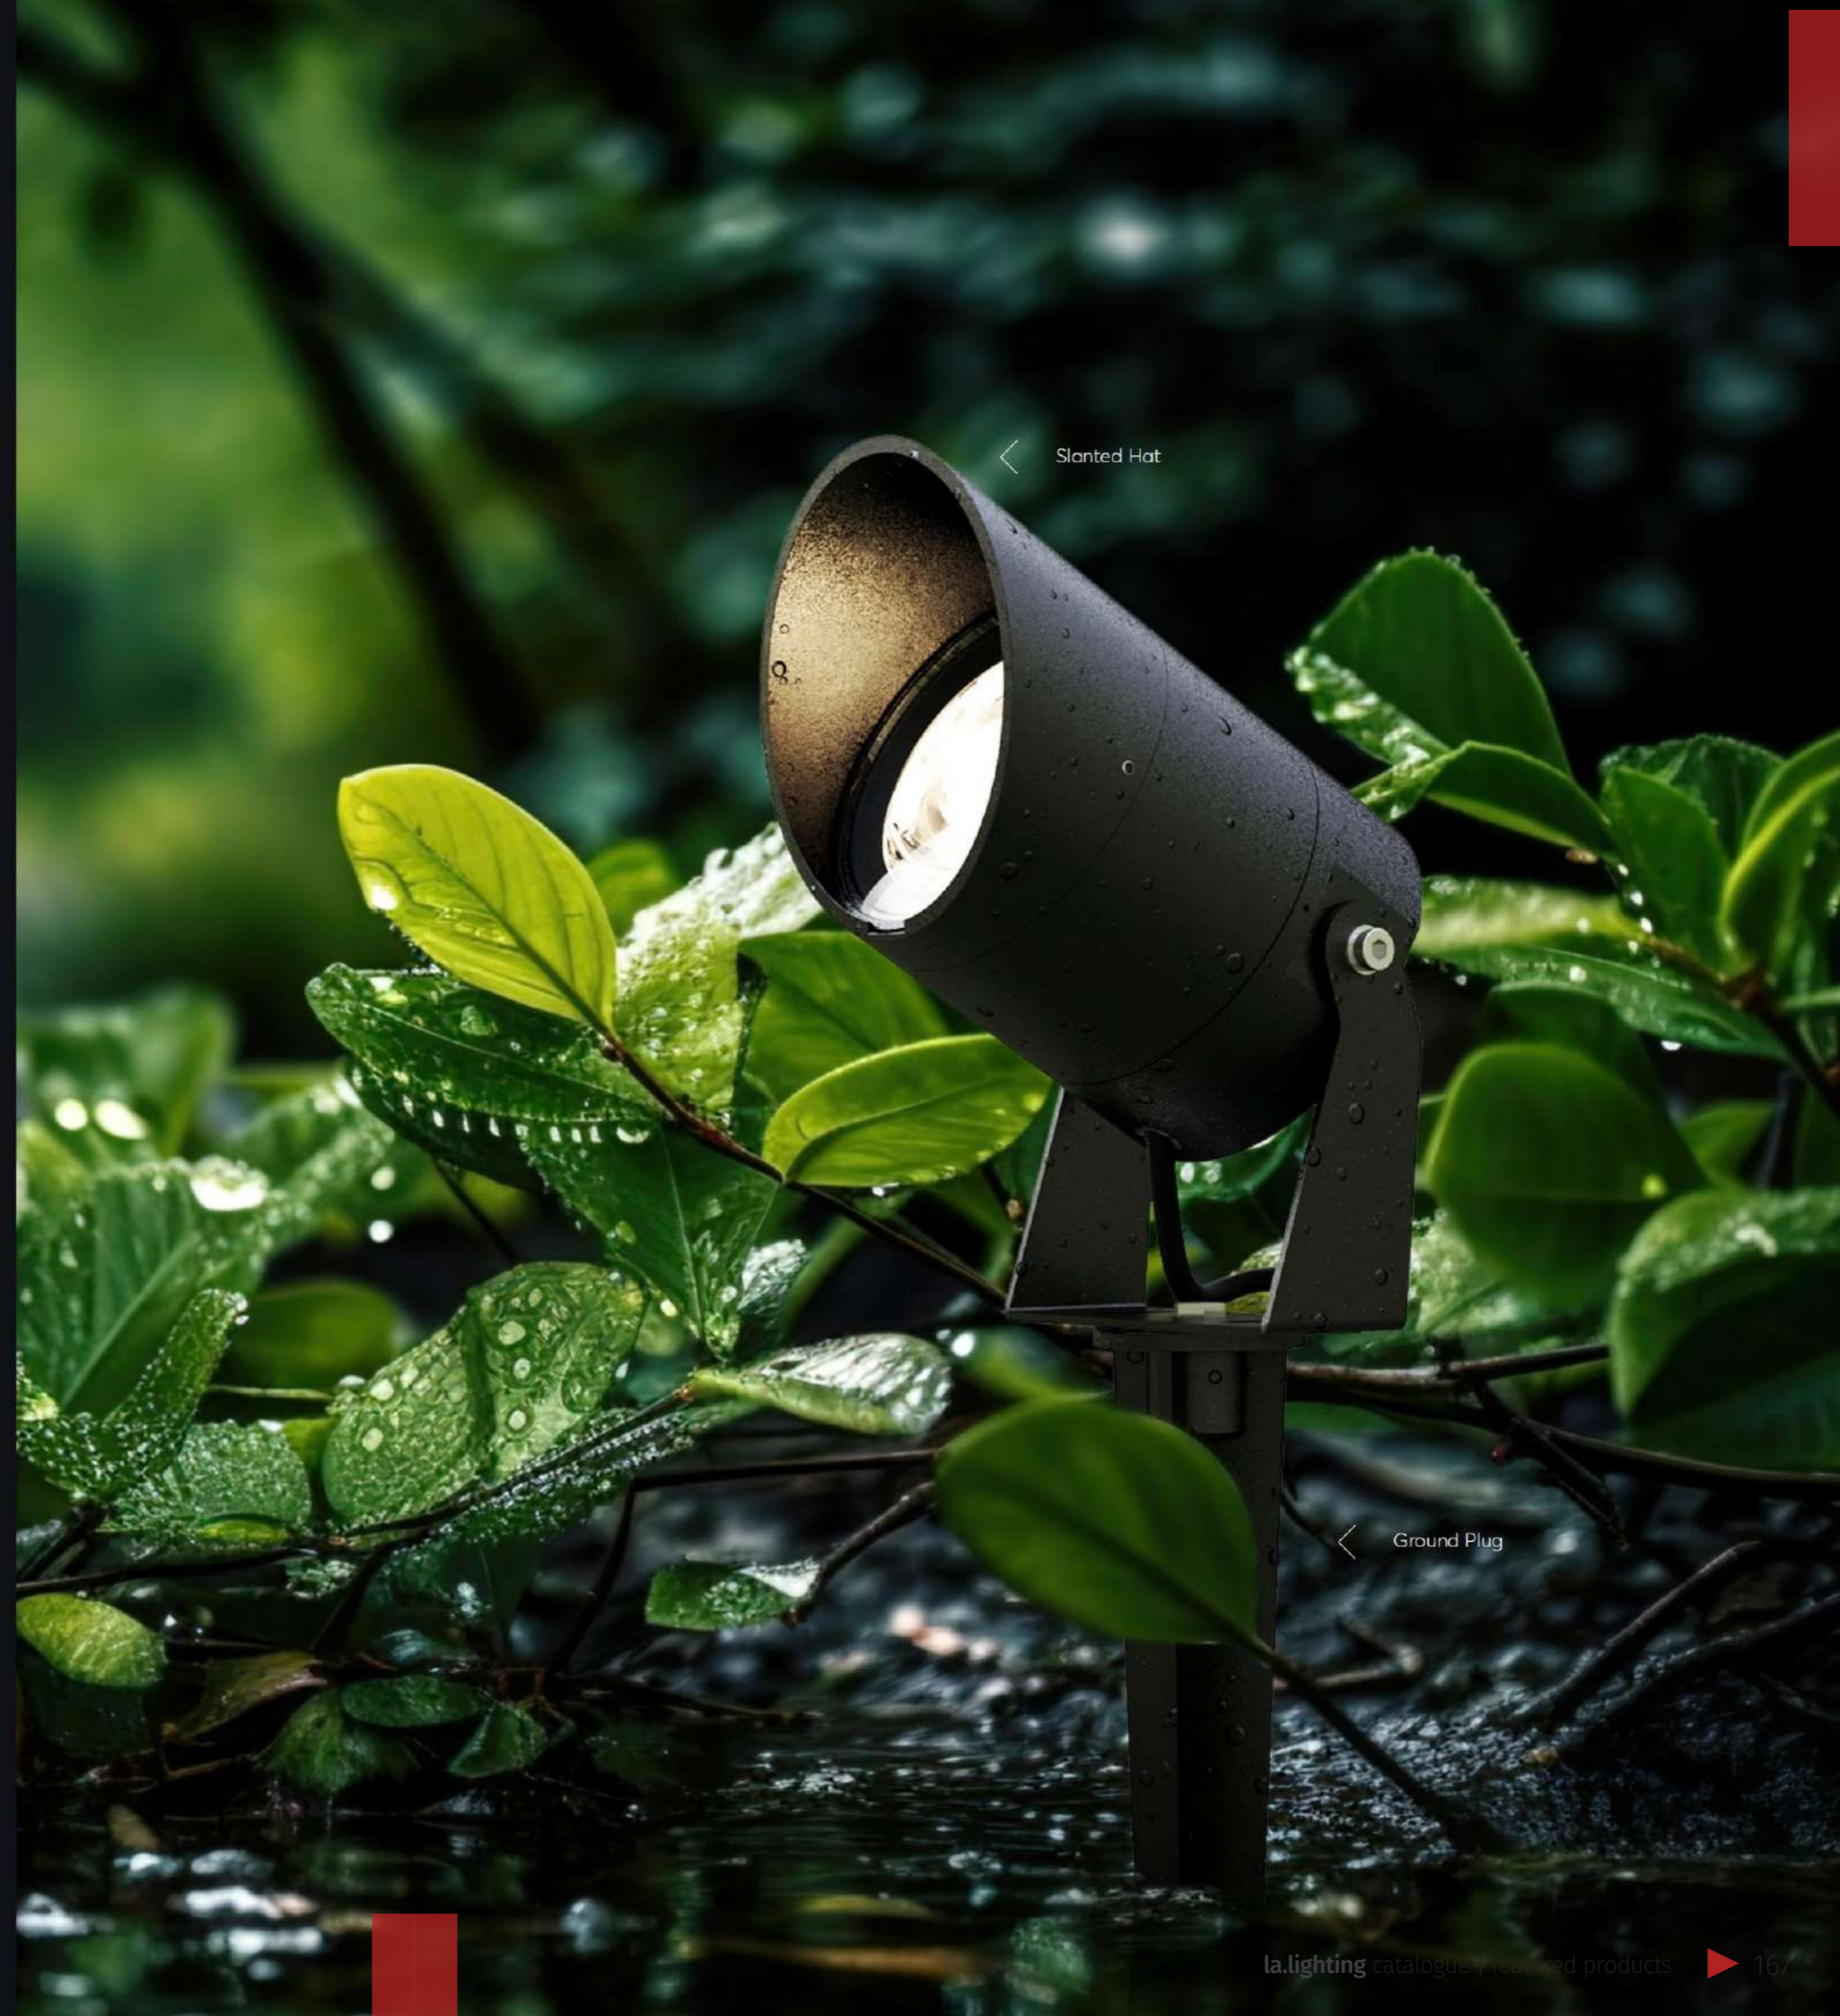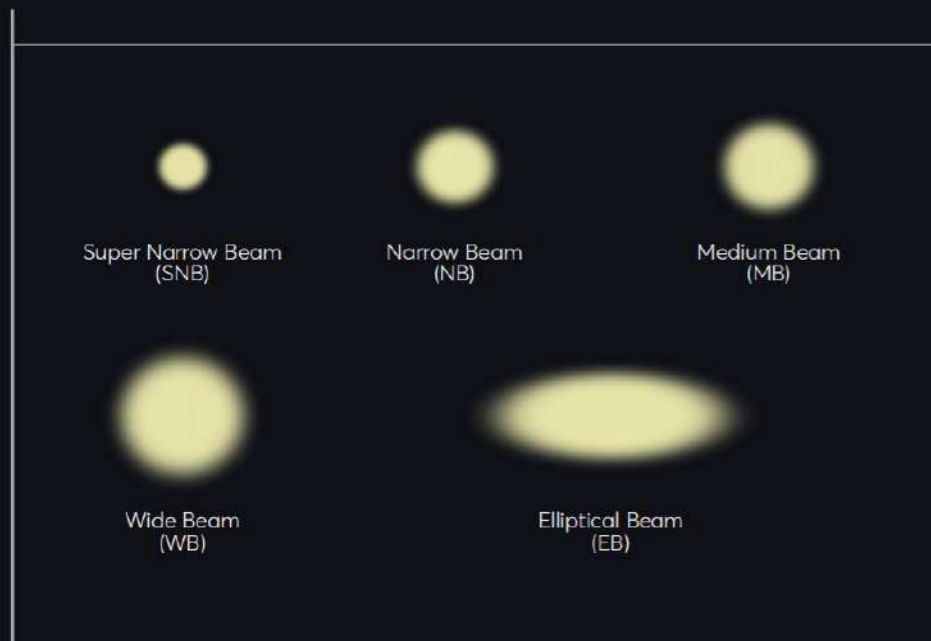

31147 | Spot light | powerLED 6W

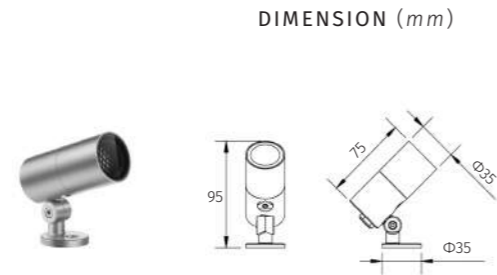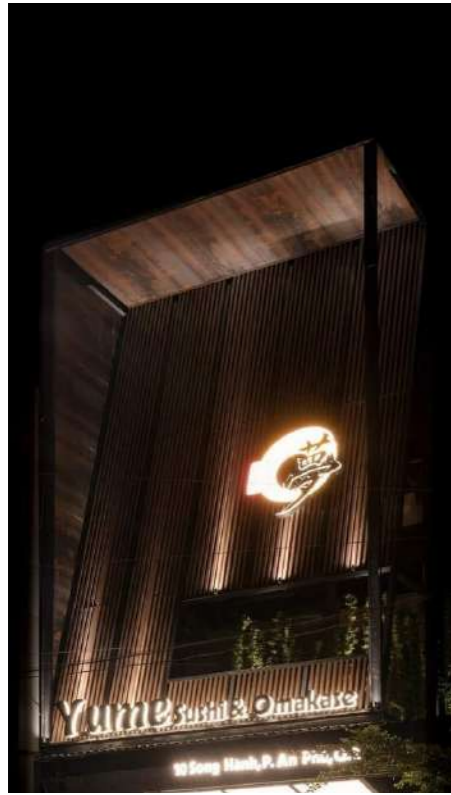

IP66 **CE** **RoHS**

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
360lm (at 3000K)

CRI (Ra)
 > 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8° <input type="checkbox"/> 12° <input type="checkbox"/> 30°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

31125 | Spot light | powerLED 16W

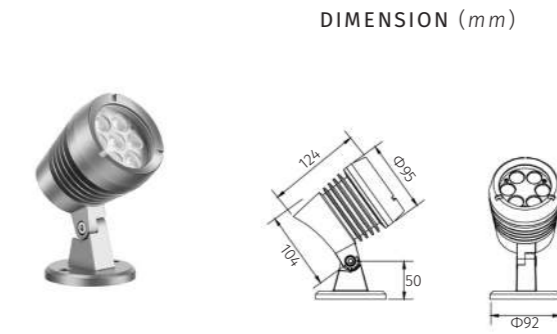

IP66 **CE** **RoHS**

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
670lm (at 3000K)

CRI (Ra)
 > 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 16W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 8°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

31146 | Spot light | powerLED 10W

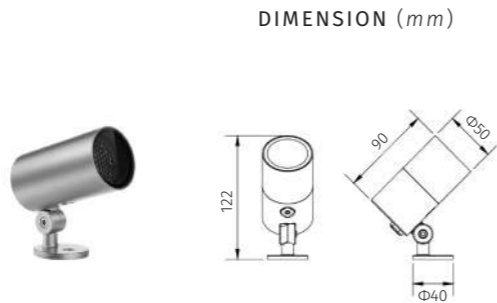

IP66 **CE** **RoHS**

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
600lm (at 3000K)

CRI (Ra)
 > 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 6° <input type="checkbox"/> 12° <input type="checkbox"/> 20° <input type="checkbox"/> 30°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

31140 | Spot light | powerLED 30W

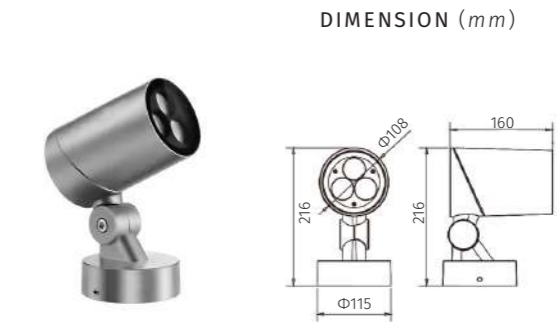

IP66 **CE** **RoHS**

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
1000lm (at 3000K)

CRI (Ra)
 > 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 30W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 6°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

30107 | Spot light | powerLED 3W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
24VdcLUMINOUS FLUX
130lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
<input type="checkbox"/> Black			<input type="checkbox"/> 30°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

30242 | Spot light | powerLED 5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
24VdcLUMINOUS FLUX
300lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 38°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

30108 | Spot light | powerLED 3W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50HzLUMINOUS FLUX
130lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
<input type="checkbox"/> Silver			<input type="checkbox"/> 30°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

30254 | Spot light | powerLED 5W



DIMENSION (mm)

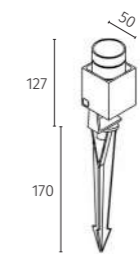

IP65 CE RoHS

POWER SUPPLY
24VdcLUMINOUS FLUX
490lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

30221 | Spot light | powerLED 5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50HzLUMEN EFFICACY
>60lm/W (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°

_driver: constant current output, non-dimmable**_housing:** Aluminium powder painting**_glass:** Tempered glass. T = 4mm

30225 | Spot light | powerLED 15W



DIMENSION (mm)



IP65 CE RoHS


POWER SUPPLY
220Vac, 50HzLUMEN EFFICACY
>60lm/W (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°
			<input type="checkbox"/> 60°

_driver: constant current output, non-dimmable**_housing:** Aluminium powder painting**_glass:** Tempered glass. T = 3mm

30223 | Spot light | powerLED 10W

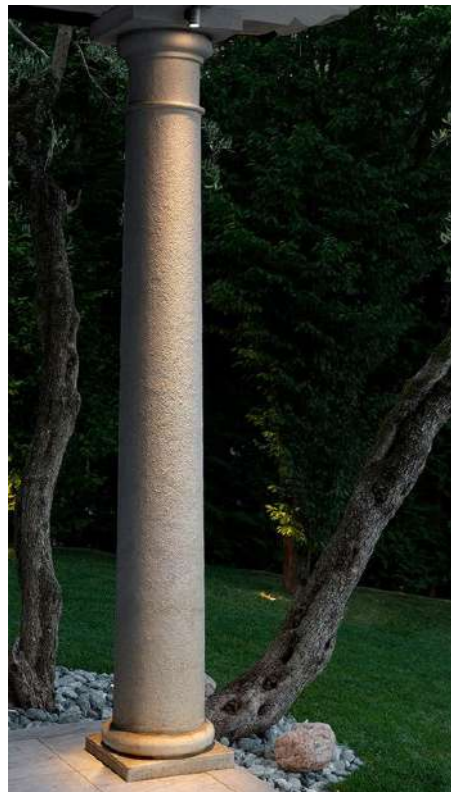

DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50HzLUMEN EFFICACY
>60lm/W (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°

_driver: constant current output, non-dimmable**_housing:** Aluminium powder painting**_glass:** Tempered glass. T = 4mm

30227 | Spot light | powerLED 20W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50HzLUMEN EFFICACY
>60lm/W (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 20W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°
			<input type="checkbox"/> 60°

_driver: constant current output, non-dimmable**_housing:** Aluminium powder painting**_glass:** Tempered glass. T = 4mm

30106 | Spot light | powerLED 4W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
340lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 4W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 4mm

30803 | Spot light | powerLED 10W



DIMENSION (mm)

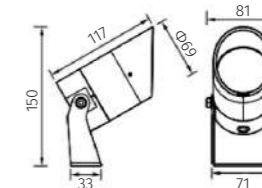

IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
900lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 4mm

30801 | Spot light | powerLED 6W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
454lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

30805 | Spot light | powerLED 15W



DIMENSION (mm)

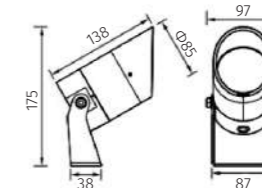

IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
1467lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 15W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15° <input type="checkbox"/> 24° <input type="checkbox"/> 36°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm




30807 | Spot light | powerLED 23W

IP65 CE RoHS



DIMENSION (mm)

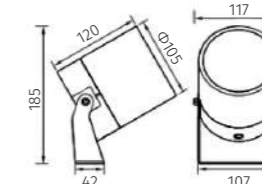

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
1749lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 23W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 15°
<input type="checkbox"/> White			<input type="checkbox"/> 24°
			<input type="checkbox"/> 36°


_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 4mm

30170 | Spot light | powerLED 2x12W

IP66 CE RoHS



DIMENSION (mm)



POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
1440lm

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 2x12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°
		<input type="checkbox"/> 4000K	

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 4mm



Upgrade your facade with soft lighting elements or create a playful lighting pattern on your wall. LA LIGHTING's wall mounted luminaires can do both. A remarkable feature in the wall surface range is the use of led in combination with a lens, fusing architectural light effects and energy efficiency.

Material specifications

_housing Aluminium powder painting

_glass: Tempered glass. T = 3mm

_cable gland IP-67 male female

_gasket Silicon seal

_CRI82+


RGBX Colorful series can be connected to the lighting control system.

wall light

50101 | Wall light | powerLED 5W ~ 10W



DIMENSION (mm)

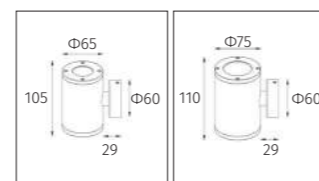

50101 (5W) 50102 (10W)

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 5W (1 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 13°
<input type="checkbox"/> Black	<input type="checkbox"/> 10W (1 side)		<input type="checkbox"/> 23°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

50109 | Wall light | powerLED 2x1W ~ 3W



DIMENSION (mm)

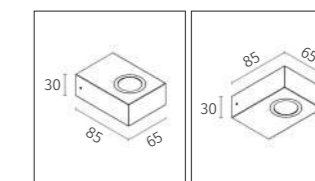

50109 (2x1W) 50110 (3W)

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x1W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90°
<input type="checkbox"/> Black	<input type="checkbox"/> 3W (1 side)		

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

50171 | Wall light | powerLED 2x5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
935lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x5W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 23°
<input type="checkbox"/> Black			<input type="checkbox"/> 38°

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

50192 | Wall light | powerLED 2x5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
435lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x5W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> Adjust
<input type="checkbox"/> Silver			
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_glass: Tempered glass. T = 3mm

50214 | Wall light | powerLED 2x3W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
280lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x3W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> Adjust
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

50232 | Wall light | powerLED 2x6.5W ~ 7W



DIMENSION (mm)

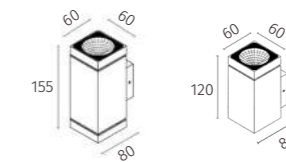

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>70lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x6.5W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°
<input type="checkbox"/> Black	<input type="checkbox"/> 7W (1 side)	<input type="checkbox"/> 4000K	

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_glass: Tempered glass. T = 3mm

50167 | Wall light | powerLED 10W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
400lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 10W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

53105 | Wall light | powerLED 2x5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
530lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x5W (2 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20x40°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

50270 | Wall light | powerLED 3x2.5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
265lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3x2.5W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

53210 | Wall light | powerLED 4x2W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
200lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 4x2W (4 side)	<input type="checkbox"/> 3000K	<input type="checkbox"/> 2° <input type="checkbox"/> 20°

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

50273 | Wall light | powerLED 12W



DIMENSION (mm)

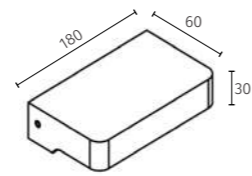

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
740lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

53170 | Wall light | powerLED 5W



DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
220Vac

LUMINOUS FLUX
660lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 3x170°

_driver: constant current output, non-dimmable

_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

50264 | Wall light | powerLED 3W

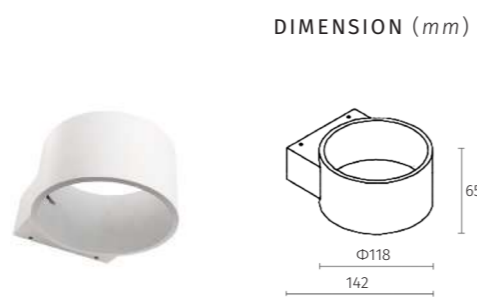


DIMENSION (mm)
 POWER SUPPLY
 220Vac, 50Hz
 LUMINOUS FLUX
 165lm (at 3000K)
 CRI (Ra)
 > 82
 LIFETIME (Ta 25°C)
 > 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

53190 | Wall light | powerLED 6W

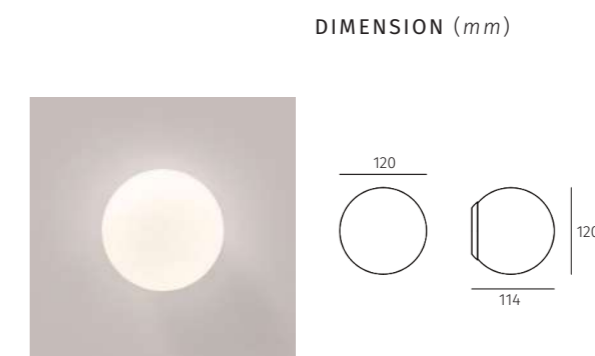


DIMENSION (mm)
 POWER SUPPLY
 220Vac, 50Hz
 LUMINOUS FLUX
 390lm (at 3000K)
 CRI (Ra)
 > 90
 LIFETIME (Ta 25°C)
 > 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Black	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 360°
		<input type="checkbox"/> 4000K	

_driver: on board (phase-cut dimming)
_housing: Aluminium powder painting
_glass: Opal glass. T = 2mm

50295 | Wall light | powerLED 3W




DIMENSION (mm)
 POWER SUPPLY
 220Vac, 50Hz
 LUMINOUS FLUX
 48lm (at 3000K)
 CRI (Ra)
 > 82
 LIFETIME (Ta 25°C)
 > 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 60°
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

53138 | Wall light | powerLED 2x7W

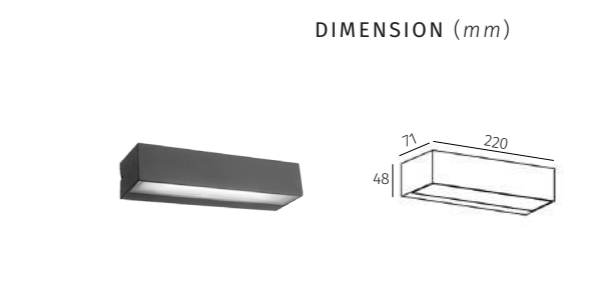

DIMENSION (mm)
 POWER SUPPLY
 220Vac, 50Hz
 LUMINOUS FLUX
 548lm (at 3000K)
 CRI (Ra)
 > 90
 LIFETIME (Ta 25°C)
 > 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2x7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 24°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)



This is a modular and decorative outdoor wall lights, which are crafted with a blend of elegance and durability. Designed to enhance the allure of your home's facade. Timeless design casts a soft, inviting glow, transforming your evenings into a canvas of comfort and charm.

IP65

Ceiling/Wall Light



Features

- _versatile:** The features a transparent/opal glass shade with a wave/ reseau cut, ceating aesthetic accents suitable for bathrooms and corridors, both indoors and outdoors.
- _moisture resistance:** With an IP65 rating, this LED light ensures durability against moisture, making it ideal for wet enviroments.
- _high-quality Illumination:** Boasting a CRI >90, the light delivers true-to-life colors, enhancing the ambiance of your space.
- _color temperature control:** Easily switch between 2700K, 3000K and 4000K with the CCT switch for the perfect mood lighting.

GLASS-CLEAR



WAVE



RESEAU






58386 | Wall light | powerLED 6W



Accessory
with finish color

- Wht** White
- Blk** Black
- Brz** Bronze

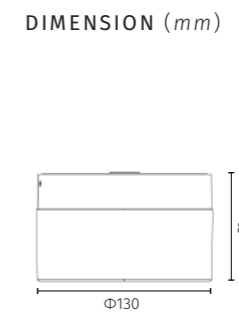

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
>400lm

CRI (Ra)
 >90

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Glass shape -color	Accessory	Power	CCT	Beam
<input type="checkbox"/> Wave - Clear	<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Bronze	<input type="checkbox"/> 6W	2700K 3000K 4000K CCT Switch for the lighting	<input type="checkbox"/> 120°




_driver: on board (phase-cut dimming)
_housing: Aluminium powder painting

58388 | Wall light | powerLED 6W



Accessory
with finish color

- Wht** White
- Blk** Black
- Brz** Bronze

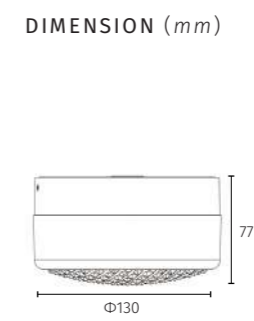

POWER SUPPLY
220Vac, 50Hz


LUMINOUS FLUX
>400lm

CRI (Ra)
 >90

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Glass shape -color	Accessory	Power	CCT	Beam
<input type="checkbox"/> Reseau - Clear	<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Bronze	<input type="checkbox"/> 6W	2700K 3000K 4000K CCT Switch for the lighting	<input type="checkbox"/> 120°

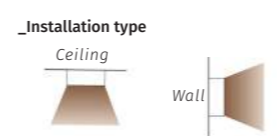


_driver: on board (phase-cut dimming)
_housing: Aluminium powder painting

53185 | Step light | powerLED 2W

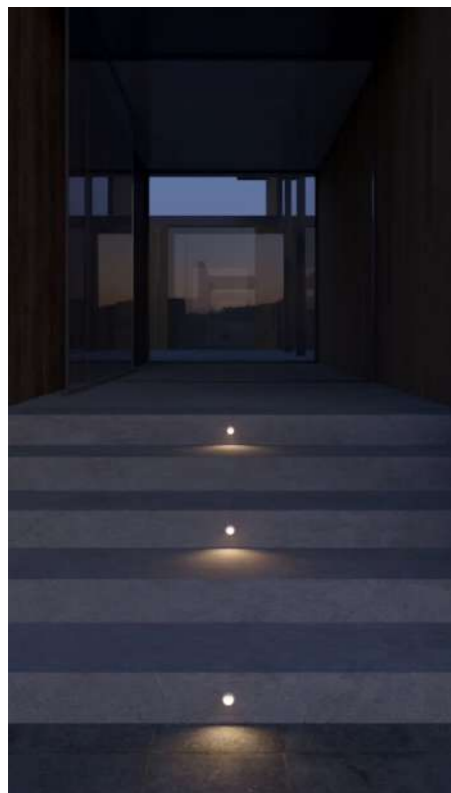

DIMENSION (mm)



IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
45lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

50210 | Step light | powerLED 3W



DIMENSION (mm)

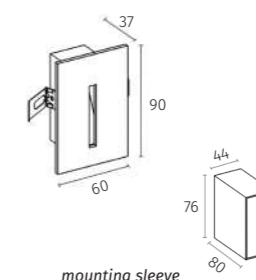

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
17lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°
<input type="checkbox"/> Silver			
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

53365 | Step light | powerLED 3W



DIMENSION (mm)
Cut out Φ 40

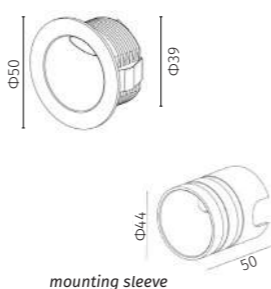

IP65 CE RoHS

POWER SUPPLY
24Vdc

LUMINOUS FLUX
150lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> Wide
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable


_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

52301 | Step light | powerLED 2W



DIMENSION (mm)

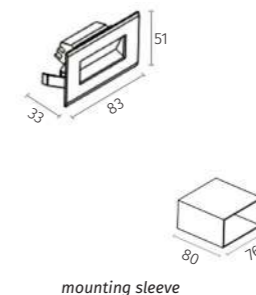

ONLY INDOOR IP54 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
130lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 2W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Silver			
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable

_housing: Aluminium powder painting

_lens: Polymethyl methacrylate (PMMA)

52303 | Step light | powerLED 3W

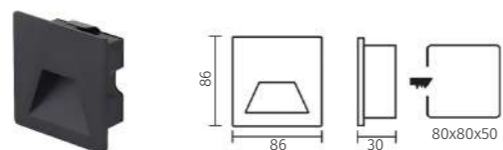

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
270lm (at 3000K)

CRI (Ra)
> 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

52307 | Step light | powerLED 3W

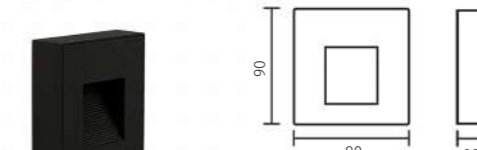

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
270lm (at 3000K)

CRI (Ra)
> 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

52305 | Step light | powerLED 6W

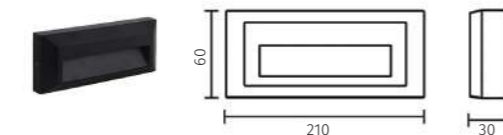

IP65 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
540lm (at 3000K)

CRI (Ra)
> 82


LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 6W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 120°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

52309 | Step light | powerLED 3W

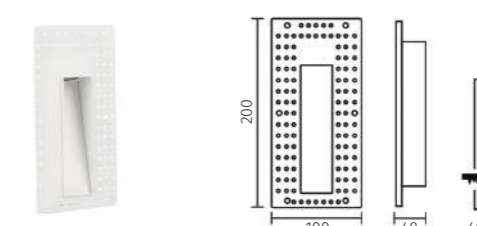

IP20 CE RoHS

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
270lm (at 3000K)

CRI (Ra)
> 90

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°
<input type="checkbox"/> Black			


_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)



52311 | Step light | powerLED 3W

IP20 CE RoHS

DIMENSION (mm)

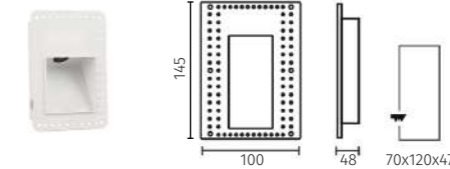POWER SUPPLY
220Vac, 50HzLUMINOUS FLUX
270lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information


Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90°
<input type="checkbox"/> Black			

_driver: constant current output, non-dimmable*_housing:* Aluminium powder painting*_lens:* Polymethyl methacrylate (PMMA)

10301 | Step light | powerLED 1W

IP67 CE RoHS

DIMENSION (mm)

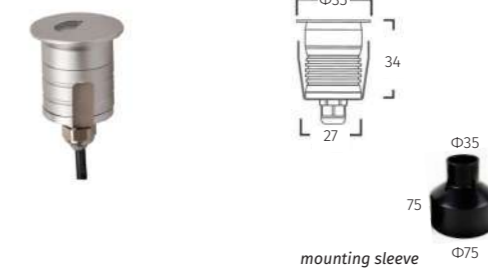POWER SUPPLY
24VdcLUMINOUS FLUX
95lm (at 3000K)CRI (Ra)
> 82LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 1 way

_driver: constant current output, non-dimmable*_finish:* Stainless steel SUS 316**_glass:* Tempered glass. T = 3mm)

53010 | Reading light | powerLED 3W



IP20 **CE** **RoHS**

DIMENSION (mm)
Cut out 46x142x52 mm

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
280lm (at 3000K)

CRI (Ra)
 > 82

LIFETIME (Ta 25°C)
> 50,000h

On/Off

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 30°
<input type="checkbox"/> Black		<input type="checkbox"/> 3000K	

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting

53026 | Reading light | powerLED 2W



IP20 **CE** **RoHS**

DIMENSION (mm)

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
120lm (at 3000K)

CRI (Ra)
 > 82

LIFETIME (Ta 25°C)
> 50,000h

On/Off

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)

53012 | Reading light | powerLED 5W



IP20 **CE** **RoHS**

DIMENSION (mm)
Cut out 52x90x30 mm

POWER SUPPLY
220Vac, 50Hz

LUMEN EFFICACY
>60lm (at 3000K)

CRI (Ra)
 > 95

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Brush Silver	<input type="checkbox"/> 5W	<input type="checkbox"/> 2700K	<input type="checkbox"/> 8° ~ 40°
<input type="checkbox"/> Brush Gold		<input type="checkbox"/> 3000K	
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	

_driver: constant current output, triac dimming
_housing: Aluminium powder painting

53037 | Reading light | powerLED 3W



IP20 **CE** **RoHS**

DIMENSION (mm)

POWER SUPPLY
220Vac, 50Hz

LUMINOUS FLUX
280lm (at 3000K)

CRI (Ra)
 > 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> White	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°
<input type="checkbox"/> Black		<input type="checkbox"/> 4000K	

_driver: constant current output, non-dimmable
_housing: Aluminium powder painting
_lens: Polymethyl methacrylate (PMMA)



Reliability is the first design input around which we develop solutions for applications in immersed contexts, swimming pools or aquatic installations, for hotels and residential sites. Recessed versions are available with various types of optic and colour temperature. Versions are also available for RGB and adjustment systems to create lighting designs.

Material specifications

_housing Molding shaped stainless steel SUS 316#

_font cover Stainless steel SUS 316#

_glass: Tempered glass. T = 6mm

_cable gland Copper and nickel coated

_gasket Silicon seal

_CRI82+

RGBX Colorful series can be connected to the lighting control system.

underwater light




60116 | Under water light | powerLED 5x1W



IP68 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMEN EFFICACY
90lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 5x1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 23°


_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316*
_glass: Tempered glass T = 8mm

60102 | Under water light | powerLED 3x2W



IP68 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
320lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3x2W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 30°

_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316*
_glass: Tempered glass T = 8mm



60112 | Under water light | powerLED 1W

IP68 CE RoHS



DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
90lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 1W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 25°


_driver: constant current output, non-dimmable
 _finish: Stainless steel SUS 316*
 _glass: Tempered glass T = 8mm

60165 | Under water light | powerLED 3x4W RGBW

IP68 CE RoHS



DIMENSION (mm)

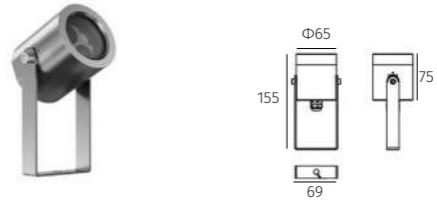

POWER SUPPLY
24Vdc

LUMINOUS FLUX
225lm (at 3000K)

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3x4W	<input type="checkbox"/> RGBW (4 in 1)	<input type="checkbox"/> 25°

_driver: constant current output, non-dimmable
 _finish: Stainless steel SUS 316*
 _glass: Tempered glass T = 8mm




60882 | Under water light | powerLED 9x2W

IP68 CE RoHS



DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
990lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 9x2W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 10° <input type="checkbox"/> 24°


_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316*
_glass: Tempered glass T = 8mm

60884 | Under water light | powerLED 12x3.5W RGBW

IP68 CE RoHS



DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
990lm (at 3000K)

LIFETIME (Ta 25°C)
> 50,000h


Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 12x3.5W	<input type="checkbox"/> RGBW (4 in 1)	<input type="checkbox"/> 10° <input type="checkbox"/> 20°

_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316*
_glass: Tempered glass T = 8mm




60130 | Under water light | powerLED 3W

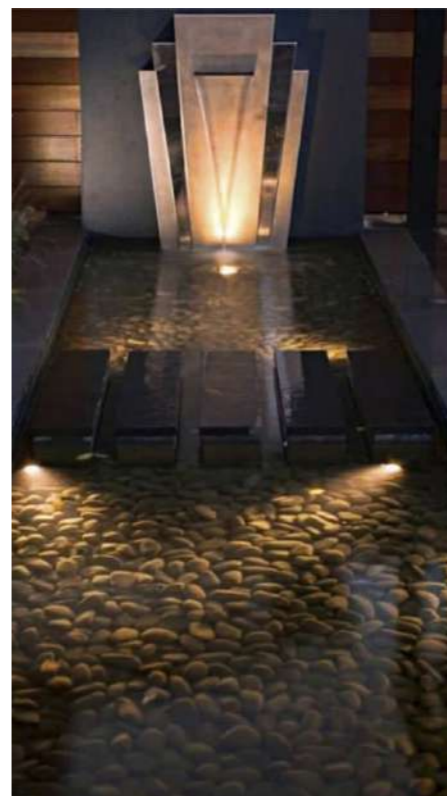

IP68 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
90lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 3W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 3° <input type="checkbox"/> 40°


_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316°
_glass: Tempered glass T = 6mm

60138 | Under water light | powerLED 7W



IP68 CE RoHS

DIMENSION (mm)



POWER SUPPLY
24Vdc

LUMINOUS FLUX
490lm (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 7W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 13° <input type="checkbox"/> 23°

_driver: constant current output, non-dimmable
_finish: Stainless steel SUS 316°
_glass: Tempered glass T = 8mm



Oblique lighting highlights and emphasises the threedimensional nature of the wall where it is used. Light interacts and plays with the material to create attractive, scenic images and a new setting that quite simply does not exist during the day. Optics are particularly well controlled to ensure uniform lighting. Static or dynamic light at colour temperature or in RGB colour variants.

Material specifications

_housing Aluminium powder painting

_glass: Tempered glass. T = 3mm

_cable gland IP-67 male female


_gasket Silicon seal

_CRI82+

RGBX Colorful series can be connected to the lighting control system.

wall washer light

70108 | Wall washer light | powerLED 24W

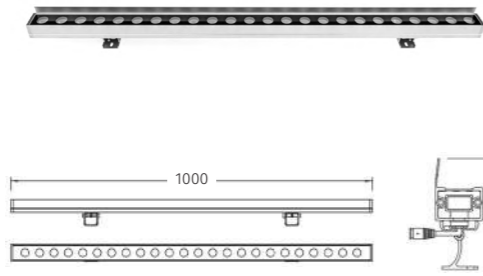


_unit (mm)

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Grey	<input type="checkbox"/> 24W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°x40°

_housing: Aluminium powder painting
_glass: Tempered glass T = 3mm




POWER SUPPLY
24Vdc

LUMEN EFFICACY
>100lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

71302 | Wall washer light | powerLED 26W ~ 40W

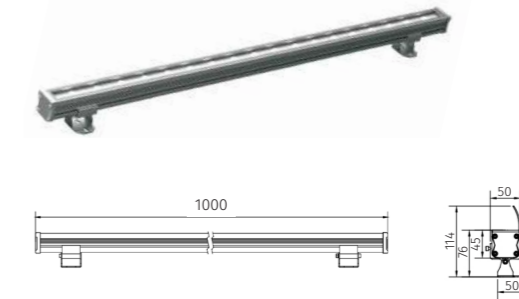


_unit (mm)

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Grey	<input type="checkbox"/> 26W (RGB only) <input type="checkbox"/> 40W	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> RGB (3 in 1)	<input type="checkbox"/> 10°x60°

_housing: Aluminium powder painting
_glass: Tempered glass T = 3mm





POWER SUPPLY
24Vdc

LUMEN EFFICACY
>100lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

70109 | Wall washer light | powerLED 12W

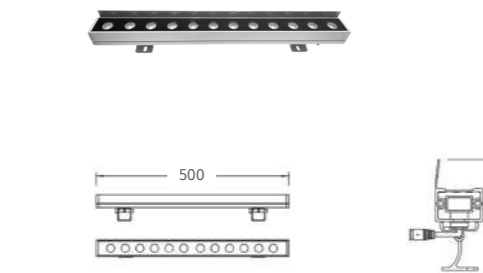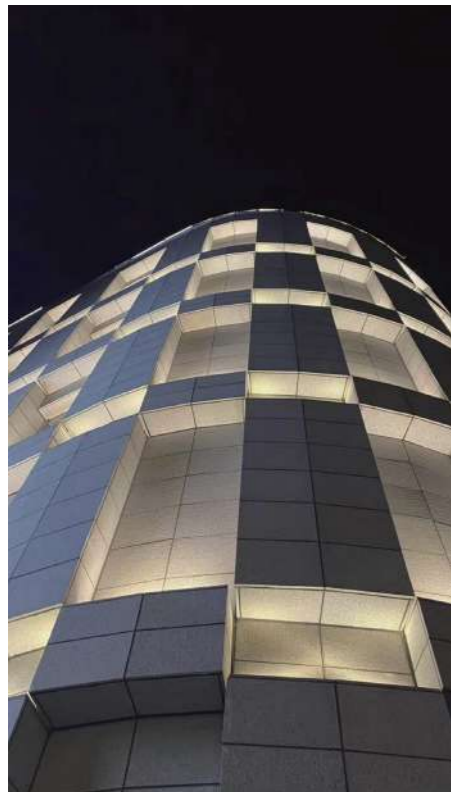


_unit (mm)

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Grey	<input type="checkbox"/> 12W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 20°x40°

_housing: Aluminium powder painting
_glass: Tempered glass T = 3mm





POWER SUPPLY
24Vdc

LUMEN EFFICACY
>100lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h

71307 | Wall washer light | powerLED 30W ~ 48W

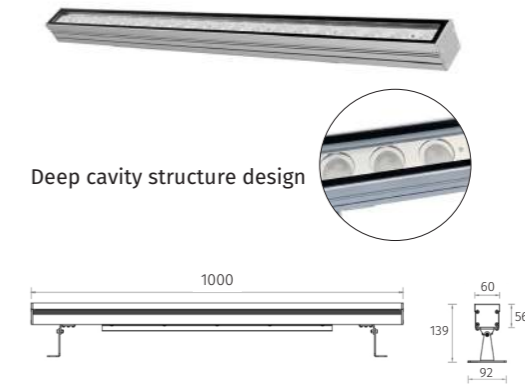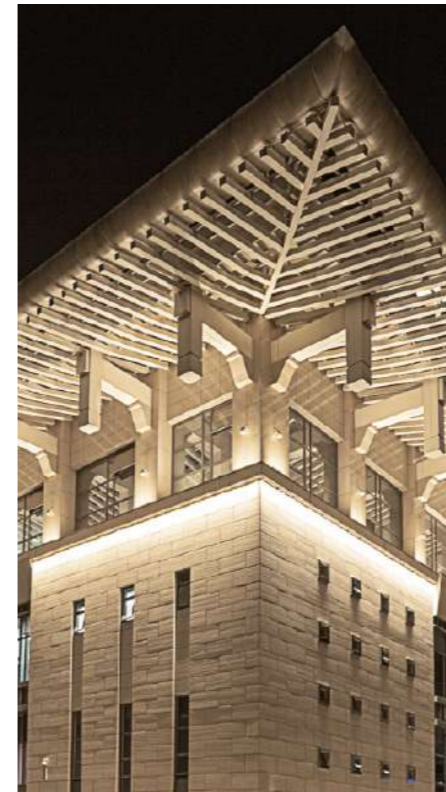


_unit (mm)

Key Information

Finish color	Power	CCT	Beam
<input type="checkbox"/> Silver	<input type="checkbox"/> 30W <input type="checkbox"/> 48W	<input type="checkbox"/> 3000K	<input type="checkbox"/> 10°x70°

_housing: Aluminium powder painting
_glass: Tempered glass T = 3mm



POWER SUPPLY
24Vdc

LUMEN EFFICACY
>95lm/W (at 3000K)

CRI (Ra)
> 82

LIFETIME (Ta 25°C)
> 50,000h



2

YEARS WARRANTY

LA Lighting offers a 2-years warranty for indoor environment and 2-years for outdoor by manufacturing defects, subject to filling in the activation form available at www.design-lightart.com. In the absence of activation, the statutory warranty remains valid.

All power supply, wiring and accessories used for product installation shall be original LA Lighting parts or approved by the company. The warranty will become void if non original or non approved parts are used.

LIGHTART LIGHTING COMPANY LIMITED

No. 122, Street 28, Tan Hung Ward, Ho Chi Minh City

www.design-lightart.com