

Aquatiz Home Innovation Pvt Ltd

AquaSpace

PRODUCT CATALOGUE



Indian Factory:

Plot no-D-17,18,19 Gallops Industrial Park, Village- Rajoda,
Bavla, Ahmedabad-382220, Gujarat

www.aquatiz.in

www.aquaspacespace-innovation.com

Mobile:+91-7203025383

Email: india@aquatiz-home.com; admin@aquatiz-home.com

Singapore Headquarters:

100 Jalan Sultan #08-08 Sultan Plaza Singapore 199001

www.aquatiz-home.com

Email: info@aquatiz-home.com

Headquarters Factory



- RESEARCH
- MANUFACTURE
- DETECTION



Indian Ahmedabad Factory



Home Water Softener



SOFT WATER
BRINGS
HEALTHIER LIFE



Soft Skin



Hair Care




Health Shower



Triple Filtration Feature

TRIPLE FILTRATION FOR SOFT
& CLEAN WATER
NO ELECTRICITY REQUIREMENT

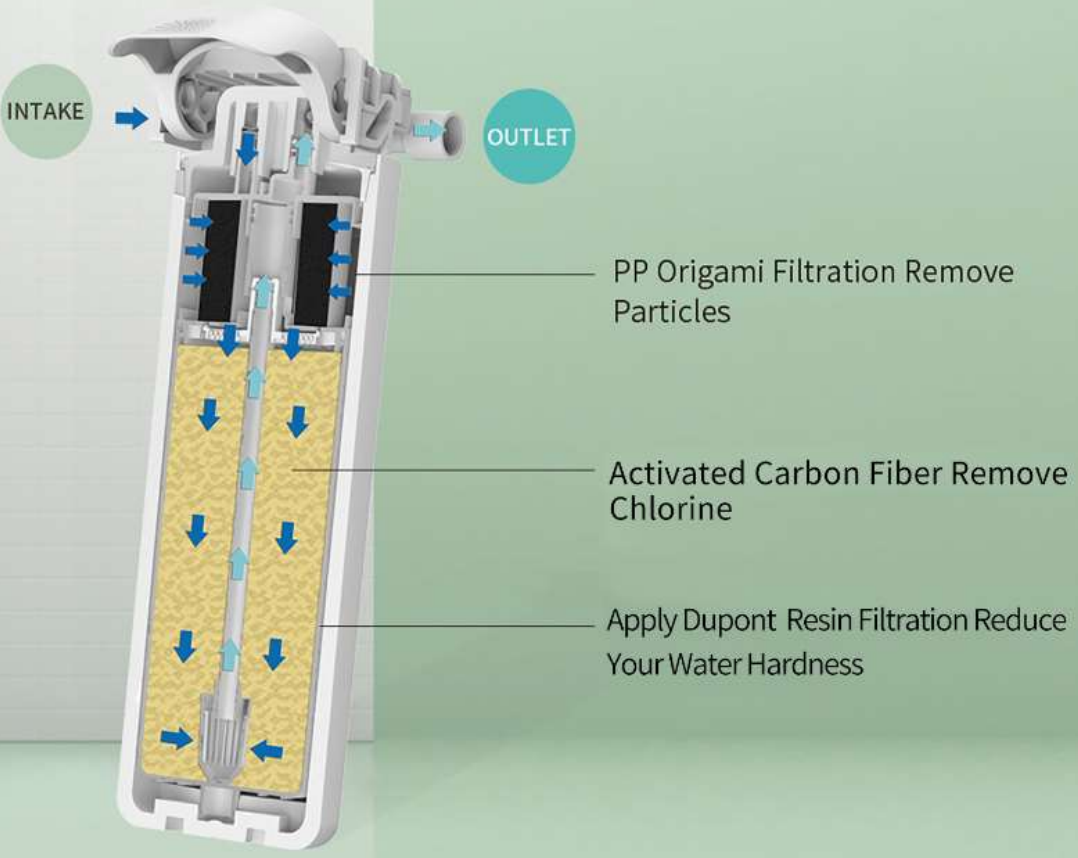

Applied Installation:

1, Wash Basin;

2, Bathroom



EASY CATRIDGE REPLACEMENT

- ① Open the cover
- ② Pull up the inner cover
- ③ Rotate off the cartridge for replacement

ONE WAY VALVE



PACKAGE INCLUDES



⑦ PACKAGE BOX

① BSW WATER SOFTENER (HEAD+CARTRIDGE)

② MANUAL

③ SS BRAIDED PIPE

④ SCREWS

⑤ QUICK CONNECTORS

⑥ ANCHORS

Shower Filter



BEFORE

AFTER


Soft Skin Hair Repair Nails Improve

The image is a composite graphic illustrating the benefits of the shower filter. It is divided into two main sections: 'BEFORE' and 'AFTER', separated by a diagonal line. In the 'BEFORE' section, a woman is shown from behind, showering with a standard showerhead. The water is depicted as a spray of small droplets. In the 'AFTER' section, the same woman is shown from the front, showering with the AquaSpace filter installed. The water is shown as a soft, rain-like shower. A central graphic shows the filter disassembled, with a splash of blue water next to it. Below the 'AFTER' section, three small inset images show: 1) hands being washed with soap, labeled 'Soft Skin'; 2) a woman's long, healthy hair, labeled 'Hair Repair'; and 3) a woman's hands, labeled 'Nails Improve'.

Filtration Feature

Applied Installation:

1, Kitchen; 2, Bathub; 3, Shower Head

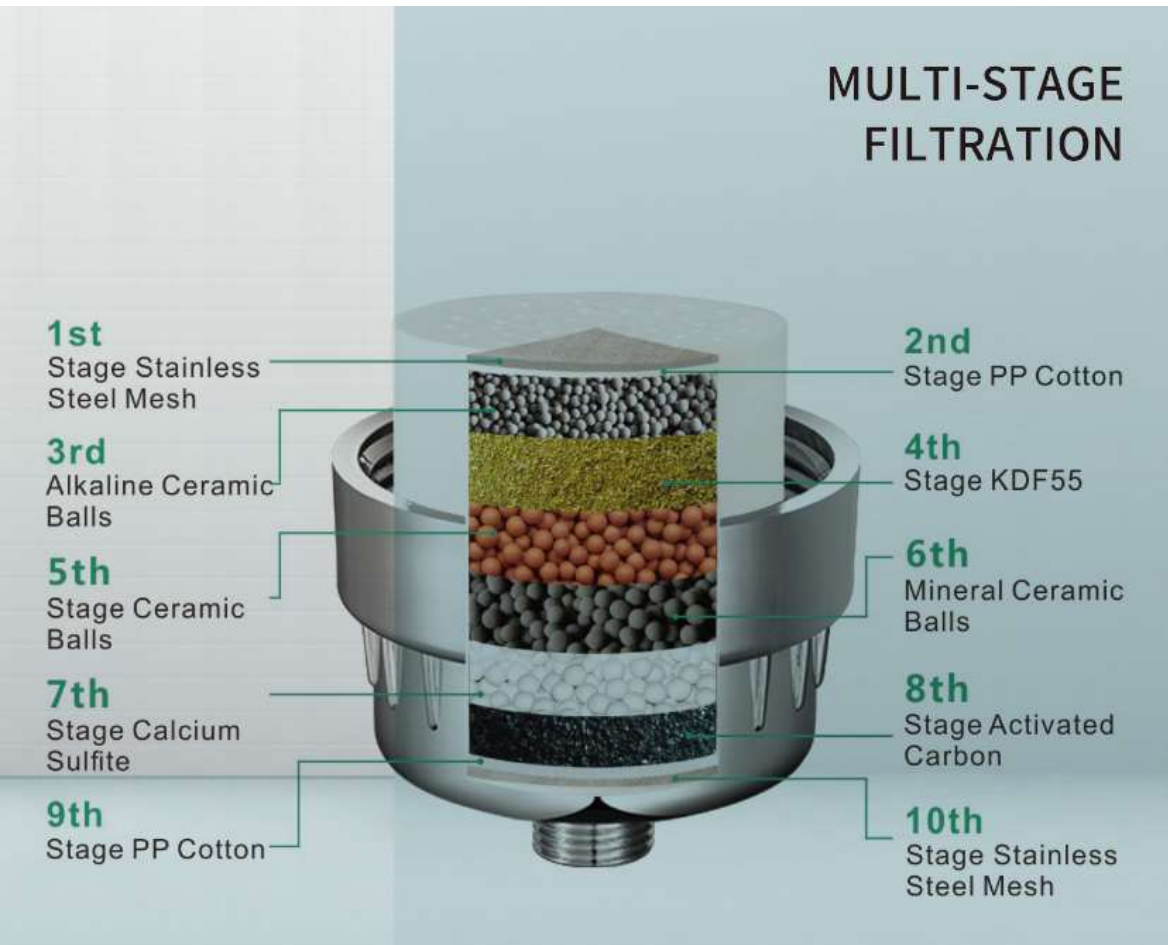

NO TOOL INSTALLATION- EASY AND FAST



AquaSpace

1

Flush the filter cartridge before use (10-15s)



AquaSpace

2

Remove the existing shower head



AquaSpace

3

Wrap teflon tape (3-4turns)



AquaSpace

4

Wrap teflon tape (3-4turns)



AquaSpace

5

Place O ring rubbers



AquaSpace

6

Turning clockwise (by hand)

PACKAGE INCLUDES



① PACKAGE BOX



② FILTER SHELL



③ INNER FILTER CARTRIDGE



④ TEFLON TAPE



⑤ SILCONS-RINGS



⑥ USER MANUAL

FITS VARIOUS SHOWER TYPES



Handheld



Fixed



Rain




Tap

A6 Smart Toilet

NEW!



VC300

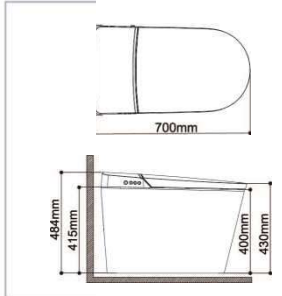


A7 Water efficiency certification

NEW!



VC300

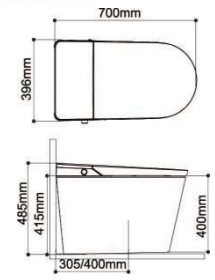

Item			Item			
Main Unit	Rated voltage	220V, 50Hz	Drying device	Warm air volume	More than 4 m/s	
	Rating power	1070W		Warm temperature		
	Water pressure range	0.08~0.8MPa			6 different level adjustment	
	Electrical wire	about1.5 m Long, Electrical leakage protector		Heating power	250W	
	Waterproof	IPX4		Safety device	Temperature sensor, Leakage protection plug	
Cleaning device	Heating method	Instant heating	Heated seat	Surface temperature	6 different level adjustment	
	Heating power	1600W		Heating power	50W	
	Anti-bacterial material	Nozzle antibacterial		Open and close device	Quiet slow down device, Auto lid open/close is optional	
	Water temperature	6 different level adjustment		Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.	
	Cleaning flow	3 gear adjustment		Safety device	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse	
	Cleaning mode	Buttock wash/mobile wash, women wash/mobile wash/Pulse massage			Anti-bacterial material	Anti-bacterial seat
	Spray cleansing location	5 different level adjustment		Intelligent setup	Night light assembly	Intelligent, Normally off
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies			Deodorant	Diatom deodorization
	Anti-fouling device	Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device			Flushing mode	Automatic / remote control flush toilet and hand wash toilet.
	Safety device	Leakage protection plug, Water level sensor, Temperature sensor, Bimetallic thermostat, Thermostat protection, leakage - protection plug		Energy saving setting	ECO energy saving	
		Operation mode	Host + remote controller			
		Toilet performance	5 liter scour			
			305/400mm is adjustable			
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.					


Item			Item			
Main Unit	Rated voltage	220V, 50Hz	Drying device	Warm wind speed	More than 4 m/s	
	Rating power	1070W		Warm temperature		
	Water pressure range	0.08~0.8MPa			6 different level adjustment	
	Electrical wire	about1.5 m Long, Electrical leakage protector		Heating power	250W	
	Waterproof	IPX4		Safety device	Temperature sensor, Bimetallic thermostat temperature fuse	
Cleaning device	Heating method	Instant heating	Heated seat	Surface temperature	6 different level adjustment	
	Heating power	1600W		Heating power	50W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle		Open and close device	Quiet slow down device	
	Water temperature	6 different level adjustment		Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.	
	Water volume	3 different level adjustment		Safety device	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse	
	Cleaning mode	Buttock wash/mobile wash, women wash/mobile wash/Pulse massage			Anti-bacterial material	Anti-bacterial seat
	Spray cleansing location	5 different level adjustment		Intelligent set-up	Night light assembly	Intelligent, Normally off
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies			Deodorant	Diatom deodorization
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device			Flushing mode	Automatic / remote control flush toilet and hand wash toilet.
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection		Energy saving setting	ECO Energy saving	
		Operation mode	Host + remote controller			
		Toilet performance	5 liter scour			
			305/400mm is adjustable			
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.					

A8 Water efficiency certification



EWI


VC300

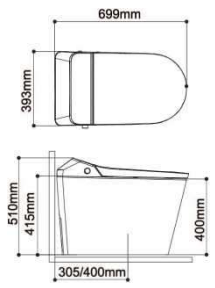

A9 Water efficiency certification



VC300




Item		Item	
Main Unit	Rated voltage	220V, 50Hz	Drying device
	Rating power	1070W	
	Water pressure range	0.08-0.8MPa	
	Electrical wire	about 1.5 m Long, Electrical leakage protector	
	Waterproof	IPX4	
Cleaning device	Heating method	Instant heating	Heated seat
	Heating power	1600W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle	
	Water temperature	6 different level adjustment	
	Water volume	3 different level adjustment	
	Cleaning mode	Buttock wash/mobile wash, women wash/mobile wash/Pulse massage	
	Spray cleansing location	5 different level adjustment	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection	
Intelligent set-up	Night light assembly	Intelligent, Normally off	Toilet performance
	Deodorant	Reacting without light	
	Remote control	5liter Dual flush, more water-saving	
	ECO Energy saving	305/400mm is adjustable	
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.		

Item		Item	
Main Unit	Rated voltage	220V, 50Hz	Drying device
	Rating power	1070W	
	Water pressure range	0.08-0.8MPa	
	Electrical wire	about 1.5 m Long, Electrical leakage protector	
	Waterproof	IPX4	
Cleaning device	Heating method	Instant heating	Heated seat
	Heating power	1600W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle	
	Water temperature	6 different level adjustment	
	Water volume	3 different level adjustment	
	Cleaning mode	Buttock wash/mobile wash, women wash/mobile wash/Pulse massage	
	Spray cleansing location	5 different level adjustment	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection	
Intelligent set-up	Night light assembly	Intelligent, Normally off	Toilet performance
	Deodorant	Reacting without light	
	Remote control	5liter Dual flush, more water-saving	
	ECO Energy saving	305/400mm is adjustable	
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.		



VC300

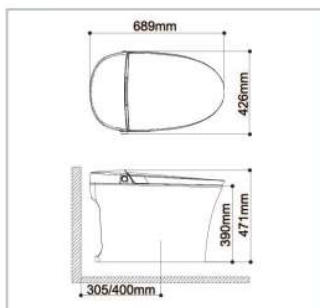


V8300/V8700

Water efficiency certification




VC200

One-piece Intelligent Toilet **V8300**
Auto lid open/close **V8600**

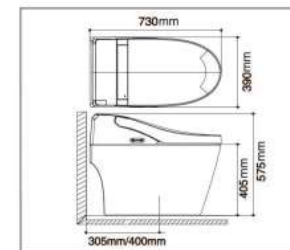

VC200

One-piece Intelligent Toilet **V8700**
Auto lid open/close **V8200**

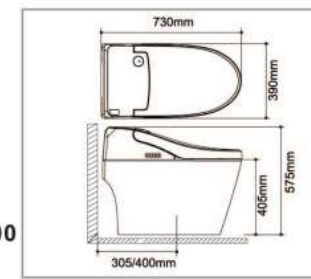

Item			Item		
Main Unit	Rated voltage	220V, 50 Hz	Drying device	Warm air volume	More than 4 m/s
	Rating power	1080W Maximum power 1635W		Warm temperature	6 different level adjustment
	Water pressure range	0.07-0.8MPa		Heating power	250W
	Electrical wire	1.5m Long, Electrical leakage protector		Safety device	Temperature sensor, Leakage protection plug
	Waterproof	IPX4			
Cleaning device	Heating method	Instant heating	Heated seat	Surface temperature	6 different level adjustment
	Heating power	1600W		Heating power	50W
	Anti-bacterial material	Nozzle antibacterial		Open and close device	Quiet slow down device,
	Water temperature	6 different level adjustment		Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.
	Cleaning flow	3 gear adjustment		Safety device	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse
	Cleaning mode	Buttock wash/mobile wash, women wash/mobile wash	Anti-bacterial material	Anti-bacterial seat	
	Spray cleansing location	5 different level adjustment	Night light assembly	Intelligent, Normally off	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	Deodorant	Diatom deodorization	
	Anti-fouling device	Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	Flushing mode	Automatic / remote control flush toilet and hand wash toilet.	
	Safety device	Leakage protection plug, Water level sensor, Temperature sensor, Bimetallic thermostat, Thermostat protection, leakage - protection plug	Energy saving setting	ECO energy saving	
		Operation mode	Host + remote controller		
		Toilet performance	5 liter scour 305/400mm is adjustable		
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.				

Item			Item		
Main Unit	Rated voltage	220V, Hz	Drying device	Warm wind speed	Over 4M/S
	Rating power	1105W		Warm temperature	6 different level adjustment
	Water pressure range	0.07~0.8MPa		Heating power	250W
	Electrical wire	1.5m Long, Electrical leakage protector		Safety device	Temperature sensor, Bimetallic thermostat, temperature fuse
	Waterproof	IPX4			
Cleaning device	Heating method	Instant heating	Heated seat	Surface temperature	6 different level adjustment
	Heating power	1600 W		Heating power	50W
	Anti-bacterial material	Anti-bacterial boom jet nozzle		Open and close device	Quiet slow down device, Auto lid open/close is optional
	Water temperature	6 different level adjustment		Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.
	Water volume	0.4~0.6L/min		Safety device	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse
	Cleaning mode	Rear cleaning / Rear massage feminine cleaning	Cut at high temperature	Electricity cut off at high temperature	
	Spray cleansing location	5 different level adjustment	Anti-bacterial material	Anti-bacterial seat	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	Night light assembly	Intelligent, Normally off	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	Deodorant	Activated carbon deodorant	
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection	Remote control	Automatic flush/Remote control flush	
		Toilet performance	6 liter/4liter Dual flush, more water-saving 305/400mm is adjustable		
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.				

AquaSpace


V8800



Water efficiency certification



VC300

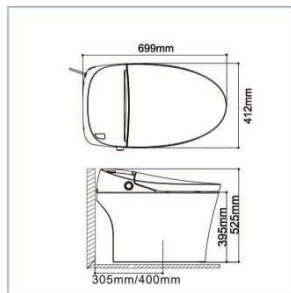

V8800

Item		Item	
Main Unit	Rated voltage	220V, Hz	Drying device
	Rating power	1105W	
	Water pressure range	0.07-0.8MPa	
	Electrical wire	1.5m Long, Electrical leakage protector	
	Waterproof	IPX4	
Cleaning device	Heating method	Instant heating	Heated seat
	Heating power	1600W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle	
	Water temperature	6 different level adjustment	
	Water volume	0.4-0.6L/min	
	Cleaning mode	Rear cleaning / Rear massage feminine cleaning	
	Spray cleansing location	5 different level adjustment	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection	
Intelligent set-up	Toilet performance	6 liter/4liter Dual flush, more water-saving	Intelligent set-up
		305/400mm is adjustable	
Safe water temperature device	Unique design with automatic water-break device, to ensure water cuts off when water temperature is higher than safe water temperature.		

ONE-PIECE INTELLIGENT TOILET

Remote control(Optional)



VC200



VC100




VC300

V2700




VC3100




Item		Item	
Main Unit	Rated voltage	220V, 50Hz	Drying device
	Rating power	1080W	
	Water pressure range	0.07-0.8MPa	
	Electrical wire	1.6m Long, Electrical leakage protector	
	Waterproof	IPX4	
Cleaning device	Heating method	Instant heating	Heated seat
	Heating power	1600W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle	
	Water temperature	6 different level adjustment	
	Water volume	3 different level adjustment	
	Cleaning mode	Rear cleaning / Rear massage feminine cleaning	
	Spray cleansing location	5 different level adjustment	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-siphon device, Anti-backflow device, Filter device	
	Safety device	Water level sensor, Temperature sensor, Bimetallic thermostat, Automatic disconnecting upon electric leakage, Over-temperature protection	
Intelligent set-up	Toilet performance	Warm wind air volume	Over 0.2m ³ /min
		Warm temperature	6 different level adjustment
		Heating power	230W
		Safety device	Temperature sensor, Bimetallic thermostat, temperature fuse
Intelligent set-up	Toilet performance	Surface temperature	6 different level adjustment
		Heating power	50W
		Open and close device	Quiet slowdown device, Auto lid open/close is optional
		Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.
Intelligent set-up	Toilet performance	Safety device	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse
		Cut at high temperature	Electricity cut off at high temperature
		Anti-bacterial material	Anti-bacterial seat
		Intelligent set-up	Night light assembly
Intelligent set-up	Toilet performance	Deodorant	Intelligent, normally off, normally on
		User ID Setting	Diatom pure deodorizing



- Container capacity 400ml
- Remote control(Optional) VC100 VC200
- Auto lid open/close and slow-closing is optional

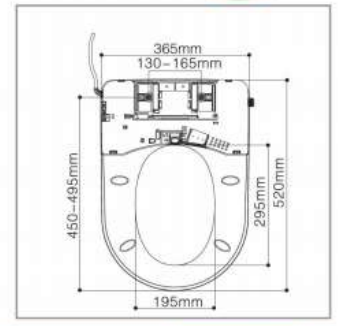


- Container capacity 600ml
- Without remote control

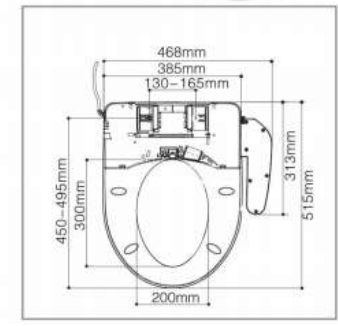

Item		Item	
Main Unit	Rated voltage	AC 220V, 50Hz	Drying device
	Rating power	1105W Maximum power 1635W	
	Water pressure range	0.07-0.8MPa	
	Electrical wire	1.5m Long, Electrical leakage protector	
Cleaning device	Waterproof	IPX4	Heated seat
	Heating method	Instant heating	
	Heating power	1600W	
	Anti-bacterial material	Anti-bacterial boom jet nozzle	
	Water temperature	6 different level adjustment	
	Water volume	5 different level adjustment	
	Cleaning mode	Rear cleaning / Rear massage	
	Spray cleansing location	5 different level adjustment	
	Water pressure protector	Rear cleaning / Rear massage Front cleaning for ladies	
	Anti-fouling device	Speedy water discharge device, Automatic cleaning nozzle, Anti-syphon device, Anti-backflow device, Filter device	
Intelligent set-up	Water level sensor, Temperature sensor, Bimetallic thermostat, Safety device	Automatic disconnecting upon electric leakage, Over-temperature protection	Intelligent set-up
	Warm wind speed	Over 4M/S	
	Warm temperature	6 different level adjustment	
	Heating power	250W	
Main unit	Water pressure range	0.07-0.8MPa	Cleaning device
	Electrical wire	1.5m Long, Electrical leakage protector	
	Waterproof	IPX4	
	Warm wind speed	Over 4M/S	
	Warm temperature	6 different level adjustment	
	Heating power	250W	
	Safety device	1 temperature sensor, bimetallic thermostat, temperature fuse	
	Surface temperature	6 different level adjustment	
	Heating power	50W	
	Open and close device	Quiet slow down device, Quick-release assembly	
Heated seat	Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.	Safety device
	Anti-bacterial material	Anti-bacterial seat	
	Seating sensor, Temperature sensor, Bimetallic thermostat, Temperature fuse	6 different level adjustment	
	Electricity cut off at high temperature	Electricity cut off at high temperature	
Executive standard of the Product	Night light assembly	Intelligent, Normally off	Executive standard of the Product
	Deodorant	Activated carbon deodorant	
	User ID setting	To avoid disturbance from remote controls by multi-user.	
Caring device	User ID setting	To avoid disturbance from remote controls by multi-user.	Executive standard of the Product

Item		Item	
Main unit	Rated voltage	AC 220V, 50Hz	Cleaning device
	Rating power	1200W Maximum power 1050W	
	Water pressure range	0.07-0.8MPa	
	Electrical wire	1.5m Long, Electrical leakage protector	
	Waterproof	IPX4	
	Warm wind speed	Over 4M/S	
	Warm temperature	6 different level adjustment	
	Heating power	250W	
	Safety device	1 temperature sensor, bimetallic thermostat, temperature fuse	
	Surface temperature	6 different level adjustment	
Heated seat	Heating power	50W	Safety device
	Open and close device	Quiet slow down device, Quick-release assembly	
	Heated burning protection	The seat temperature will automatically lower to level 1 in 10 minutes after using.	
	Anti-bacterial material	Anti-bacterial seat	
Caring device	User ID setting	To avoid disturbance from remote controls by multi-user.	Executive standard of the Product


V8100-01

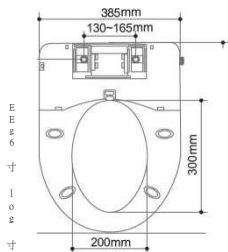


V8900



V8900	Mounting plate available	Item	B
	OM	PW060301 PW060302	135-165mm 185-215mm

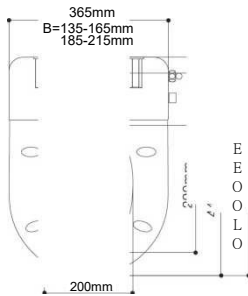


V8100-03

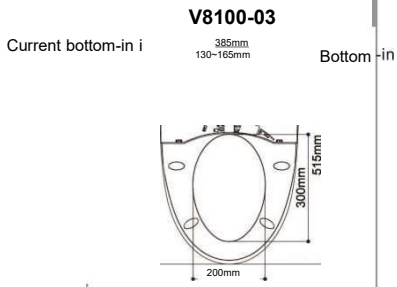


- For special ceramic toilet
- Bottom water inlet and current input

V8902

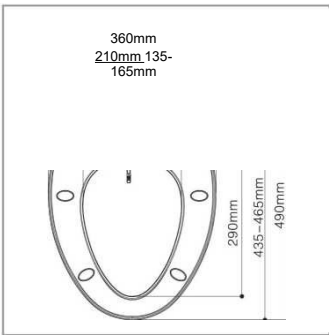

V8100-04



Item	Non-electronic bidet seat	
Main unit	Energy-saving and environmentally friendly	It is driven by water instead of electricity, energy-saving and environmentally friendly
	Water pressure range	0.07-0.5MPa
	Dimension	500*365*60mm(LxWx H)
Caring device	Open and close device	slow down seat and lid, noise-free
	Safety device	Quick-release system, easy installation
Cleaning device	Cleaning mode	Rear and feminine cleaning
	Cleaning water flow	Bubble water, soft and comfortable
	Water pressure protector	water pressure stabilizing device
	Anti-fouling device	Filter installed, anti-syphon and anti-backflow function. Nozzle self-cleaning, anti-bacterial and can be disassembled for cleaning.
	Water volume adjustment	Rotate the button to adjust water volume.



Hygiene washing



Operation lever
• For rear and feminine cleaning

urinal system

Automatic flushing provides more hygiene.





INDUCTION FLUSHING DEVICE

D600031


TOILET FLUSHOMETER™

NEW!

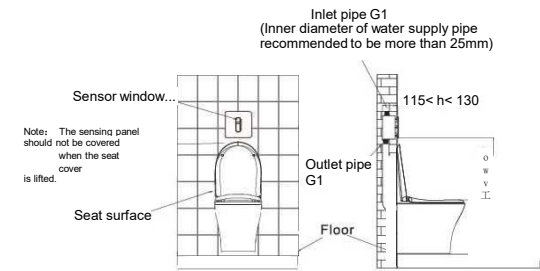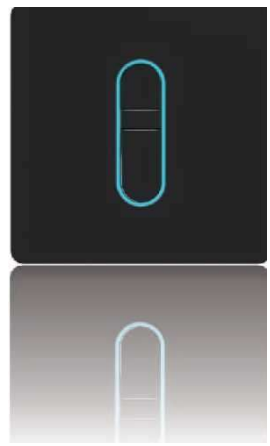


Note: Distance shall be adjusted on different seat covers and make sure sensing panel not be covered when the cover is lifted.

Inlet pipe G1 (Inner diameter of water supply pipe recommended to be more than 25mm)

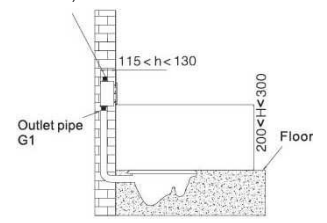

Power	DC: 4 "AA" size alkaline batteries AC:100V-240V / 50/60Hz
Working temperature	1-45t:
Sensing distance	800-900mm (adjust sensor range automatically)
Sensor activation	> 6 seconds after entering sensing distance
Time Delay before flushing	Flushing after leaving sensing distance 5 seconds
Water inlet thread	External thread G1
Water outlet thread	Outlet diameter: connect to OD32mm discharge pipe
Working pressure	Dynamic pressure range 0.1MPa- Static pressure range 0.8MPa (Inner diameter of water supply pipe larger than 25mm is recommended)
Flush volume	Nine levels of flush volume, can be adjusted by remote-control
Mechanical push button	Mechanical push button ensures normal flushing function when power off

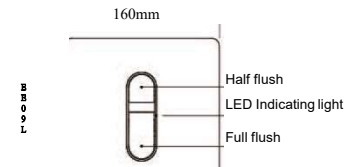

INDUCED FLUSHING

G30035 Pneumatic cistern



G30035
Pneumatic cistern I






G30035
Pneumatic cistern II



G30035
Pneumatic cistern III

G30035
Pneumatic cistern IV

Unit:mm

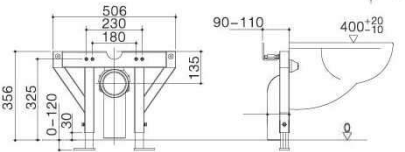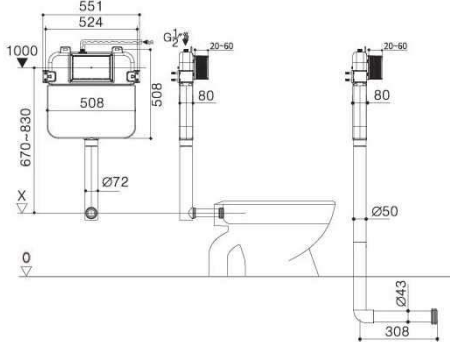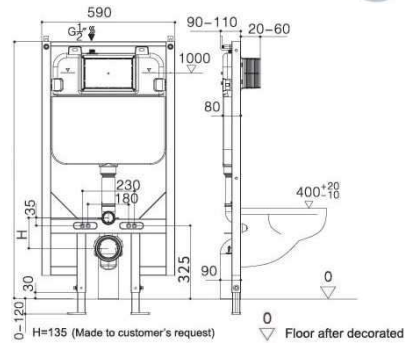

Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5L
Actuator Size: 245x165mm	Front push
Designed for wall hung toilet Designed for floor mounted toilet or squat toilet	Applicable for solid walls and dry build up wall (plasterboard)


Optional Actuators for Pneumatic operation



G3004DC/G3004DE/G3004DA





G3004DC

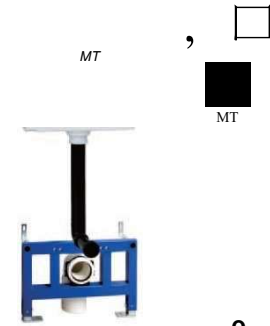

G3004DE

G3004DA

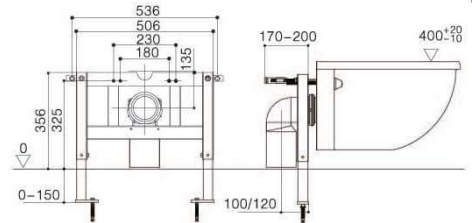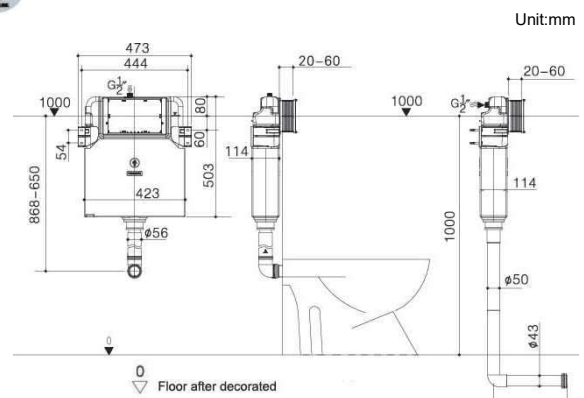

Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5L
Actuator size: 245x165mm	Front push
Designed for wall-hung toilet Designed for floor mounted toilet or squat toilet	Applicable for solid walls and dry build up wall (plasterboard)


Optional Actuators for Mechanical operation



Actuator Size: 245x165mm


G3004A

G3004AD

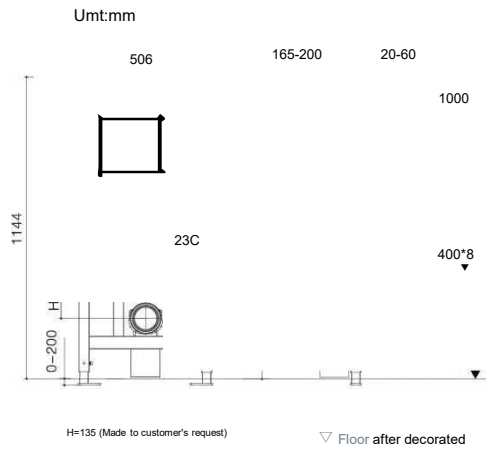

Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5L
Actuator Size: 245x165mm Designed for wall-hung toilet	Front push Applicable for solid walls and dry build up wall (plasterboard)


G3004A

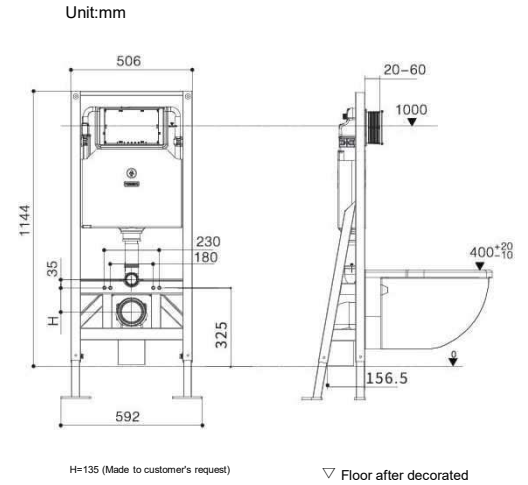

Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5L
Actuator Size: 245x165mm Designed for wall-hung toilet	Front push Applicable for solid walls and dry build up wall (plasterboard)

G3004AD
No loadbearing wall


Optional Actuators for Mechanical operation

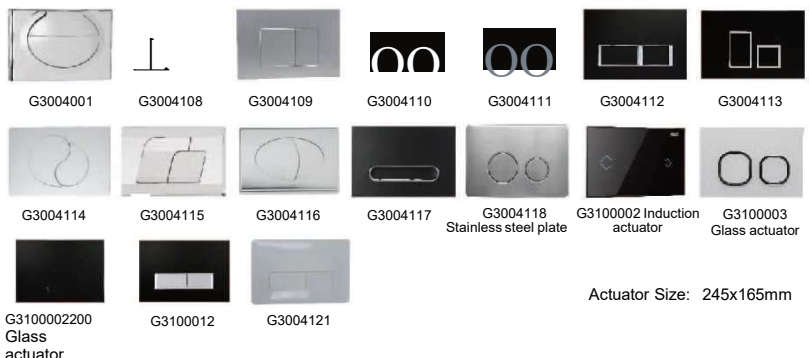



Optional Actuators for Mechanical operation



D6000

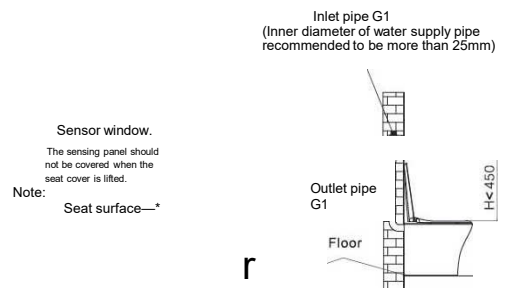


Note: Distance shall be adjusted on different seat covers and make sure sensing panel not be covered when the cover is lifted.

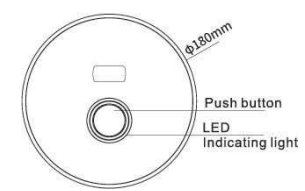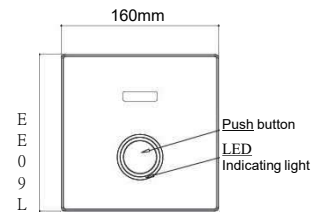

D6003



Power	DC: 4 "AA" size alkaline batteries AC:100V-240V/50/60Hz
Working temperature	1-45°
Sensing distance	800-900mm (adjust sensor range automatically)
Sensor activation	> 6 seconds after entering sensing distance
Time Delay before flushing	Flushing after leaving sensing distance 5 seconds
Water inlet thread	External thread G1
Water outlet thread	Outlet diameter: connect to OD32mm discharge pipe Dynamic pressure range 0.1 MPa- Static pressure range 0.8MPa (Inner diameter of water supply pipe larger than 25mm is recommended)
Flush volume	Nine levels of flush volume, can be adjusted by remote-control
Mechanical push button	Mechanical push button ensures normal flushing function when power off

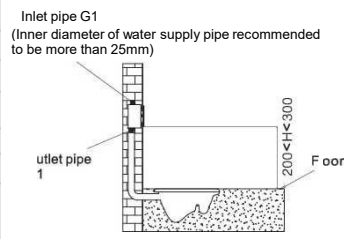

D300031

NEW!

URINAL SENSOR




130mm

E
E
O
S
L

0



LED indicating light

Manual push button

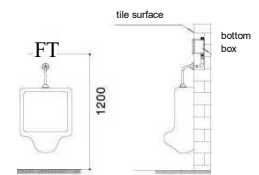

Power:	AC: 100V-240V/50/60HZ
temperature	1-45°
Sensing distance	Factory set is 65cm (adjustable), sensing distance can be adjusted by remote-control
Water inlet thread	External thread G1/2
Working pressure	Static pressure range 0.05Mpa-0.8MPa

D3000

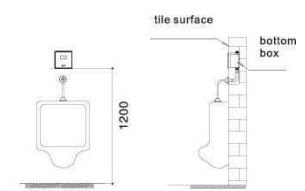


D3100



Power:	DC: 4 "AA" size alkaline batteries AC: 100V-240V/50/60Hz
temperature	1.45P
Battery life	About 2 years based on average 4000 flushing cycles per month
Sensing distance	Factory set is 65cm (adjustable), sensing distance can be adjusted by remote-control
Water inlet thread	External thread G1/2
Working pressure	Static pressure range 0.05Mpa-0.8MPa

D32001

URINAL SENSOR VQ

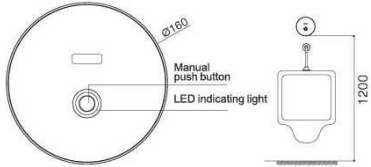

Power:	AC: 100V~240V/50/60Hz
Working temperature	1-45P
Sensing distance	Factory set is 65cm (adjustable), sensing distance can be adjusted by remote-control
Water inlet thread	External thread G1/2

Working pressure Static pressure range 0.05Mpa-0.8MPa

FEATURES'^

- Water saving**
 The faucet activates water flow automatically when users' hands enter the detection zone and turns itself off after hands are removed. Using fuzzy induction logic to avoid refraction from beam and mirror, so as to prevent faucet continue to run water and misoperation of fuzzy induction.
- Automatic adjustment of sensing distance**
 The sensor faucet will automatically adjust sensing distance according to using surrounding.
- Self-defence of auto-cutting electricity**
 The sensor valve core can be closed automatically while in operation or not, when the sensor is out of electricity, falling off or breaking of batter box wires.
- Hygiene sanitary**
 The electronic faucet activates water flow and stops automatically. No physical contact is necessary, assuring sanitary protection.
- Front installed sensor**
 Tiny sensor positioned in water outlet to assure more precise sensing and can be protected from cleanser and cleaning fluids that can damage the sensor faucet, while cleaning the faucet.
- Intelligent function**
 If an object is in view continuously for thirty seconds, the faucet will automatically shut off. The faucet will remain off until the object is removed.
 If an users' hand entering into detection zone for one minute, the faucet will automatically shut off.

Power	DC 4 "AA" size alkaline batteries
Working temperature	AC: 100V~240V/50/60Hz
Sensing distance	1^45^
Water inlet thread	G1/2
Working pressure	Static 0.05Mpa-0.8MPa


D5000 Sensor Faucet




D5001 Sensor Faucet



D5002 Sensor Faucet

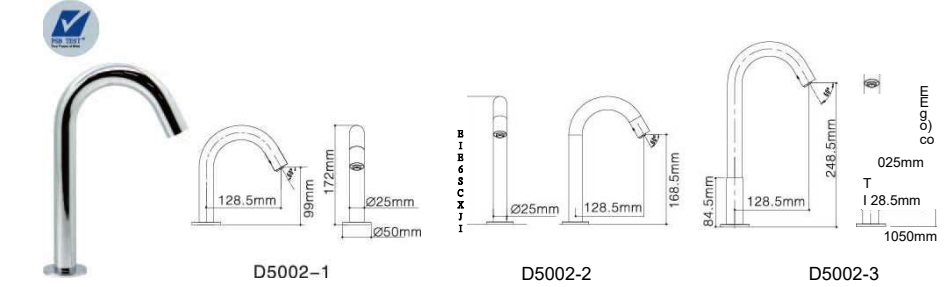


D3200

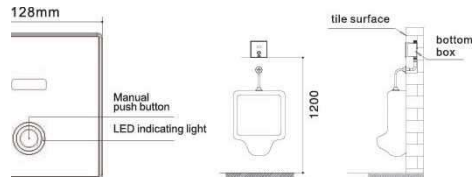

Power:	AC: 100V~240V/50/60Hz
Working temperature	1-45t
Sensing distance	Factory set is 65cm (adjustable), sensing distance can be adjusted by remote-control
Water inlet thread	External thread G1/2
Working pressure	Static pressure range 0.05Mpa-0.8MPa

CONCEALED CISTERN

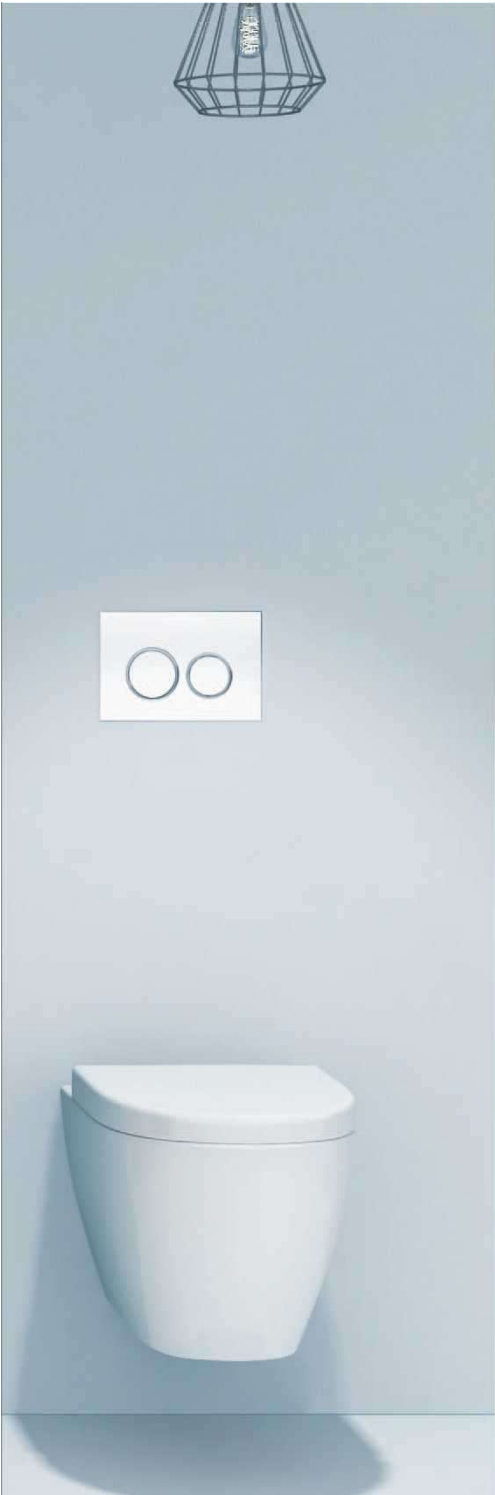

CONCEALED CISTERN

- More flexibility in your bathroom.
- Greater design, space-saving and sustainable quality




G3009 Pneumatic cistern

Unit:mm



G3009EB G3009EA

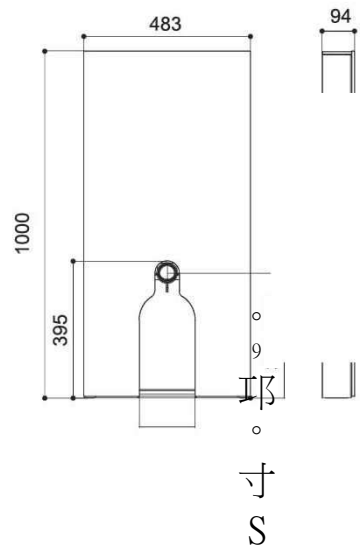


Concealed Cistern	
Water volume adjustment	3L-6L / 3L-4.5L
Actuation Mode: Top Pneumatic Dual Flush Button / Front Pneumatic Dual Flush Button	
Floor type toilet	Glass face plate and glass top lid (tempered glass with optional colors) Stainless steel side panel

G31 Series



G3107DA

G3107DB

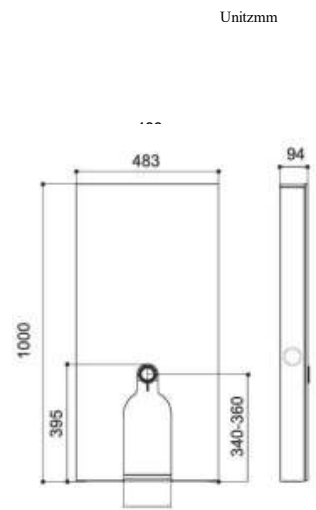


Concealed Cistern	
Water volume adjustment	3L-6L / 3L-4.5L
Actuation Mode: Top Inductive Dual Flush / Front Inductive Dual Flush	
Floor type toilet	Glass face plate and glass top lid (tempered glass with optional colors) Stainless steel side panel

G31 Movable concealed cistern (height adjustable)



G3103BA

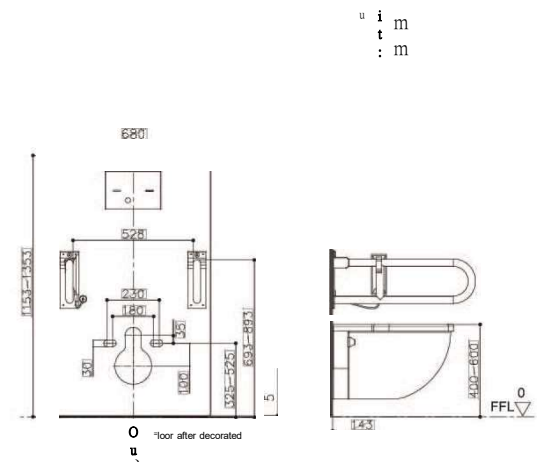

External moveable concealed cistern		
Size	1153X680X143mm	Water volume adjustment
Closestool height		400-600mm
Decorative board color		White/Black
Bearing weight		400kg
Designed for wall-hung toilet (念滑麗既滑閉聲聽d)		

Optional Actuators for Mechanical operation



G31 Series




G3103AA

External moveable concealed cistern			
Size	1405X680X228mm	Water volume adjustment	3L-6L / 3L-4.5
Closestool height	400-600mm	Decorative board color	White / Black
Bear weight	400kg		
Designed for wall-hung toilet		Applicable for solid walls and dry build up wall (plasterboard)	

Optional Actuators for Mechanical operation



G31 External moveable concealed cistern

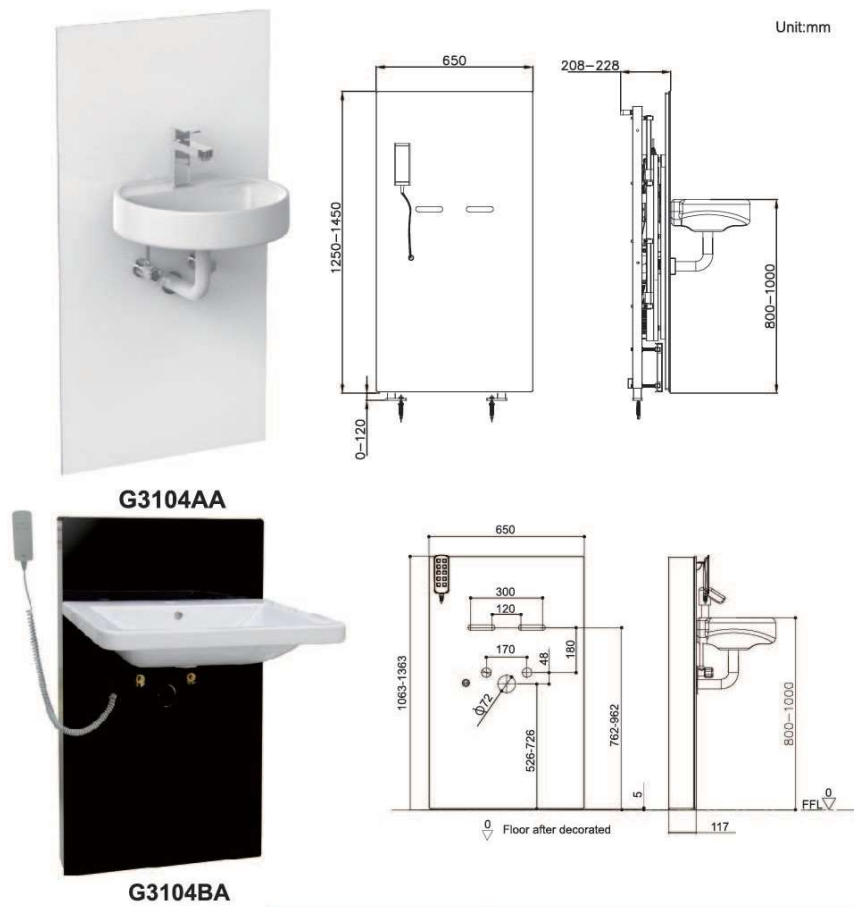


G3104AA

G3104BA

Movable frame for wash basin		
Model	3104AA	3104BA
Size	1063X650X117mm	1250X650X208mm
Face basin height	800-1000mm	800-1000mm
Bear weight	200kg	200kg
Decorative board color	White / Black	White / Black
For installation of solid walls or non-pulp walls	Applicable for solid walls and dry build up wall (plasterboard)	

G30034E

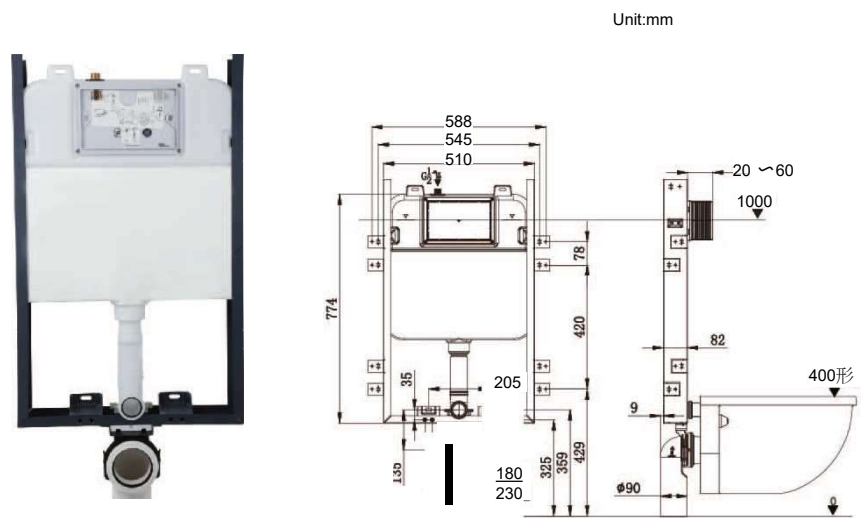

G30034E


Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5
Actuator Size: 245x165mm Designed for wall-hung toilet	Front push Applicable for solid walls and dry build up wall (plasterboard)

Optional Actuators for Mechanical operation



Actuator Size: 245x165mm

G3007

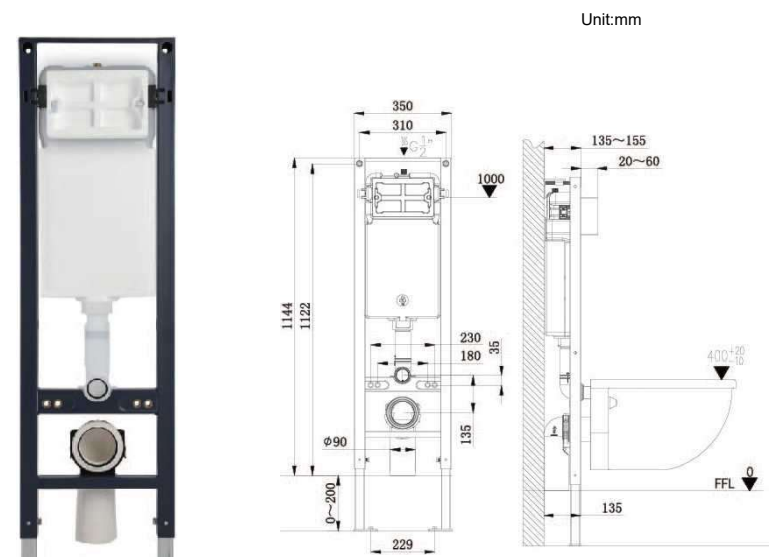

Install the vertical wall of water tank

G3007

Concealed Cistern	
Water volume adjustment	3L-6L/3L-4.5
Actuator Size: 245x165mm Designed for wall-hung toilet	Front push Applicable for solid walls and dry build up wall (plasterboard)

Installation drawing of water tank corner

Optional Actuators for Mechanical operation



Actuator Size: 245x165mm

CONCEALED CISTERNS

CONCEALED CISTERN

G3010

Unit:mm



G3010

Half/ush Full Flush






A2438006

Cable Dual Push Button



G3100011



Pneumatic drive operation with optional button



G3100011




G3100018

Features

.The water tank is molded by blow molding and is durable.

- Installed inside cabinet or wall for space saving.
- Optional side left and right inlet.
- Optional push button position.

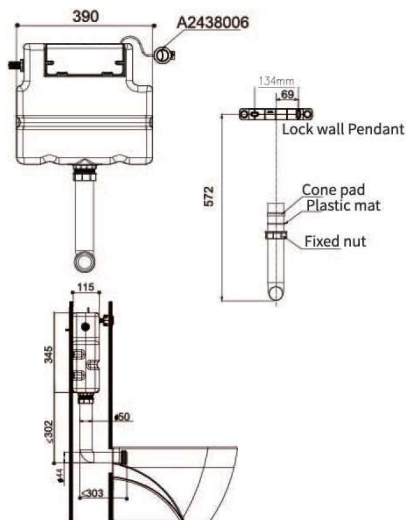

G3005A



G3005A
Mechanical cistern I




G3005AB
Mechanical cistern II



G3005AD

Concealed Cistern	
3L-6L/3L-4.5L	
Actuator Size: 210x140mm	Actuator operation (optional): Top push or front push
G3005AA Designed for wall-hung toilet G3005AB Designed for floor mounted toilet G3005AD Designed for floor mounted toilet	Applicable for solid walls and dry build up wall (plasterboard)

Unit:mm

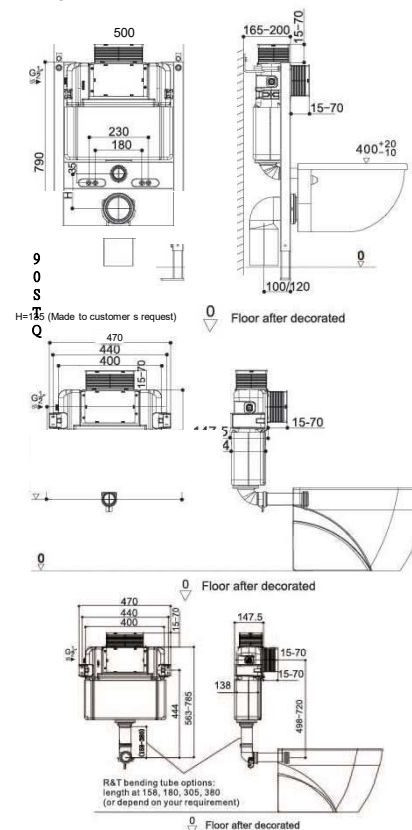

Optional Actuators for Mechanical operation



G30050051



G30050061



G30050071



G30050008



G30050009



G30050010

Pneumatic drive operation with optional button




G3100011



G30014A\G30013A\G30012A




G30014A
Basin frame

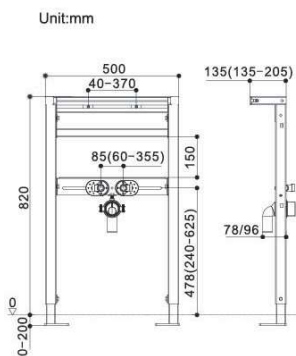

G30014A




G30013A
Bidet frame

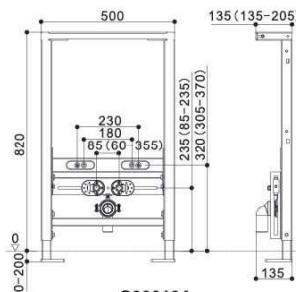

G30013A



G30012A
Wall-hung toilet frame

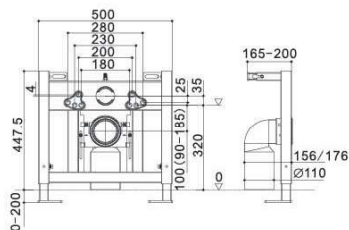

G30012A


Accessories for concealed cistern

Item/Code	Product	Item/Code	Product		
Vertical discharge PG30031260		Material : PVC Specification : Φ91 x Φ90	Vertical discharge PG30041550		Material : HDPE Specification : Φ91 x Φ90
Vertical discharge PG30041540		Material : HDPE Specification : Φ91 x Φ110	Vertical discharge PG30010050 PG30010051		Material : PVC Specification : Φ91 x Φ110
Horizontal discharge PG30010490		Material : PVC Specification : Φ91 x Φ114	Vertical discharge PG3003156		Material : HDPE Specification : Φ91 x Φ90
Item/Code	Product		Material	Specification	
Connecting pipe A PG30010030			HDPE	Φ89 x Φ121 x 180	
Connecting pipe B PG30010031				Φ89 x Φ121 x 230	
Straight pipe A PG30010170			PP	Φ45 x Φ50 x 183	
Straight pipe B PG30010171 (Big Flange)				Φ45 x Φ57 x 183 (Big Flange)	
Straight pipe C PG30010530				Φ45 x Φ50 x 245	
Adapter A PG30010540			PVC	Φ110.4 x Φ100.4	
Adapter B PG30010480				Φ114.5 x Φ90	
Adapter C PG30010460				Φ110.8 x Φ103	
ZH51			HDPE	Φ90 x Φ110	
Shifter ZH60			PVC	Φ91 x Φ114 x 430	
Sewage bend pipe ZH62			PP	Φ76 x Φ114	




Pneumatic button G31 00011
 • Chrome plated ABS
 • Installation dimension: 048mm

G3100011




Front dual actuator Size: 245x165mm

NEW




Operating mode: Induction actuator
 Matching concealed cisterns:
 G3004A, G3004AD, G3004DC, G3004A, G3004Dseries, G3008A, G3008Dseries, G3007

NEW




G3100002200 Glass actuator
 Operating mode: Mechanical
 Matching concealed cisterns: G310i0, G3102, G3106
 Finish: Black white (Made to customers request)




G3100002 Induction actuator
 Operating mode: Induction actuator
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV

G3004A, G3004Dseries, G3008A, G3008Dseries, G3007 Finish: Black




G3100003 Glass actuator
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV


G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Black white (Made to customers request)




G3100005 Plastic plate
 Operating mode: Pneumatic operation (4m extended air pipe)
 Matching concealed cisterns: G30035Pneumatic cistern I.II.IV
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3100006 Plastic plate
 Operating mode: Pneumatic operation (4m extended air pipe)
 Matching concealed cisterns: G30035Pneumatic cistern I.II.IV
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3100007 Glass actuator
 Operating mode: Pneumatic operation (4m extended air pipe)
 Matching concealed cisterns: G30035Pneumatic cistern I.II.IV
 Finish: white (Made to customer's request)



G3004108
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.H U M
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white





G3004109
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3004110
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3004111
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3004112
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3004113
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white



G3004114
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white



G3004115
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white



G3004116
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white


Top Push Actuators Size: 340x184mm

NEW




Pneumatic button G3100018
 • Chrome plated ABS
 • Installation dimension: 038 mm

NEW




G3004121
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white




G3005008
 Finish: Shining chrome, matte chrome, white, black, Ceramic white



G3004117
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004Ax, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white



G3004118
 Stainless steel plate
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 Finish: Metallic color




G3004001
 Operating mode: Mechanical
 Matching concealed cisterns: G3003Mechanical cistern I.II.IV
 G3004A, G3004Dseries, G3008A, G3008Dseries, G3007
 Finish: Shining chrome, matte chrome, white, black, Ceramic white

NEW




Pneumatic button G3100011
 • Chrome plated ABS
 • Installation dimension: 065mm





NEW



G3100019
 Operating mode: Mechanical Automatic flushing
 Matching concealed cisterns: G3101, G3102, G3106
 Finish: Primary color of stainless steel wire drawing




G3005009
 Finish: Metallic color

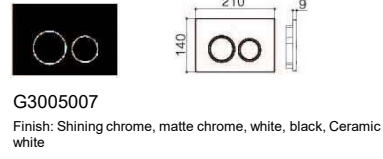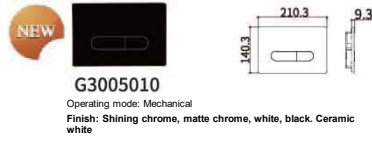


Installation drawing of concealed cistern

Installation drawing for metal frame Methods of water supply

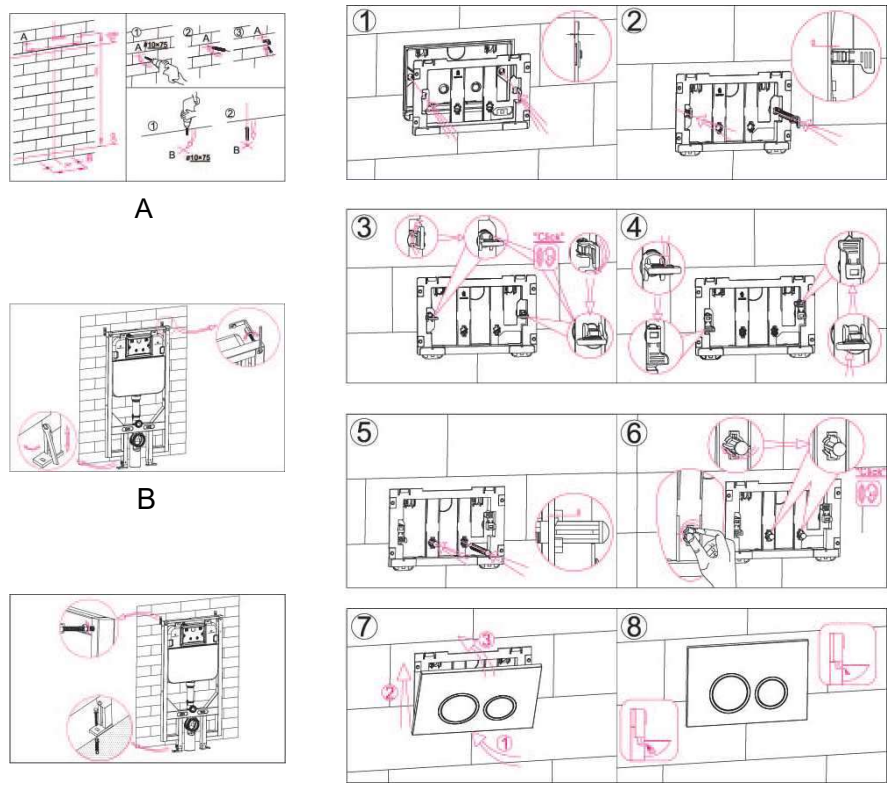


Installation drawing of concealed cistern

Installation drawing for wall-hung bowl

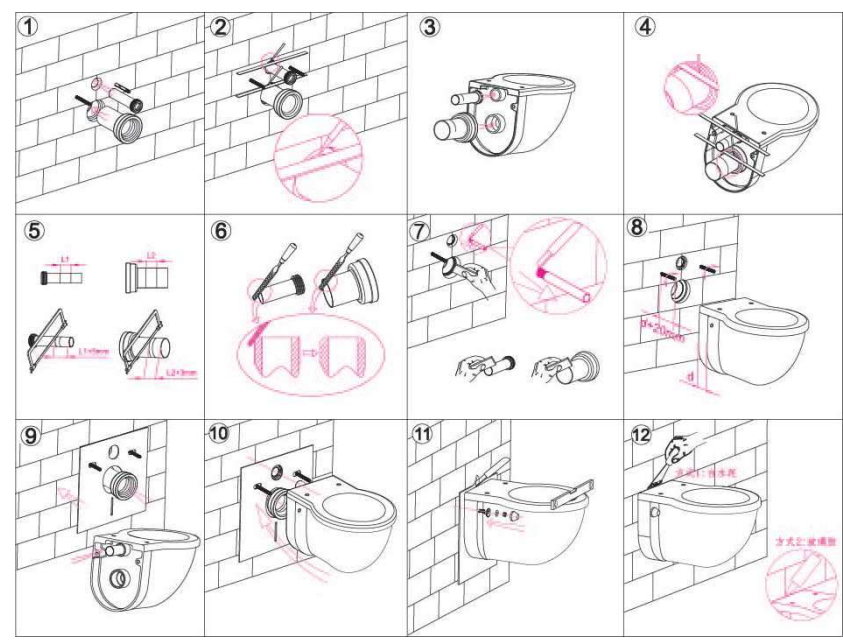

Installation drawing for discharge pipe

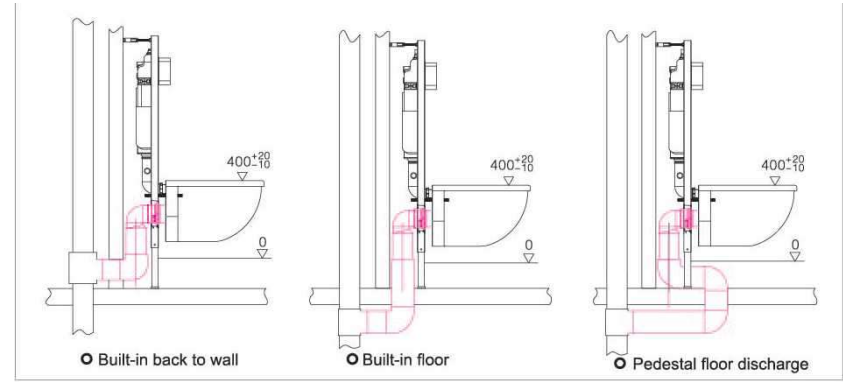

WATER-SAVING PLASTIC TANK



WALL-HUNG TANK



G21051


NEW!



G21051

Features

- Elegant and compact design
- Patented appearance design
- Optional finish of decorative strip, silver, champagne gold
- Easy installation
- Optional flushing volume: 7/4L, 6/3L

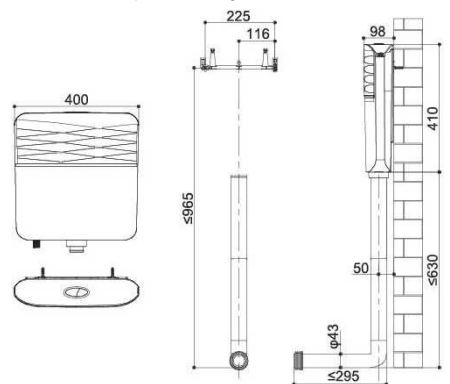

Flushing pipe directly inserts to cistern

Half Flush Full Flush



Patented lid-open structure



Bottom left inlet



Bottom right inlet

	LxWxH	Gross weight	Net weight
Master carton 5PCS	590x430x500mm	13.5kg	15kg
Inner Box	415x115x480mm	2.3kg	2.7kg

G21053


NEW!



G21053


Features

- First-class design, elegant and compact
- Patented appearance design
- Easy installation
- Optional flushing volume 7/4L, 6/3L

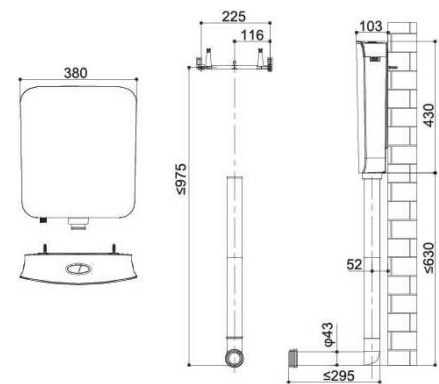

Flushing pipe directly inserts to cistern

Half Flush Full Flush



Patented lid-open structure



Bottom left inlet



Bottom right inlet

	LxWxH	Gross weight	Net weight
Master carton 5PCS	640x410x520mm	14kg	15.5kg
Inner Box	395x120x500mm	2.3kg	2.8kg




Features


- Infrared sensor flushing, automatic recognition of full and half flushing
- Optional AC 100v-240v/50-60Hz and DC (4 "AA" size alkaline battery)
- Modern design, easy installation and maintenance
- Patented appearance design
- Optional flushing volume: 7/4L, 6/3L



G22050

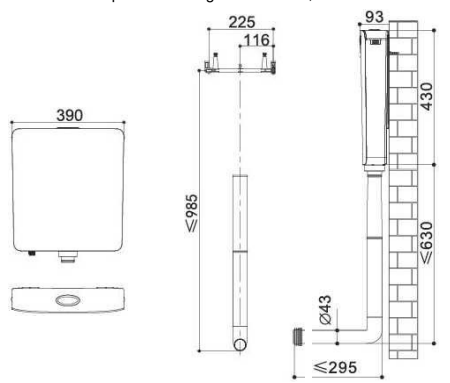

Flushing pipe directly inserts to cistern



Full Flush



Bottom left inlet



Patented lid-open structure



Non contact infrared induction effluent

	Lx WxH	Gross weight	Net weight
Master carton 5PCS	560x420x515mm	15.5kg	13kg
Inner Box	405x105x495mm	2.8kg	2.3kg




Features


- Unique design with a spilling hole for airfreshene
- Elegant and space save, more hygiene
- Easy installation
- Optional fushing volume 7/4L, 6/3L



G210502

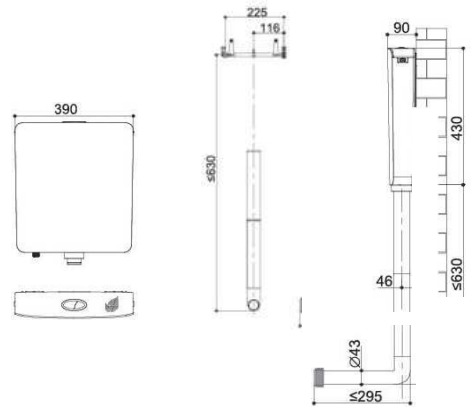

Flushing pipe directly inserts to cistern



Half Flush Full Flush



Patented lid-open structure



Bottom left inlet



Fragrance overflow hole, personalized pattern design

	LxWxH	Gross weight	Net weight
Master carton 5PCS	560x420x515mm	15.5kg	13kg
Inner Box	405x105x495mm	2.8kg	2.3kg

G21050


NEW!




G21050

Features

- Seamless one-piece design
- Patented appearance design
- Slim design of 90mm thickness, space saving
- Easy installation
- Optional flushing volume 7/4L, 6/3L

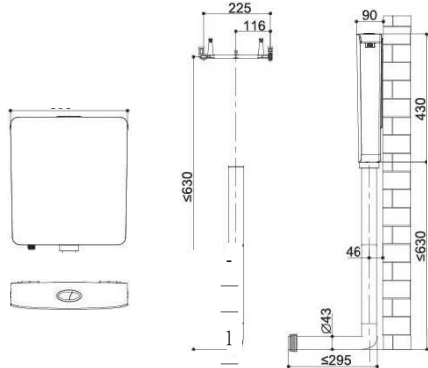

Half Flush Full Flush



Patented lid-open structure



Bottom left inlet



Bottom right inlet

Flushing pipe directly inserts to cistern

	LxWxH	Gross weight	Net weight
Master carton 5PCS	560x420x515mm	15.5kg	13kg
Inner Box	405x105x495mm	2.8kg	2.3kg

G21055


NEW!




G21055

Features

- Specially designed for children, more compact and secure
- Lovely and attractive design of pattern
- Patented appearance design
- Easy installation and maintenance
- Optional flushing volume: 7/4L, 6/3L

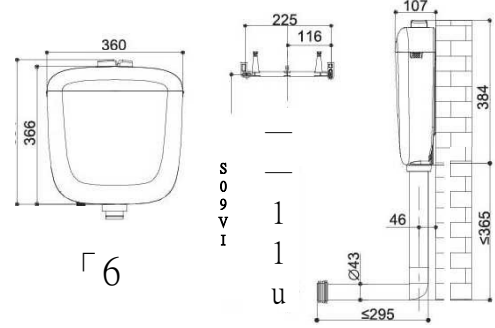

Half Flush Full Flush



Patented lid-open structure




Bottom left inlet




Bottom right inlet

G210880

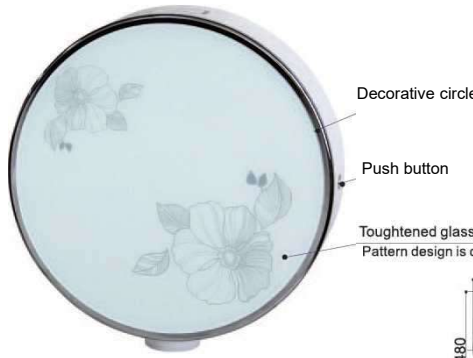

Decorative circle
Push button

Toughened glass tank panel
Pattern design is customized

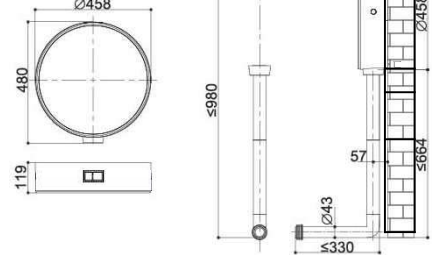

G210880

Half Flush Full Flush




G210880000 Dual Push Button



Push button



Decorative circle
Decorative circle in patting fine silver

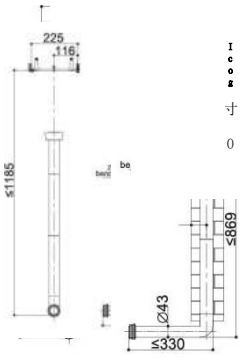


Features

- Seamless design of water tank without cover, easy to clean and dust-proof.
- Pioneering round design
- Scratch resistant tempered glass panel
- Patent cover opening by button on the side.
- Flushing volume: 7/4L · 6/3L


	LxWxH	Gross weight	Net weight
Master carton 3PCS	490x480x525mm	15.9kg	12.9kg
Inner Box	475x150x505mm	4.9kg	4.3kg

G210881

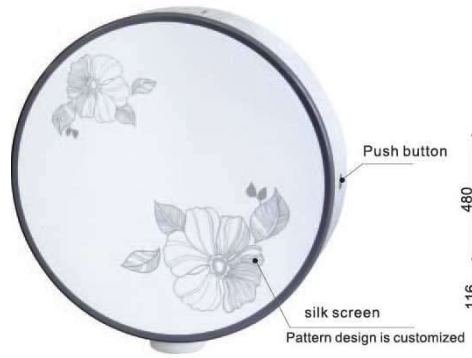

Push button

silk screen
Pattern design is customized



G210881



Half Flush Full Flush



G210880001 Dual Push Button



Push button

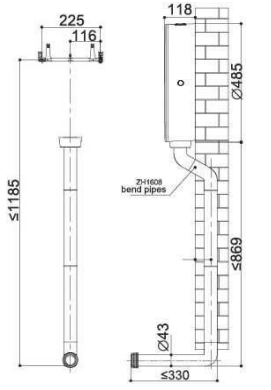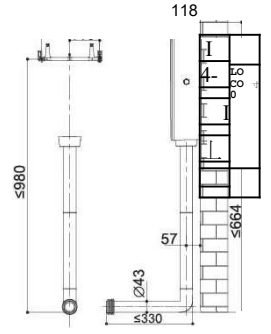

Features

- Seamless design of water tank without cover, easy to clean and dust-proof.
- Pioneering round design
- Tank panel with silk printing design
- Patent cover opening by button on the side.
- Flushing volume: 7/4Ls 6/3L

	LxWxH	Gross weight	Net weight
Master carton 3PCS	490x480x525mm	12.45kg	9.45kg
Inner Box	475x150x505mm	3.75kg	3.15kg


G21015

wels certification



Features

- Patent cover opening by button on the side.
- Patent dual button
- High and low water tank configuration optional
- Patent cover opening by button on the side.
- Flushing volume: 7/4L, 6/3L, 8/4.5L

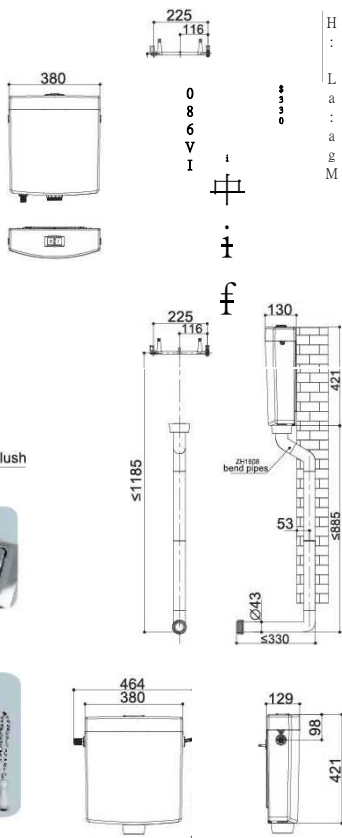


G21015



Bottom left inlet



Bottom right inlet



A362002 Dual Push Button



Left side inlet



Right side inlet



ZH63 Flapper single-flush cable (Optional)


	LxWxH	Gross weight	Net weight
Master carton 5PCS	750x420x500mm	16.0kg	14.5kg
Inner Box	400x145x480mm	2.9kg	2.5kg

G21035


wels certification

Features

- The design of three-dimensional form is more tough.
- Small and exquisite, suitable for many kinds of space.
- Patent appearance
- Patent opening structure
- Flushing volume: 7/4L, 6/3L

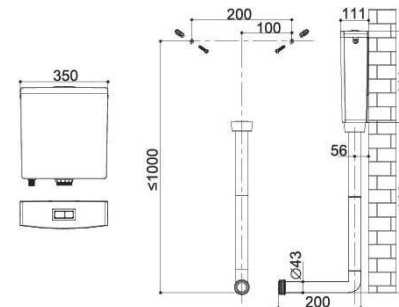

G21035



A3626 Dual Push Button




Patented lid-open structure



Bottom left inlet



Bottom right inlet

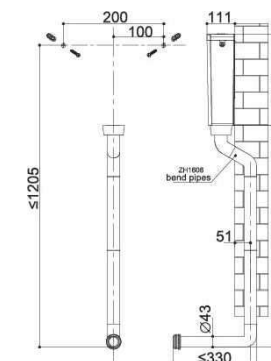


	LxWxH	Gross weight	Net weight
Master carton 5PCS	735x375x455mm	14.5kg	13.0kg
Inner Box	360x140x437mm	2.7kg	2.3kg

G21016



Features

- Classic "runway" contour, smooth and smooth lines, simple and beautiful.
- Patent appearance
- Flushing volume: 7/4L > 6/3L

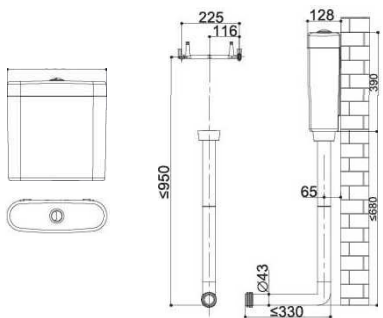


G21016

Half Flush Full Flush



A361012 Dual Push Button 048mm
Bottom left inlet Bottom right inlet

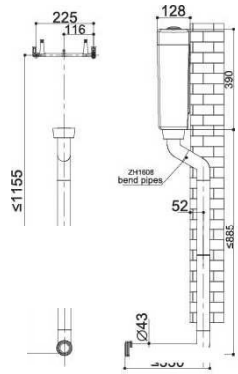


	LxWxH	Gross weight	Net weight
Master carton SPCS	740x410x470mm	15.0kg	13.5kg
Inner Box	395x140x450mm	2.7kg	2.3kg


G21017

Features


- Unique european design
- Installed inside cabinet or wall for space saving
- Flushing volume: 6/3L

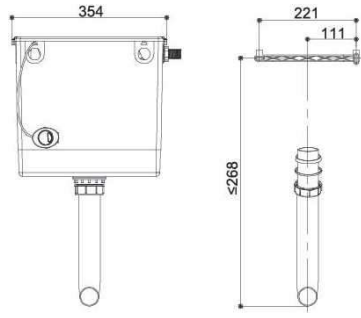

G21017

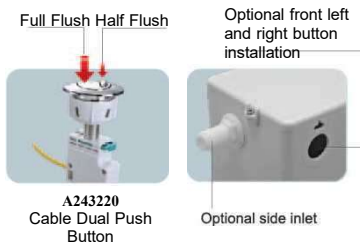

A243220 Cable Dual Push Button
Optional front left and right button installation
Optional side inlet

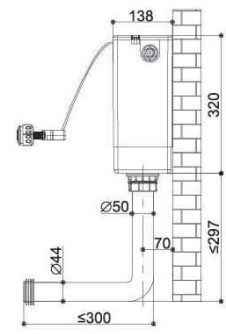


	LxWxH	Gross weight	Net weight
Master carton SPCS	760x410x395mm	14.5kg	13.0kg
Inner Box	395x145x373mm	2.6kg	2.2kg

G21038





Features

- The two sides arc surface shrinkage molding, heightening and widening design is more fashion
- Patent appearance
- Patent opening structure
- Tank flush volume: 8/4.5L、7/4L、6/3L

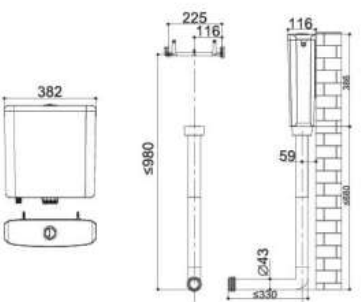

G21038

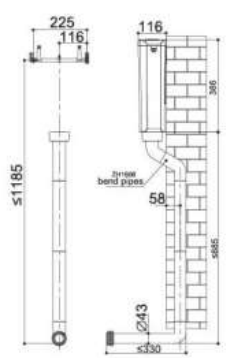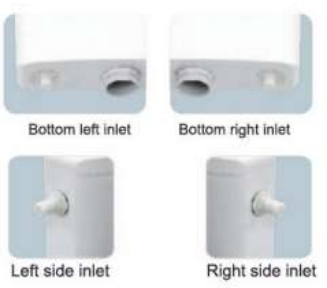


	LxWxH	Gross weight	Net weight
Master carton 5PCS	685x410x470mm	15.0kg	13.5kg
Inner Box	395x130x450mm	2.8kg	2.4kg

G21039




Features

- The rounded corners is exquisite and exquisite.
- Patent appearance
- Patent opening structure
- Flushing volume: 7/4L、6/3L

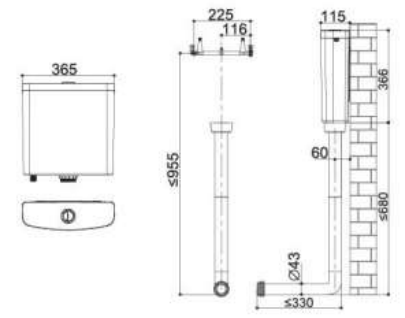

G21039

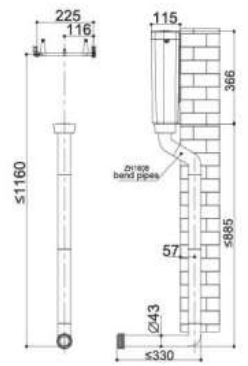


	LxWxH	Gross weight	Net weight
Master carton 5PCS	685x395x460mm	14.5kg	13.0kg
Inner Box	380x130x440mm	2.6Kg	2.2Kg

G21026



Features

- Characteristic C angle, elegant and generous.
- Patent appearance
- Flushing volume: 8/4.5L, 7/4L · 6/3L

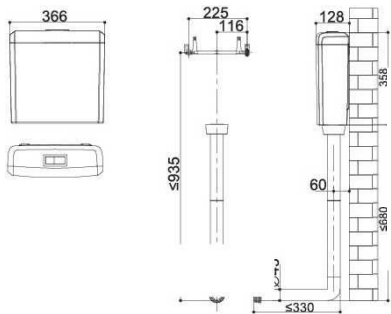


G21026

Full Flush Half Flush



A3626 Dual Push Button
Bottom left inlet
Bottom right inlet

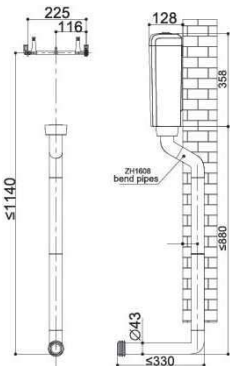


	LxWxH	Gross weight	Net weight
Master carton 5PCS	730x395x445mm	14.5kg	13.0kg
Inner Box	378x138x423mm	2.6kg	2.2kg

G21068

Features

- Small and exquisite
- Patent appearance
- Flushing volume: 7/4L > 6/3L

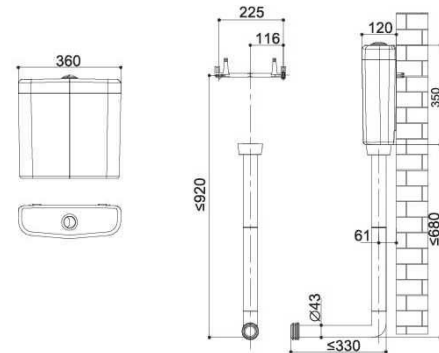


G21068

Full Flush Half Flush



A361012 Dual Push Button Ø 48mm
Bottom left inlet
Optional bottom right inlet

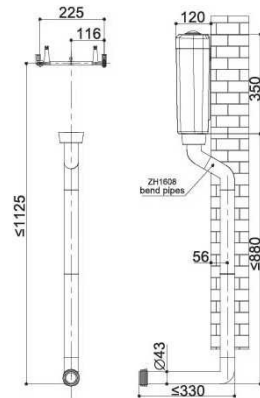

	LxWxH	Gross weight	Net weight
Master carton 5PCS	685x390x440mm	140kg	125kg
Inner Box	370x130x420mm	2-5kg	22kg

UF(urea)TOILET SEAT



- Environment friendly material.
- Lasting and chemical resistant
- Anti-static and dust-proof.
- Easy installation, cleaning and maintenance.
- Optional slow down,
- anti-UV
- anti-bacterial.



Quality testing for toilet seat



1. Life testing
60,000-100,000 cycle endurance



2. Static load testing
Endure 150kgs load



3. Sway testing
Resist 25000 cycles of 1335N loading



4. High and low temperature testing
High temperature: 70 C
Low temperature: minus 20 C



5. Damper intensity testing
Resist 10000 cycles



100% slow down time test at assembly

Urea Toilet Seats

- Urea Material
- Ceramic-like
- Shining Finish
- Color Anti-fading
- Anti-scratch



1. Ceramic-like surface finish 2. Anti-bacterial and anti-UV 3. Rigid surface anti-scratch protection


B6116 B6120

NEW!




B6116

■ Round ■ Slow down

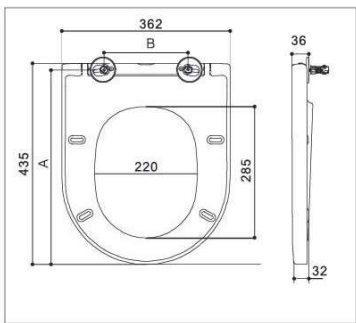

B6120

■ Square ■ Slow down

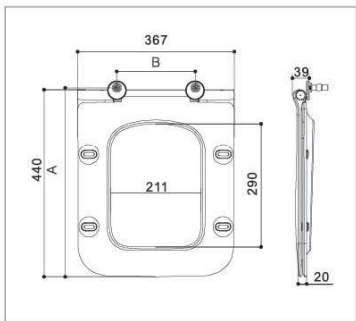

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6116		B020580	One-button locker	Available	398-448	100-200
		B020581	One-button locker	Available	388-458	80-220
B6120		B020604	One-button locker	Available	401-451	130-230

Unit: mm


B6126 B6127

NEW!




B6126

■ Round ■ Slow down

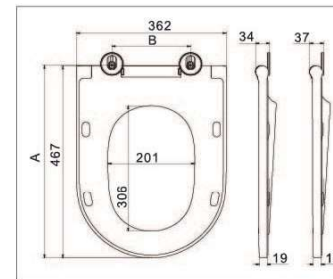

B6127

■ Round ■ Slow down

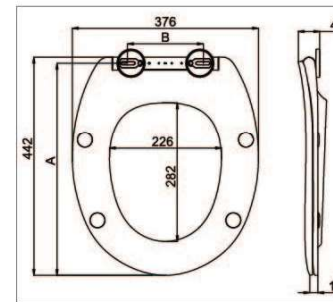

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6126		B020580	Top-mounted	Available	428-478	120-220
		B020581	Top-mounted	Available	418-488	110-240
		B020590	Top-mounted	Available	428-478	120-220
		B020591	Top-mounted	Available	418-488	110-240
B6127		B020611	Quick-release	Available	395-465	85-225
		B020591	Quick-release	Available	395-465	85-225


Unit: mm

B6103 B6105 **NEW!**




B6103

■ Round ■ Slow down

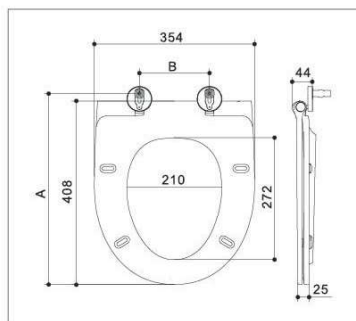

B6105

■ Round ■ Slow down

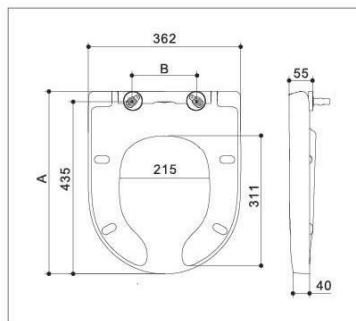

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6103		 B020420	Top-mounted	Available	370-420	105-205
		 B020421	Top-mounted	Available	360-430	85-225
B6105		 B020420	Top-mounted	Available	396-446	80-180
		 B020421	Top-mounted	Available	386-456	60-200


Unit: mm

B6107 B6108 **NEW!**




B6107

■ Round ■ Slow down

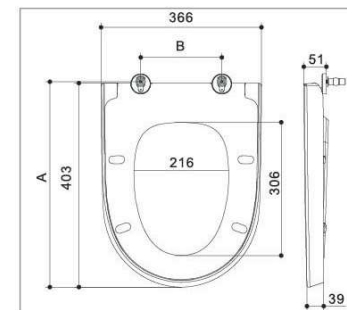

B6108

■ Round ■ Slow down

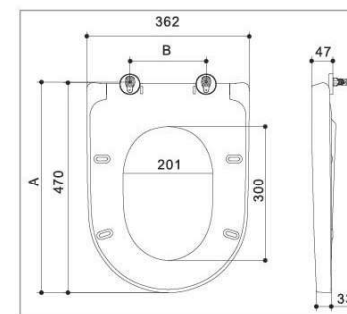

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6107		 B020332	Top-mounted	Available	428-478	135-235
		 B020371	Top-mounted	Available	418-488	115-255
B6108		 B020054	Top-mounted	Available	429-479	120-220
		 B020055	Top-mounted	Available	419-489	100-240

Unit: mm


B6111 B6112

NEW!




B6111

■ Slim ■ Round ■ Slow down

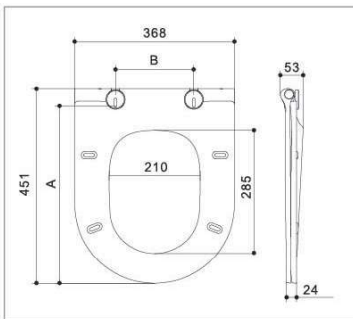

B6112

■ Slim ■ Round ■ Slow down

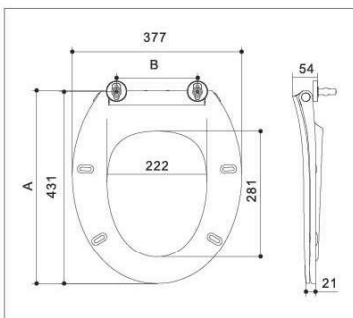


B6109 B6098

NEW!




B6109

■ Round ■ Slow down

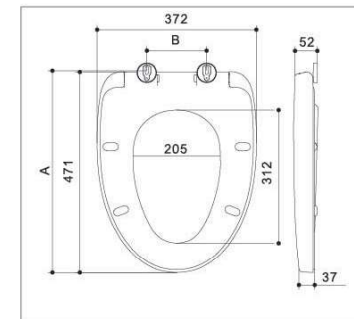

B6098

■ Slim ■ Round ■ Slow down

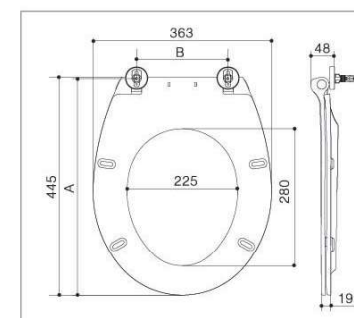

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6111		B020570	Top-mounted	Available	413-462	130-230
		B020575	Top-mounted	Available	403-472	110-250
		B0204831	Top-mounted	Available	413-462	130-230
		B020485	Top-mounted	Available	403-472	110-250
B6112		B020520	Top-mounted	Available	391-441	130-230
		B020521	Top-mounted	Available	381-451	110-250

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6109		B02050	Top-mounted	Available	431-481	90-190
		B02051	Top-mounted	Available	421-491	70-210
B6098		B02042	one-button locker	Available	405-455	136-236
		B020421	one-button locker	Available	395-465	116-256

Unit: mm


B6100 B6125

NEW!




B6100

■ Square ■ Slow down

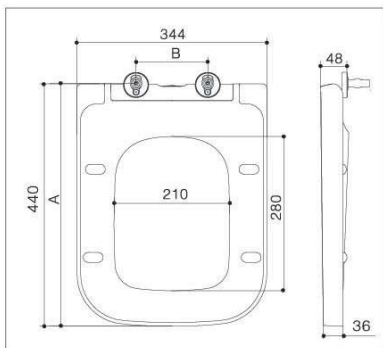

B6125

■ Round ■ Slow down

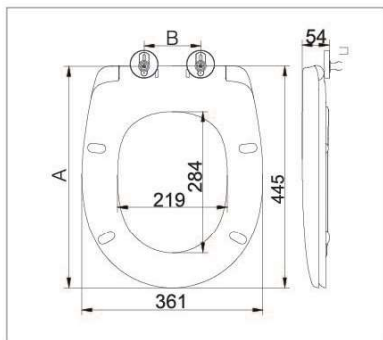

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6100	 B030101	 B02042	one-button locker	Available	400 - 450	80 - 180
		 B020421	one-button locker	Available	390 - 460	60 - 200
B6125	 B03052	 B020520	Top-mounted	Available	405 - 455	63 - 163
		 B020521	Top-mounted	Available	395 - 465	43 - 183

Unit: mm


B6101 B6102

NEW!




B6101



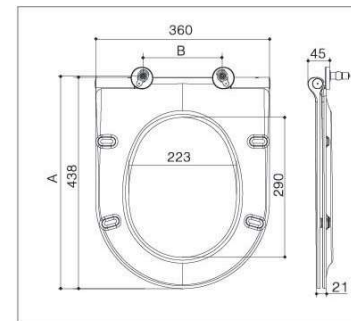



■ Slim ■ Round ■ Slow down

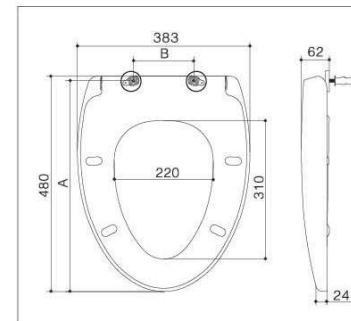

B6102

■ Round ■ Slow down



Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6101	 B03021	 B02042	one-button locker	Available	400 - 450	130 - 230
		 B020421	one-button locker	Available	390 - 460	110 - 250
B6102	 B03015	 B02005	Quick-release	Available	440 - 490	120 - 220
		 B020051	Quick-release	Available	430 - 500	100 - 240

Unit: mm


B6115 B6119

NEW!




B6115

■ Round ■ Slow down

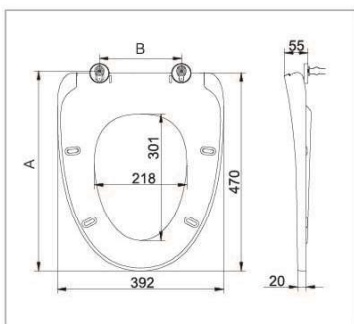

B6119

■ Round ■ Slow down

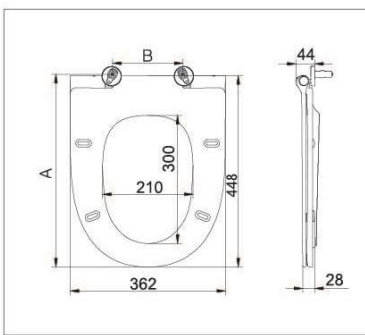


B6022 B6011




B6022

■ Round ■ Slow down

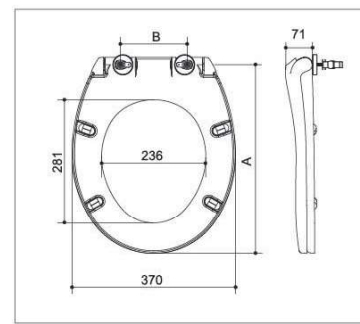





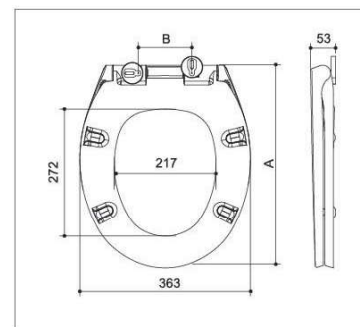

B6011

■ Round ■ Slow down



Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6115	 B03052	 B020520	Top-mounted	Available	430-480	144-244
		 B020521	Top-mounted	Available	420-490	124-264
B6119	 B03021	 B020420	Top-mounted	Available	410-460	130-230
		 B020421	Top-mounted	Available	400-470	110-250

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6022	 B03033	 B02033	Quick-release	Available	405-455	64-164
		 B02037	Quick-release	Available	395-465	44-184
B6011	 B03033	 B02033	Quick-release	Available	391-441	64-164
		 B02037	Quick-release	Available	381-451	44-184


Unit: mm

B6027 B6048




B6027

■ Square ■ Slow down

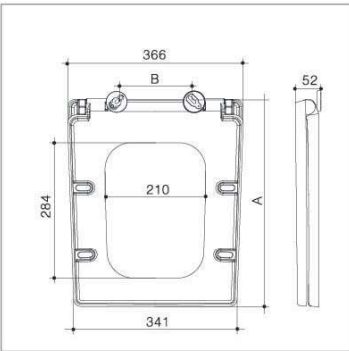

B6048

■ Round ■ Slow down

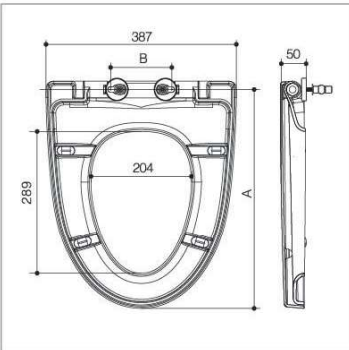

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6027		B02033	Quick-release	Available	395-445	130-230
		B02037	Quick-release	Available	385-455	110-250
B6048		B02033	Quick-release	Available	420-470	74-174
		B02037	Quick-release	Available	410-480	54-194


Unit: mm

B6038 B6041




B6038

■ Round ■ Slow down

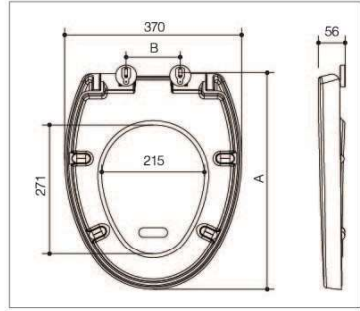

B6041

■ Round ■ Slow down

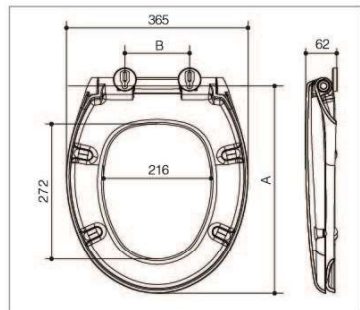

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6038		B02033	Quick-release	Available	410-460	63-163
		B02037	Quick-release	Available	400-470	43-183
B6041		B02033	Quick-release	Available	392-442	80-180
		B02037	Quick-release	Available	382-452	60-200


Unit: mm

B6042



B6042

■ Round ■ Slow down

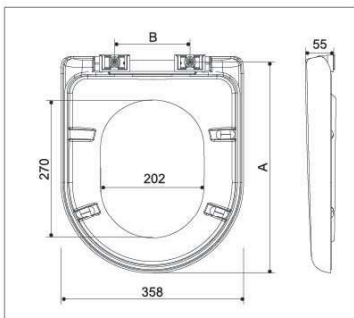

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6042	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	423 ± 12	160 ± 26
		B02022	Top-mounted	Available	414 ± 5	148 ± 26
		B02028	Top-mounted	Available	446 ± 5	145 ± 10
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	446 ± 5	145 ± 10
		L=60mm B02013 (without caps), L=60mm B02011 (without caps), L=60mm B02014 (without caps), L=60mm B02012 (without caps)	Bottom-mounted	Available	446 ± 5	145 ± 10
	B03007 Hinge set PB6021003	B02032	Top-mounted	Available	438 ± 14	143 ± 18
	B03005 Hinge set PB1028003		Top-mounted	Available	429 ± 14	140 ± 21
	B03008 Hinge set PB0204101		one-button locker	Available	431 ± 14	140 ± 21
	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	416 ± 10	145 ± 15
	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	380-430	102-202
Top-mounted			Available	396-446	102-202	
B02038		Quick-release	Available	370-440	82-222	
		Quick-release	Available	386-456	82-222	


Unit: mm

B6045 B6053




B6045

■ Round ■ Slow down

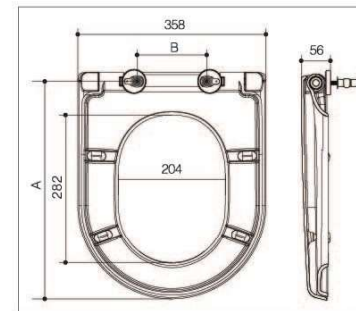

B6053

■ Square ■ Slow down

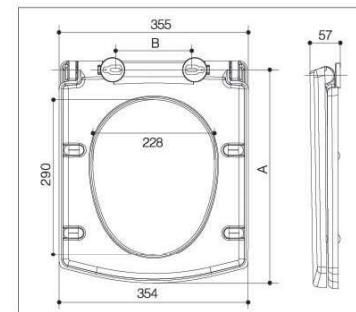

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6045	B03033	B02033	Quick-release	Available	390-440	120-220
		B02037	Quick-release	Available	380-450	100-240
B6053	B03033	B02033	Quick-release	Available	375-425	130-230
		B02037	Quick-release	Available	365-435	110-250


Unit: mm

B6055 B6056




B6055



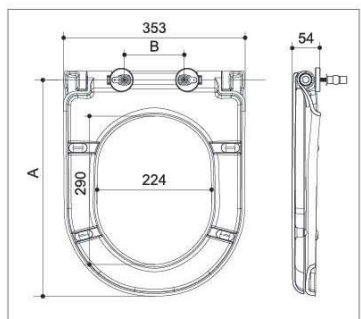

■ Round ■ Slow down

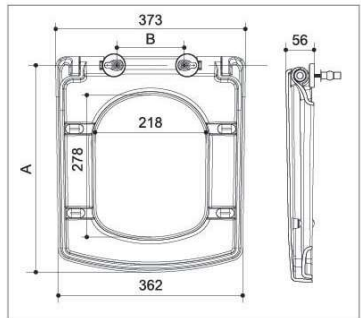

B6056

■ Elongated Round ■ Slow down



Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6055	 B03033	 B02033	Quick-release	Available	397-447	104-204
		 B02037	Quick-release	Available	387-457	84-204
B6056	 B03033	 B02033	Quick-release	Available	382-432	120-220
		 B02037	Quick-release	Available	372-442	100-240


Unit: mm

B6015 B6016 B6018




B6015

■ Round ■ Slow down
Disable Seat

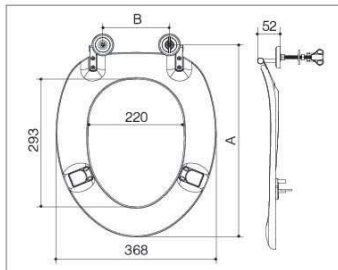


B6016



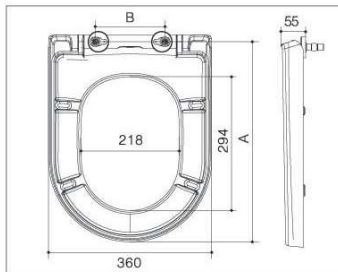






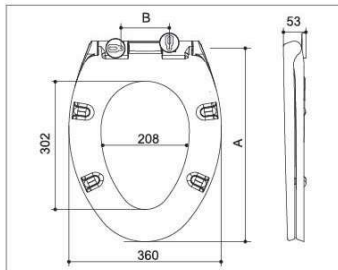

■ Elongated Round ■ Slow down



B6017/B6018

■ Elongated Round ■ Slow down
B6018 with bigger arc angle than B6017



Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6015	 B02042	 B02016	Bottom-mounted	Available	441 ± 12	153 ± 24
		 B02042	one-button locker	Available	440 ± 12	64 - 90
B6016	 PB0204001	 B02042	one-button locker	Available	415 - 428	114 ± 24
		 B020421	one-button locker	Available	452 - 465	114 ± 24
		 B020421	one-button locker	Available	440 ± 12	44 - 90
		 B020421	one-button locker	Available	440 ± 12	138 - 184
		 B020421	one-button locker	Available	405 - 428	114 ± 24
B6017 B6018	 B02037	 B02033	Quick-release	Available	452 - 475	114 ± 24
		 B02033	Quick-release	Available	457 ± 12	64 - 90
		 B02033	Quick-release	Available	457 ± 12	138 - 164
		 B02033	Quick-release	Available	432 - 445	114 ± 24
		 B02033	Quick-release	Available	469 - 482	114 ± 24
		B02037	Quick-release	Available	457 ± 12	44 - 90
B02037	Quick-release	Available	457 ± 12	138 - 184		
B02037	Quick-release	Available	422 - 445	114 ± 24		
B02037	Quick-release	Available	469 - 492	114 ± 24		


Unit: mm

B6060 B6061




B6060

■ Square ■ Slow down

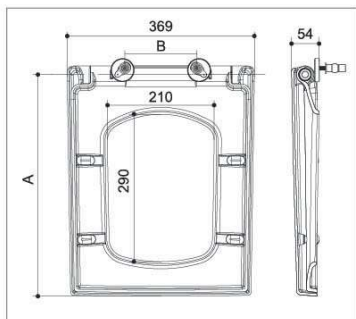

B6061

■ Round ■ Slow down

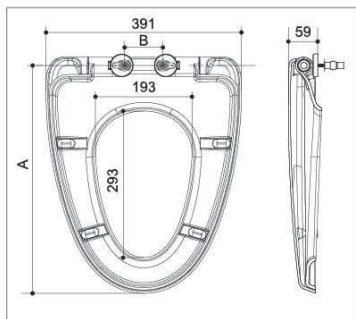

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6060	 B03033	 B02033	Quick-release	Available	411-461	120-220
		 B02037	Quick-release	Available	471-490	100-240
B6061	 B03033	 B02033	Quick-release	Available	430-480	64-164
		 B02037	Quick-release	Available	420-490	44-184


Unit: mm

B6064 B6065




B6064

■ Square ■ Slow down

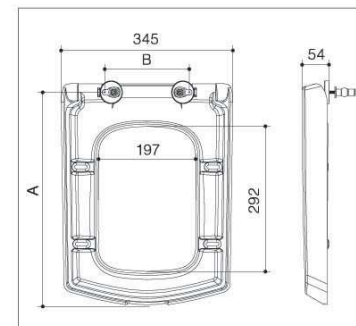

B6065

■ Square ■ Slow down

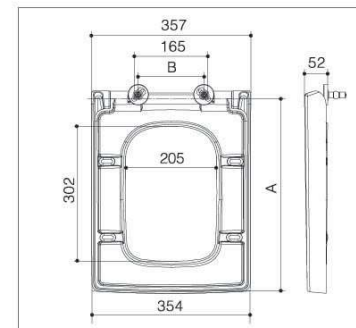

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6064	 B03033	 B02033	Quick-release	Available	405-455	120-220
		 B02037	Quick-release	Available	395-465	100-240
B6065	 B03033	 B02033	Quick-release	Available	410-460	115-215
		 B02037	Quick-release	Available	400-470	95-235


Unit: mm

B6066 B6067




B6066



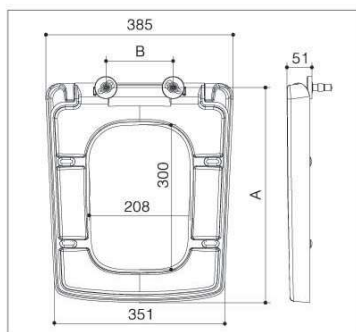



■ Square ■ Slow down

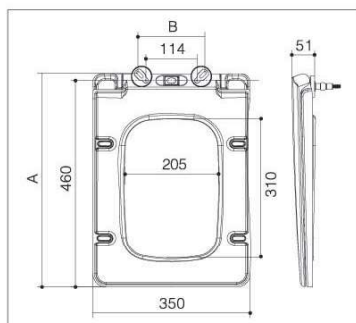

B6067

■ Square ■ Slow down



Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6066	 B03033	 B02033	Quick-release	Available	412-462	110-210
		 B02037	Quick-release	Available	402-472	90-230
B6067	 B03032	 B02042	one-button locker	Available	435-485	64-164
		 B020421	one-button locker	Available	425-495	44-184


Unit: mm

B6071 B6073




B6071

■ Round ■ Slow down

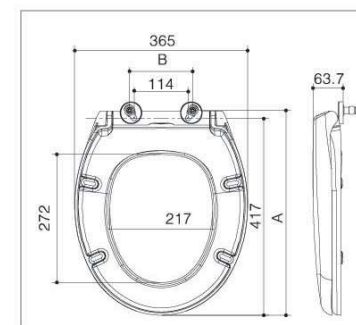

B6073

■ Square ■ Slow down

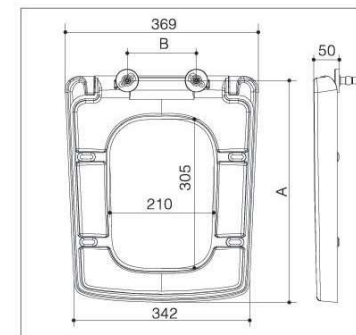

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6071	 B03010	 B02042	Quick-release	Available	392-442	64-164
		 B020421	Quick-release	Available	382-452	44-184
B6073	 B03015	 B02005	one-button locker	Available	403-453	130-230
		 B020051	one-button locker	Available	393-463	110-250


Unit: mm

B6074 B6075




B6074

■ Elongated Round ■ Slow down

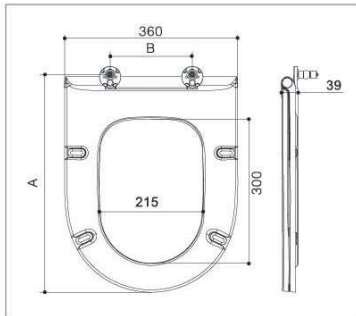

B6075

■ Round ■ Slow down

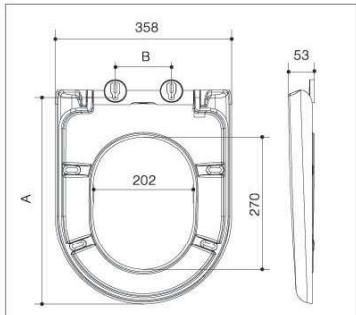


B6076 B6082




B6076

■ Round ■ Slow down

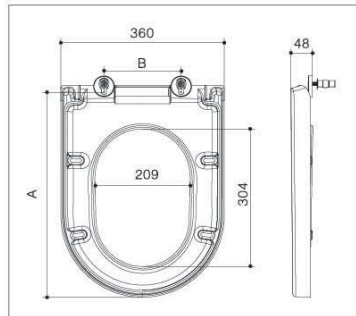

B6082

■ Elongated Square ■ Slow down

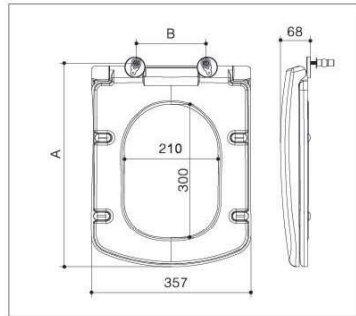

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6074		B02048	Top-mounted	Available	410-460	120-220
		B02048	Top-mounted	Available	400-470	100-240
B6075		B02042	one-button locker	Available	395-445	64-164
		B020421	one-button locker	Available	385-455	44-184

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6076		B02005	Quick-release	Available	428-478	120-220
		B020051	Quick-release	Available	418-488	100-240
B6082		B02005	Quick-release	Available	410-460	120-220
		B020051	Quick-release	Available	400-470	100-240


Unit: mm

B6088 B6089




B6088

■ Round ■ Slow down

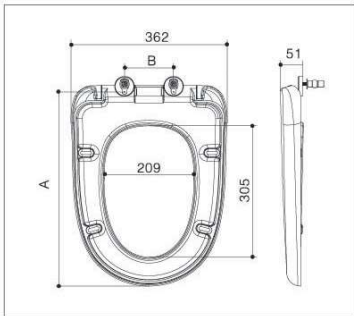

B6089

■ Elongated Square ■ Slow down

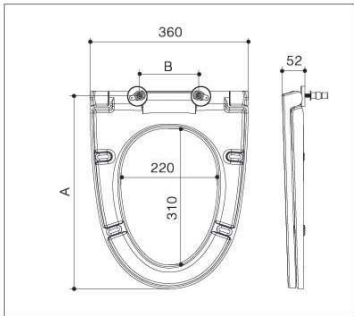

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6088		B02005	Quick-release	Available	425-475	64-164
		B020051	Quick-release	Available	415-485	44-184
B6089		B02005	Quick-release	Available	410-460	120-220
		B020051	Quick-release	Available	400-470	100-240


Unit: mm

B6059 B6090




B6059

■ Round ■ Slow down

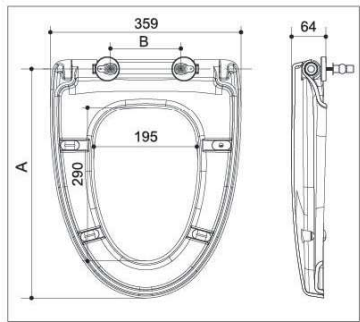

B6090

■ Elongated Round ■ Slow down

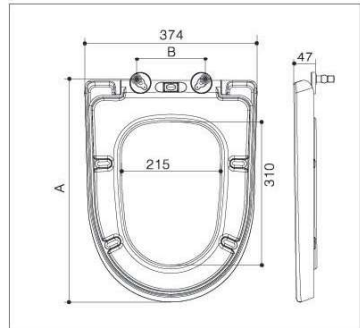

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B6059		B02033	Quick-release	Available	407-457	120-220
		B02037	Quick-release	Available	397-467	100-240
B6090		B02042	one-button locker	Available	430-480	64-164
		B020421	one-button locker	Available	420-490	44-184

Unit: mm

PP TOILET SEAT




B1108 B1121

NEW!




B1108

■ Round ■ Slow down

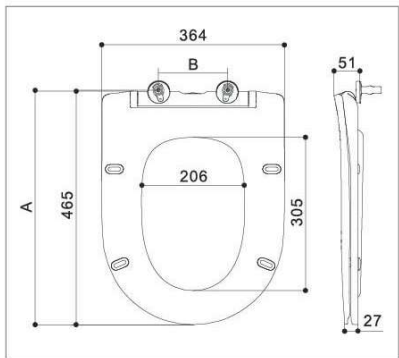

B1121

■ Round ■ Slow down

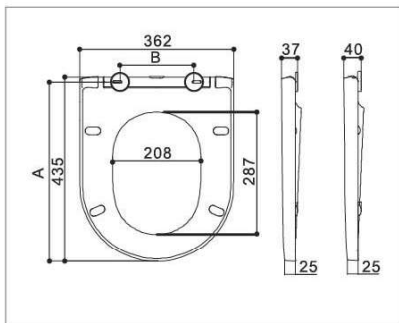

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1108	 B030101	 B020520	one-button locker	Available	425-475	80-180
		 B020521	one-button locker	Available	415-485	60-200
B1121	 B03019	 B020580	Top-mounted	Available	398-448	100-200
		 B020581	Top-mounted	Available	388-458	80-220

Unit: mm


B1113 B1116

NEW!




B1113


■ Square ■ Slow down

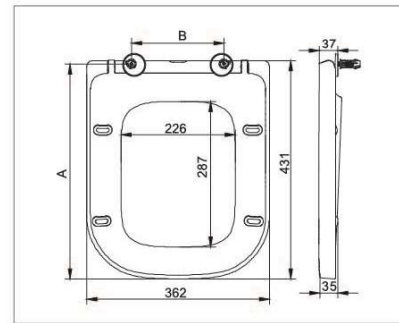

B1116

■ Round ■ Slow down

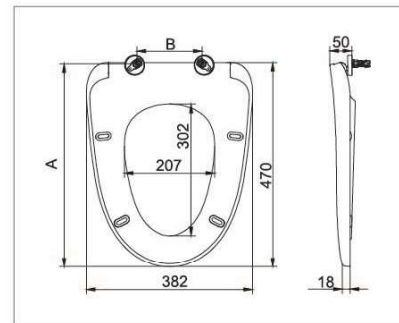

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1113	 B03019	 B020580	Top-mounted	Available	394-444	100-200
		 B020581	Top-mounted	Available	384-454	80-220
		 B020590	Top-mounted	Available	394-444	100-200
		 B020591	Top-mounted	Available	384-454	80-220
B1116	 B03052	 B020520	Top-mounted	Available	431-481	130-230
		 B020521	Top-mounted	Available	421-491	110-250

Unit: mm


B1118 B1119

NEW!




B1118

■ Round ■ Slow down

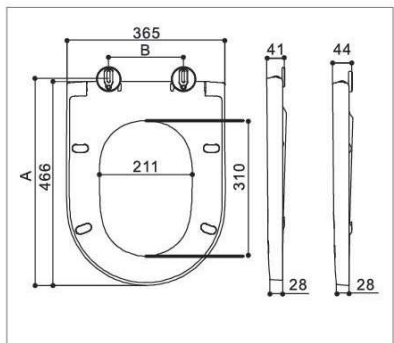

B1119

■ Round ■ Slow down

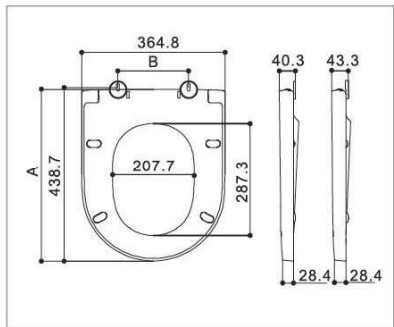

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1118		B020580	Top-mounted	Available	428-478	120-220
		B020581	Top-mounted	Available	418-488	100-240
B1119		B020580	Top-mounted	Available	400-450	130-230
		B020581	Top-mounted	Available	390-460	110-250
		B020590	Top-mounted	Available	400-450	130-230
		B020591	Top-mounted	Available	390-460	110-250

Unit: mm


B1105 B1107

NEW!




B1105

■ Round ■ Slow down

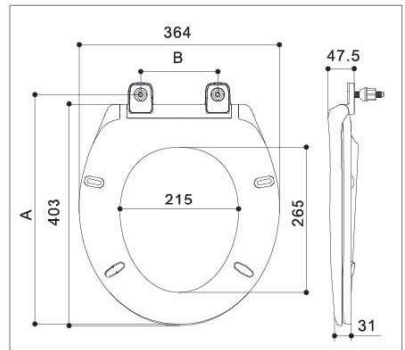

B1107

■ Round ■ Slow down

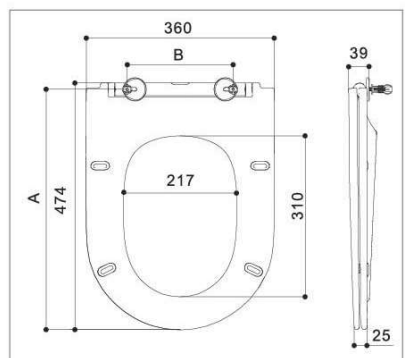

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1105		B020250	Top-mounted	Available	414-424	130-150
		B02013 B02011 B02014 B02012 (without cap)	Bottom-mounted	Available	414-424	130-150
B1107		B020580	Top-mounted	Available	437-487	100-200
		B020581	Top-mounted	Available	427-497	80-220

Unit: mm


B1093 B1094

NEW!




B1093

■ Elongated Round ■ Slow down

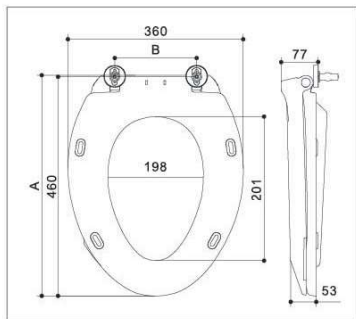

B1094

■ Elongated Round ■ Slow down

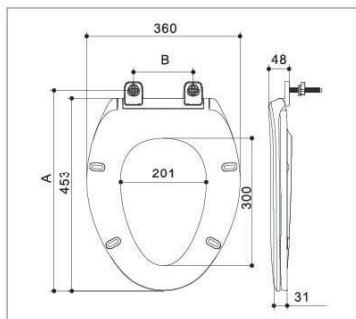

Item	Bolts available	Installation method	Slow down	A	B
B1093	B020420	Quick-release	Available	420-470	120-220
	B020421	Quick-release	Available	410-480	100-240
B1094	B020250	Top-mounted	Available	465-475	130-150
	L=60mm B02013, L=40mm B02011, L=60mm B02014, L=40mm B02012 (without cap)	Bottom-mounted	Available	465-475	130-150

Unit: mm


B1095 B1096 B1097

NEW!




B1095

■ Round ■ Slow down




B1096

■ Round ■ Slow down



B1097

■ Elongated Round ■ Slow down



Item	Hinges available	Bolts available	Installation method	Slow down	A		B	
					B1095	B1097	B1095	B1097
B1095		B020250	Top-mounted	Available	415-425	462-472	130-150	130-150
B1097		L=60mm B02013, L=40mm B02011, L=60mm B02014, L=40mm B02012 (without cap)	Bottom-mounted	Available	415-425	462-472	130-150	130-150
B1096		B02040	Bottom-mounted	Available	418-420		138-142	

Unit: mm


B1098 B1099

NEW!




B1098

■ Elongated Round ■ Slow down

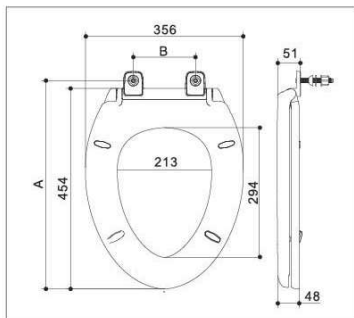

B1099

■ Round ■ Slow down

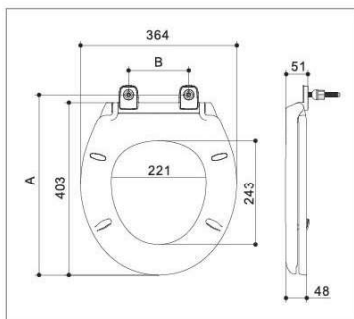

Item	Bolts available	Installation method	Slow down	A		B	
				B1098	B1099	B1098	B1099
B1098	B020250	Top-mounted	Available	467-477	415-425	130-150	130-150
B1099	L=60mm L=80mm B02013 B02011 (without cap) L=60mm L=80mm B02014 B02012 (without cap)	Bottom-mounted	Available	467-477	415-425	130-150	130-150

Unit: mm


B1100 B1101

NEW!




B1100

■ Square ■ Slow down

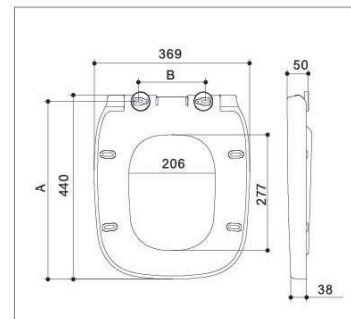

B1101

■ Round ■ Slow down

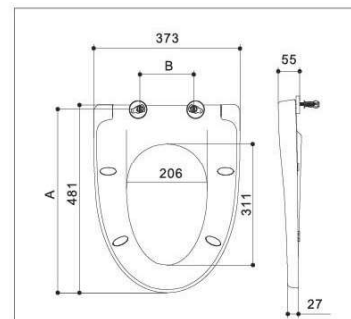


Item	Hinges available	Bolts available	Installation method	Slow down	A	B
					400-450	73-173
B1100		B020050	Quick-release	Available	400-450	73-173
		B020051	Quick-release	Available	390-460	53-193
B1101		B020332	Quick-release	Available	441-492	121-223
		B020371	Quick-release	Available	431-501	112-232

Unit: mm

B1103

NEW!

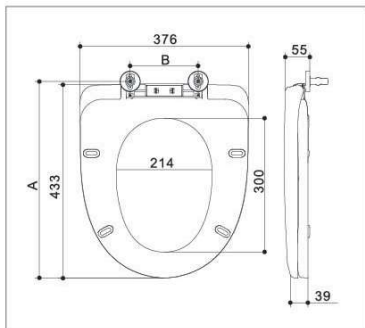

B1103

■ Round ■ Slow down

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1103	B03002-Hinge set PB60040051	B02017	Bottom-mounted	Available	423-451	119-161
	B03003-Hinge set PB1023003	B02025	Top-mounted	Available	447-457	135-155
		L=60mm B02013 L=80mm B02011 L=60mm B02014 L=60mm B02012 (without cap)	Bottom-mounted			
	B03007-Hinge set PB6021003	B02032	Quick-release	Available	430-458	125-161
	B03005-Hinge set PB1028003		one-button locker	Available	421-449	120-160
	B03006-Hinge set PB0204101		Quick-release	Available	423-451	120-160
	B03004-Hinge set PB1020006	B02034	Quick-release	Available	412-432	130-160
	B03008-Hinge set PB0203601	B02036	Top-mounted	Available	386-436	102-202
Top-mounted			Available	402-452	102-202	
B02038		Quick-release	Available	376-446	82-222	
		Quick-release	Available	392-462	82-222	

Unit: mm


B1102 B1104

NEW!




B1102

■ Round ■ Slow down

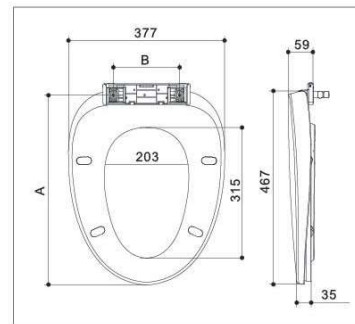

B1104

■ Round ■ Slow down

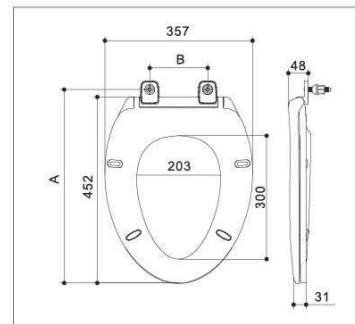

Item	Bolts available	Installation method	Slow down	A	B
B1102	B02034+	Quick-release	Available	440-460	130-166
	B03017				
B1104	B020250	Top-mounted	Available	465-475	130-150
	L=60mm B02013 L=80mm B02011 L=60mm B02014 L=60mm B02012 (without cap)	Bottom-mounted	Available	465-475	130-150

Unit: mm


B1111 B1112

NEW!




B1111

■ Round ■ Slow down

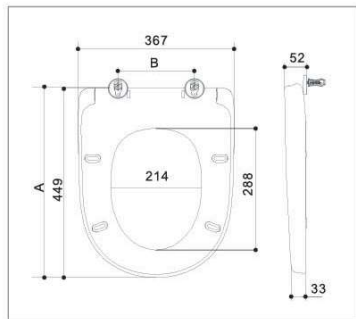

B1112

■ Round ■ Slow down

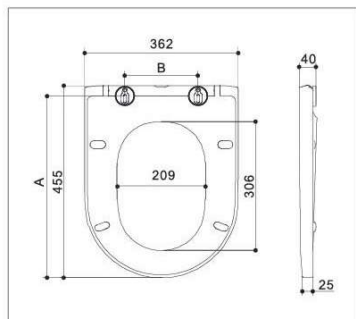

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1111		B020050	Top-mounted	Available	409-459	130-230
		B020051	Top-mounted	Available	399-469	110-250
B1112		B020590	Top-mounted	Available	418-468	100-200
		B020591	Top-mounted	Available	408-478	80-220
		B020580	Top-mounted	Available	418-468	100-200
		B020581	Top-mounted	Available	408-478	80-220


Unit: mm

B1092 B1087




B1092

■ Oval ■ Slow down

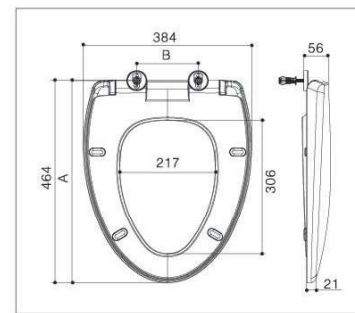

B1087

■ Round ■ Slow down

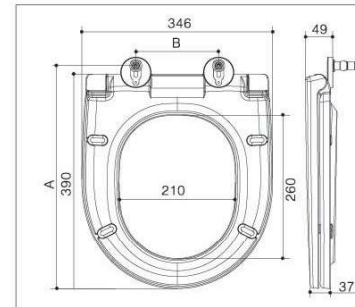

Item	Bolts available	Installation method	Slow down	A	B
B1092	Lift-off bolts B02052	Quick-release	Available	425 - 475	90 - 190
	B020521	Quick-release	Available	415 - 485	70 - 210
B1087	B02005	Quick-release	Available	350 - 400	1 00200
	B020051	Quick-release	Available	340 - 410	80 - 220


Unit: mm

B1003 B1006




B1003

■ Elongated Round ■ Slow down

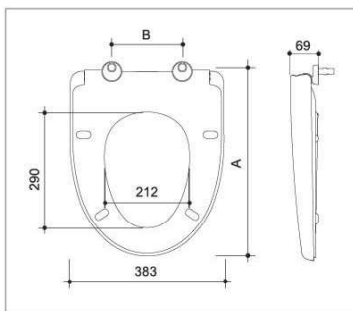

B1006

■ Elongated Round ■ Slow down

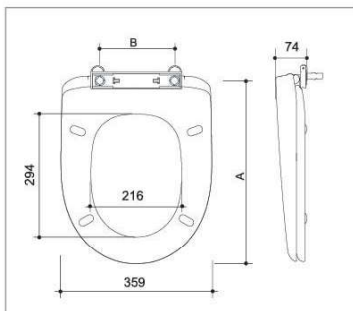

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1003		B02003	Top-mounted	Available	470	175
			Bottom-mounted	Available	448 ± 15	125 - 145
		B02031	Top-mounted	Available	448 ± 15	205 - 225
			Bottom-mounted	Available	423 - 433	175 ± 15
B1006	B03012 Hinge set PB1010003	B02010	Top-mounted	Available	468 ± 5	145 ± 10
			Bottom-mounted	Available	468 ± 5	145 ± 10
	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	444 ± 12	160 ± 26
			Top-mounted	Available	438 ± 10	145 ± 15
	B03004 Hinge set PB1020003	B02034	Top-mounted	Available	438 ± 10	145 ± 15
			Bottom-mounted	Available	444 ± 5	189 ± 38
B03009 Hinge set PB1040003	B02027	Top-mounted	Available	444 ± 5	189 ± 38	


Unit: mm

B1007 B1009




B1007

■ Round ■ Slow down

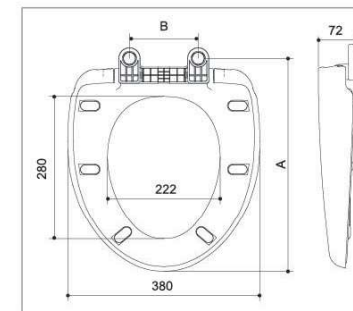

B1009

■ Elongated Round ■ Slow down

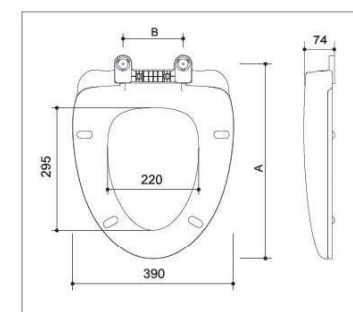

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1007	PB1007003	B02010 L=60mm B02013 L=60mm B02011 L=60mm B02014 L=60mm B02012	Top-mounted	Available	420 ± 5	135 ± 10
			Bottom-mounted	Available	420 ± 5	135 ± 10
B1009	B03013 Hinge set PB10090031	B02010 L=60mm B02013 L=60mm B02011 L=60mm B02014 L=60mm B02012	Top-mounted	Available	470 ± 5	145 ± 10
			Bottom-mounted	Available	470 ± 5	145 ± 10
	B03014 Hinge set PB1012004	B02017	Bottom-mounted	Available	449 ± 12	147 ± 16


Unit: mm

B1010 B1012




B1010

■ Round ■ Slow down

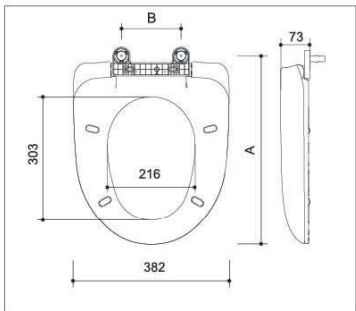

B1012

■ Elongated Round ■ Slow down

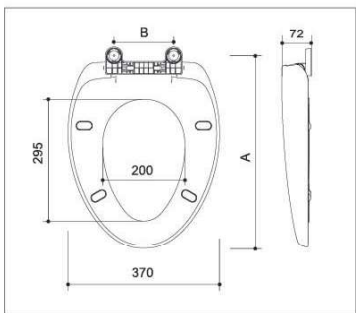


B1013 B1014




B1013

■ Elongated Round ■ Slow down

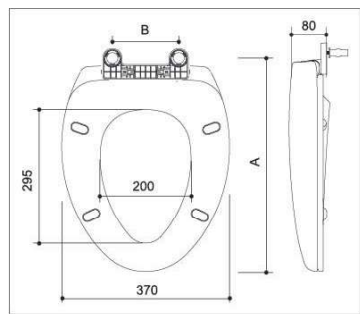

B1014

■ Round ■ Slow down

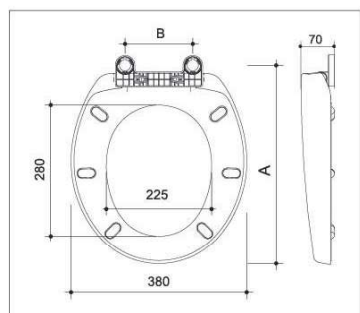

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1010	B03012 Hinge set PB1010003	B02010	Top-mounted	Available	465 ± 5	145 ± 10
		L=60mm B02013, L=60mm B02011, L=60mm B02014, L=80mm B02012	Bottom-mounted			
B1012	B03013 Hinge set PB10090031	B02010	Top-mounted	Available	470 ± 5	145 ± 10
		L=60mm B02013, L=60mm B02011, L=60mm B02014, L=80mm B02012	Bottom-mounted			
	B03014 Hinge set PB1012004	B02017	Bottom-mounted	Available	447 ± 12	147 ± 16

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1013	B1014	
B1013	B03013 Hinge set PB10090031	B02010	Top-mounted	Available	470 ± 5	425 ± 5	145 ± 10
		L=60mm B02013, L=60mm B02011, L=60mm B02014, L=80mm B02012	Bottom-mounted				
B1014	B03014 Hinge set PB1012004	B02017	Bottom-mounted	Available	447 ± 12	404 ± 12	147 ± 16


Unit: mm

B1015 B1018




B1015

■ Elongated Round ■ Slow down

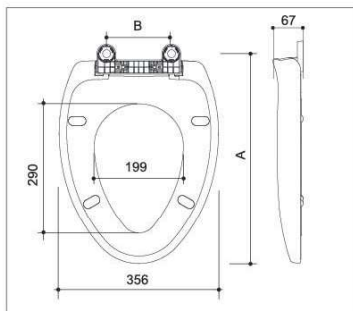

B1018

■ Elongated Round ■ Slow down

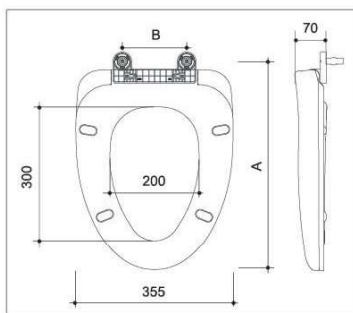

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1015	B03013 Hinge set PB10090031	 B02010 L=60mm L=80mm L=60mm L=80mm B02013 B02011 B02014 B02012	Top-mounted	Available	470 ± 5	145 ± 10
			Bottom-mounted			
	B03014 Hinge set PB1012004	 B02017	Bottom-mounted	Available	449 ± 12	147 ± 16
B1018	B03012 Hinge set PB1010003	 B02010 L=60mm L=80mm L=60mm L=80mm B02013 B02011 B02014 B02012	Top-mounted	Available	470 ± 5	145 ± 10
			Bottom-mounted			


Unit: mm

B1017 B1020




B1017

■ Round ■ Slow down

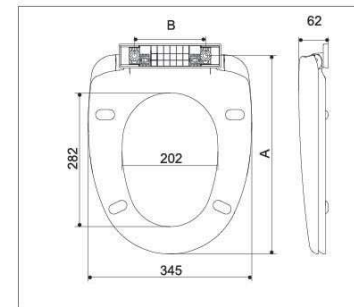

B1020

■ Square ■ Slow down

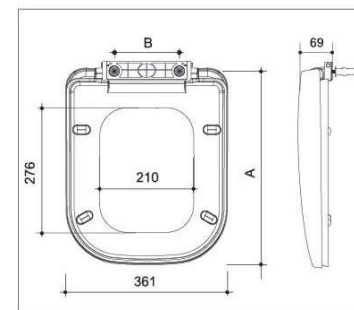

Item	Hinges available	Bolts available	Installation method	Slow down	A		
					B1017	B1020	B
B1017	 B03002 Hinge set PB60040051	 B02017 B02025	Bottom-mounted	Available	418 ± 12	435 ± 12	160 ± 26
			Top-mounted	Available	441 ± 5	458 ± 5	145 ± 10
	 B03003 Hinge set PB1023003	 L=60mm B02013 L=80mm B02011 L=60mm B02014 L=80mm B02012 (without cap) L=60mm B02014 L=80mm B02012 (without cap)	Bottom-mounted	Available	433 ± 14	450 ± 14	143 ± 18
			Top-mounted	Available	424 ± 14	441 ± 14	140 ± 21
	 B03005 Hinge set PB1028003 B03006 Hinge set PB0204101	 B02032	one-button locker	Available	426 ± 14	443 ± 14	140 ± 21
			Top-mounted	Available	411 ± 10	428 ± 10	145 ± 15
B1020	 B03004 Hinge set PB1020006	 B02034	Top-mounted	Available	400 ± 12	417 ± 12	102 - 128
			Top-mounted	Available	400 ± 12	417 ± 12	176 - 202
	 B03008 Hinge set PB0203601	 B02036	Top-mounted	Available	375 - 388	392 - 405	152 ± 24
			Top-mounted	Available	412 - 425	429 - 442	152 ± 24
	 B03008 Hinge set PB0203601	 B02038	Top-mounted	Available	416 ± 12	433 ± 12	102 - 128
				Available	416 ± 12	433 ± 12	176 - 202
			Quick-release	Available	391 - 404	408 - 421	152 ± 24
				Available	428 - 441	445 - 458	152 ± 24
			Quick-release	Available	400 ± 12	417 ± 12	82 - 128
				Available	400 ± 12	417 ± 12	176 - 222


Unit: mm

B1021 B1023




B1021

■ Round ■ Slow down

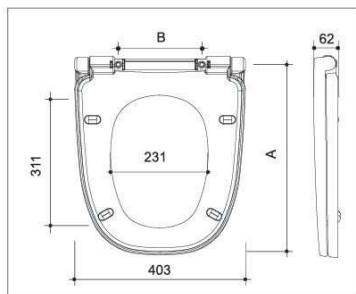

B1023

■ Round ■ Slow down

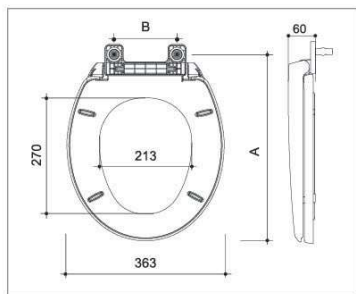

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
B1021			Top-mounted	Available	450 ± 25	198 ± 50	
			Bottom-mounted	Available	407 ± 12	160 ± 26	
B1023			Top-mounted	Available	430 ± 5	145 ± 10	
			Bottom-mounted	Available	430 ± 5	145 ± 10	
			Top-mounted	Available	422 ± 14	143 ± 18	
			one-button locker	Available	413 ± 14	140 ± 21	
			Top-mounted	Available	415 ± 14	140 ± 21	
			Top-mounted	Available	400 ± 10	145 ± 15	
			Top-mounted	Available	389 ± 12	102 - 128	
			Top-mounted	Available	389 ± 12	176 - 202	
			Top-mounted	Available	364 - 377	152 ± 24	
			Top-mounted	Available	401 - 414	152 ± 24	
		Top-mounted	Available	405 ± 12	102 - 128		
		Top-mounted	Available	405 ± 12	176 - 202		
		Quick-release	Available	380 - 393	152 ± 24		
		Quick-release	Available	417 - 430	152 ± 24		


Unit: mm

B1025 B1026




B1025

■ Round ■ Slow down

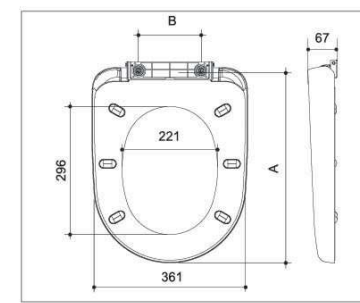

B1026

■ Round ■ Slow down

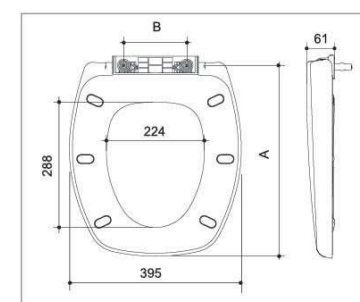

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1025	B1026	
B1025			Bottom-mounted	Available	449 ± 12	443 ± 12	160 ± 26
			Top-mounted	Available	449 ± 12	443 ± 12	160 ± 26
B1026			Bottom-mounted	Available	472 ± 5	466 ± 5	145 ± 10
			Top-mounted	Available	472 ± 5	466 ± 5	145 ± 10
B1025			Top-mounted	Available	464 ± 14	458 ± 14	143 ± 18
			Top-mounted	Available	455 ± 14	449 ± 14	140 ± 21
B1026			Top-mounted	Available	457 ± 14	451 ± 14	140 ± 21
			one-button locker	Available	442 ± 10	436 ± 10	145 ± 15
B1025			Top-mounted	Available	431 ± 12	425 ± 12	102 - 128
			Top-mounted	Available	431 ± 12	425 ± 12	176 - 202
			Top-mounted	Available	406 - 419	400 - 413	152 ± 24
			Top-mounted	Available	443 - 456	437 - 450	152 ± 24
			Top-mounted	Available	447 ± 12	441 ± 12	102 - 128
			Top-mounted	Available	447 ± 12	441 ± 12	176 - 202
			Top-mounted	Available	422 - 435	416 - 429	152 ± 24
			Top-mounted	Available	459 - 472	453 - 466	152 ± 24
			Quick-release	Available	431 ± 12	425 ± 12	82 - 128
			Quick-release	Available	431 ± 12	425 ± 12	176 - 222

Unit: mm


PP TOILET SEAT

B1028 B1029




B1028

■ Elongated Round ■ Slow down

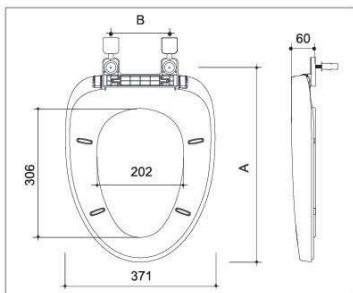

B1029

■ Round ■ Slow down

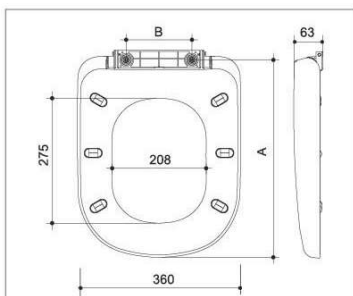

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1028	B1029	
B1028	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	460 ± 12	440 ± 12	160 ± 26
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	483 ± 5	463 ± 5	145 ± 10
		L=60mm B02013 (without cap) L=80mm B02011 L=60mm B02014 (without cap) L=80mm B02012 (without cap)	Bottom-mounted				
	B03007 Hinge set PB6021003	B02032	Top-mounted	Available	475 ± 14	455 ± 14	143 ± 18
	B03005 Hinge set PB1028003		Top-mounted	Available	466 ± 14	446 ± 14	140 ± 21
B03006 Hinge set PB0204101	one-button locker		Available	468 ± 14	448 ± 14	140 ± 21	
B1029	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	453 ± 10	433 ± 10	145 ± 15
	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	442 ± 12	422 ± 12	102 - 128
					442 ± 12	422 ± 12	176 - 202
					417 - 430	397 - 410	152 ± 24
			454 - 467		434 - 447	152 ± 24	
			458 ± 12		438 ± 12	102 - 128	
			458 ± 12		438 ± 12	176 - 202	
	B03008 Hinge set PB0203601	B02038	Top-mounted	Available	433 - 446	413 - 426	152 ± 24
					470 - 483	450 - 463	152 ± 24
			Quick-release		442 ± 12	422 ± 12	82 - 128
442 ± 12					422 ± 12	176 - 222	
B03008 Hinge set PB0203601	B02038	Quick-release	Available	407 - 430	387 - 410	152 ± 24	
				454 - 477	434 - 457	152 ± 24	
				458 ± 12	438 ± 12	82 - 128	
		Quick-release		458 ± 12	438 ± 12	176 - 222	
				423 - 446	403 - 426	152 ± 24	
				470 - 493	450 - 473	152 ± 24	


Unit: mm

B1030



B1030

■ Round ■ Slow down

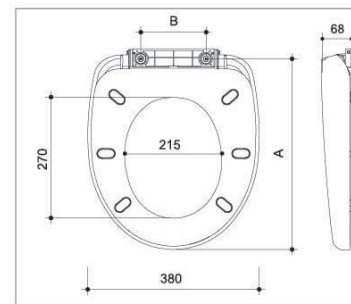

Item	Hinges available	Bolts available	Installation method	Slow down	A	B		
B1030	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	430 ± 12	160 ± 26		
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	453 ± 5	145 ± 10		
		L=60mm B02013 (without cap) L=80mm B02011 L=60mm B02014 (without cap) L=80mm B02012 (without cap)	Bottom-mounted					
	B03007 Hinge set PB6021003	B02032	Top-mounted	Available	445 ± 14	143 ± 18		
	B03005 Hinge set PB1028003		Top-mounted				436 ± 14	140 ± 21
	B03006 Hinge set PB0204101		one-button locker				438 ± 14	140 ± 21
	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	423 ± 10	145 ± 15		
	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	412 ± 12	102 - 128		
					412 ± 12	176 - 202		
					387 - 400	152 ± 24		
424 - 437					152 ± 24			
Quick-release			428 ± 12		102 - 128			
			428 ± 12		176 - 202			
			403 - 416		152 ± 24			
			440 - 453		152 ± 24			
B03008 Hinge set PB0203601	B02038	Quick-release	Available	412 ± 12	82 - 128			
				412 ± 12	176 - 222			
		Quick-release		377 - 400	152 ± 24			
				424 - 447	152 ± 24			


Unit: mm

B1034 B1035




B1034

■ Elongated Round ■ Slow down

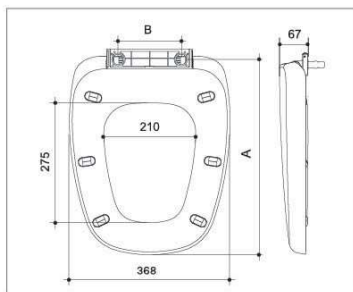

B1035

■ Round ■ Slow down

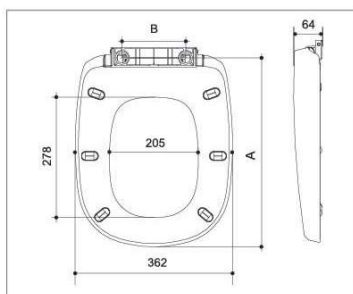


B1036 B1038




B1036

■ Round ■ Slow down

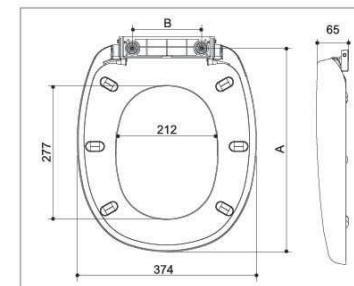

B1038

■ Round ■ Slow down

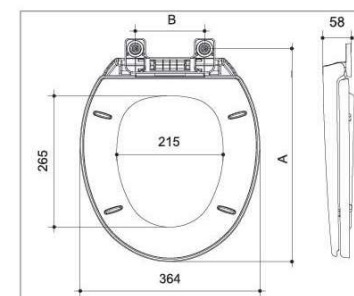

Item	Hinges available	Bolts available	Installation method	Slow down	A		
					B1034	B1035	B
B1034	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	452 ± 12	440 ± 12	160 ± 26
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	475 ± 5	463 ± 5	145 ± 10
		L=60mm L=80mm B02013 B02011 B02014 B02012 (without cap)	Bottom-mounted	Available	475 ± 5	463 ± 5	145 ± 10
	B03007 Hinge set PB6021003	B02032	Top-mounted	Available	467 ± 14	455 ± 14	143 ± 18
B1035	B03005 Hinge set PB1028003	B02032	Top-mounted	Available	458 ± 14	446 ± 14	140 ± 21
	B03006 Hinge set PB60204101		one-button locker	Available	460 ± 14	448 ± 14	140 ± 21
	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	445 ± 10	433 ± 10	145 ± 15
	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	434 ± 12 434 ± 12 409 - 422 446 - 459 450 ± 12 450 ± 12 425 - 438 462 - 475	422 ± 12 422 ± 12 397 - 410 434 - 447 438 ± 12 438 ± 12 413 - 426 450 - 463	102 - 128 176 - 202 152 ± 24 152 ± 24 102 - 128 176 - 202 152 ± 24 152 ± 24
		B02038	Top-mounted	Available	434 ± 12 399 - 422 446 - 469 450 ± 12 415 - 438 462 - 485	422 ± 12 387 - 410 434 - 457 438 ± 12 403 - 426	82 - 128 176 - 222 152 ± 24 152 ± 24 176 - 222 152 ± 24
		Quick-release	Available	434 ± 12 399 - 422 446 - 469 450 ± 12 415 - 438 462 - 485	422 ± 12 387 - 410 434 - 457 438 ± 12 403 - 426	82 - 128 176 - 222 152 ± 24 152 ± 24 176 - 222 152 ± 24	
		Quick-release	Available	434 ± 12 399 - 422 446 - 469 450 ± 12 415 - 438 462 - 485	422 ± 12 387 - 410 434 - 457 438 ± 12 403 - 426	82 - 128 176 - 222 152 ± 24 152 ± 24 176 - 222 152 ± 24	

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A	B
B1036	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	430 ± 12	160 ± 26
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	453 ± 5	145 ± 10
		L=60mm L=80mm B02013 B02011 B02014 B02012 (without cap)	Bottom-mounted	Available		
	B03007 Hinge set PB6021003		Top-mounted	Available	445 ± 14	143 ± 18
	B03005 Hinge set PB1028003	B02032	Top-mounted	Available	436 ± 14	140 ± 21
	B03006 Hinge set PB60204101		one-button locker	Available	438 ± 14	140 ± 21
	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	423 ± 10	145 ± 15
	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	412 ± 12 412 ± 12 403 - 416 440 - 453 428 ± 12 428 ± 12 403 - 416 440 - 453 412 ± 12	102 - 128 176 - 202 152 ± 24 152 ± 24 102 - 128 176 - 202 152 ± 24 152 ± 24 82 - 128
			Top-mounted	Available	412 ± 12 377 - 400 424 - 447 428 ± 12 428 ± 12 393 - 416 440 - 463	176 - 222 152 ± 24 152 ± 24 82 - 128 176 - 222 152 ± 24 152 ± 24
			Quick-release	Available	377 - 400 424 - 447 428 ± 12 428 ± 12 393 - 416 440 - 463	152 ± 24 152 ± 24 82 - 128 176 - 222 152 ± 24 152 ± 24
		Quick-release	Available	412 ± 12 377 - 400 424 - 447 428 ± 12 428 ± 12 393 - 416 440 - 463	176 - 222 152 ± 24 152 ± 24 82 - 128 176 - 222 152 ± 24 152 ± 24	
B1038	B03011 Hinge set PB1038003	B02025	Top-mounted	Available	430 ± 5	140 ± 10
		L=60mm L=80mm B02013 B02011 B02014 B02012 (without cap)	Bottom-mounted	Available		


Unit: mm

B1039 B1042




B1039

■ Elongated Round ■ Slow down

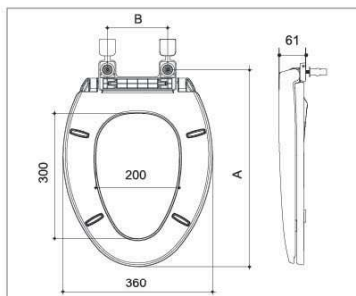

B1042

■ Elongated Round ■ Slow down

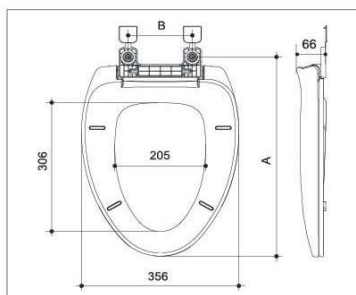


B1040 B1043




B1040

■ Round ■ Slow down

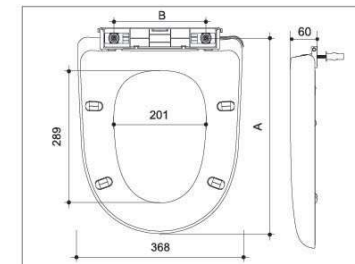

B1043

■ Elongated Round ■ Slow down

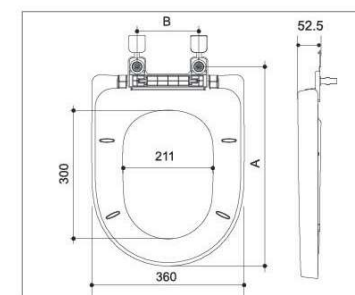

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1040	B1043	
B1039	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	450 ± 12	160 ± 26	160 ± 26
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	473 ± 5	145 ± 10	
		B02032	Bottom-mounted	Available	465 ± 14	143 ± 18	
	B03005 Hinge set PB1028003	B02032	one-button locker	Available	456 ± 14	140 ± 21	
	B03006 Hinge set PB0204101			Available	458 ± 14	140 ± 21	
B1042	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	432 ± 12	102 - 128	145 ± 15
					432 ± 12	176 - 202	
					407 - 420	152 ± 24	
					444 - 457	152 ± 24	
					448 ± 12	102 - 128	
	B02038	Quick-release	Available	448 ± 12	176 - 202		
				423 - 436	152 ± 24		
				460 - 473	152 ± 24		
				432 ± 12	82 - 128		
				432 ± 12	176 - 222		
B02038	Quick-release	Available	397 - 420	152 ± 24			
			444 - 467	152 ± 24			
			448 ± 12	82 - 128			
			448 ± 12	176 - 222			
			413 - 436	152 ± 24			
B1039	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	443 ± 10	145 ± 15	148 ± 10
		B02028	Top-mounted	Available	473 ± 5	148 ± 10	

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1040	B1043	
B1040	B03002 Hinge set PB60040051	B02017	Top-mounted	Available	434 ± 12	445 ± 12	160 ± 26
	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	457 ± 5	468 ± 5	145 ± 10
		B02027	Bottom-mounted	Available	434 ± 5	445 ± 5	189 ± 38
	B03007 Hinge set PB6021003	B02032	one-button locker	Available	449 ± 14	460 ± 14	143 ± 18
	B03005 Hinge set PB1028003			Available	440 ± 14	451 ± 14	140 ± 21
	B03006 Hinge set PB0204101	Available	442 ± 14	453 ± 14	140 ± 21		
B1043	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	427 ± 10	438 ± 10	145 ± 15
B1043	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	416 ± 12	427 ± 12	102 - 128
					416 ± 12	427 ± 12	176 - 202
					391 - 404	402 - 415	152 ± 24
					426 - 441	439 - 452	152 ± 24
					432 ± 12	443 ± 12	102 - 128
	B02038	Quick-release	Available	432 ± 12	443 ± 12	176 - 202	
				407 - 420	418 - 431	152 ± 24	
				444 - 457	455 - 468	152 ± 24	
				416 ± 12	427 ± 12	82 - 128	
				416 ± 12	427 ± 12	176 - 222	
B02038	Quick-release	Available	381 - 404	392 - 415	152 ± 24		
			426 - 451	439 - 462	152 ± 24		
			432 ± 12	443 ± 12	82 - 128		
			432 ± 12	443 ± 12	176 - 222		
			397 - 420	408 - 431	152 ± 24		
B1043	B03004 Hinge set PB1020006	B02022	Top-mounted	Available	436 ± 5	148 ± 26	


Unit: mm

B1045 B1046




B1045

- Elongated Round ■ Slow down
- Dual-purposed adult & kid seat, recommended for kids places.

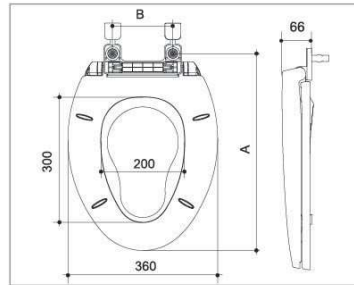

B1046

- Round ■ Slow down

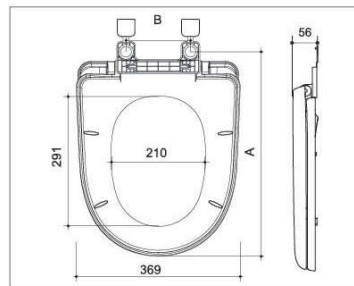


B1047 B1049




B1047

- Elongated Round ■ Slow down

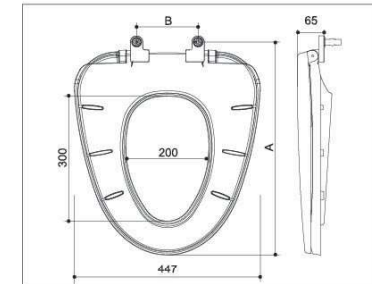

B1049

- Round ■ Slow down

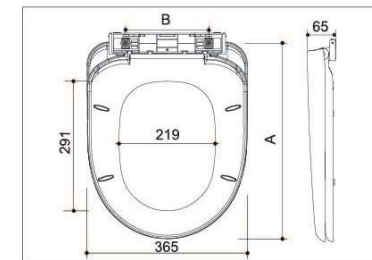

Item	Hinges available	Bolts available	Installation method	Slow down	A			
					B1045	B1046	B	
B1045	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	450 ± 12	437 ± 12	160 ± 26	
	B03007 Hinge set PB6021003	B02032	Top-mounted	Available	465 ± 14	452 ± 14	143 ± 18	
	B03005 Hinge set PB1028003			Available	456 ± 14	443 ± 14	140 ± 21	
	B03006 Hinge set PB0204101			one-button locker	Available	458 ± 14	445 ± 14	140 ± 21
	B03004 Hinge set PB1020006	B02034	Top-mounted	Available	443 ± 10	430 ± 10	145 ± 15	
	B1046	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	432 ± 12	419 ± 12	102 - 128
						432 ± 12	419 ± 12	176 - 202
						407 - 420	394 - 407	152 ± 24
						444 - 457	431 - 444	152 ± 24
						448 ± 12	435 ± 12	102 - 128
B02038			Quick-release	Available	448 ± 12	435 ± 12	176 - 202	
					448 ± 12	435 ± 12	176 - 202	
					423 - 436	410 - 423	152 ± 24	
					460 - 473	447 - 460	152 ± 24	
					432 ± 12	419 ± 12	82 - 128	
B02038	Quick-release	Available	432 ± 12	419 ± 12	176 - 222			
			397 - 420	384 - 407	152 ± 24			
			444 - 467	431 - 454	152 ± 24			
			448 ± 12	435 ± 12	82 - 128			
			448 ± 12	435 ± 12	176 - 222			
B1045	B03003 Hinge set PB1023003	B02025	Top-mounted	Available	473 ± 5		145 ± 10	
	B1046	B03003 Hinge set PB1023003	B02025	Top-mounted	460 ± 5		145 ± 10	
Bottom-mounted			Available	460 ± 5		145 ± 10		

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A		B	
					B1047	B1049		
B1047	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	489 ± 12	440 ± 12	160 ± 26	
					512 ± 5	463 ± 5		
		B02025	Top-mounted	Available	512 ± 5	463 ± 5	145 ± 10	
					512 ± 5	463 ± 5		
		B03003 Hinge set PB1023003	L=40mm B02013 (without cap) L=60mm B02011 (without cap) L=60mm B02014 (without cap) L=80mm B02012 (without cap)	Bottom-mounted	Available	504 ± 14	455 ± 14	143 ± 18
						495 ± 14	446 ± 14	
		B03007 Hinge set PB6021003	B02032	Top-mounted	Available	495 ± 14	446 ± 14	140 ± 21
						495 ± 14	446 ± 14	
		B03005 Hinge set PB1028003	B02032	one-button locker	Available	497 ± 14	448 ± 14	140 ± 21
						497 ± 14	448 ± 14	
B03004 Hinge set PB1020006	B02034	Top-mounted	Available	482 ± 10	433 ± 10	145 ± 15		
				471 ± 12	422 ± 12			
B1049	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	471 ± 12	422 ± 12	102 - 128	
					471 ± 12	422 ± 12		
					446 - 459	397 - 410		152 ± 24
					483 - 496	434 - 447		152 ± 24
					487 ± 12	438 ± 12		102 - 128
		B02038	Quick-release	Available	487 ± 12	438 ± 12	176 - 202	
					462 - 475	413 - 426	152 ± 24	
					499 - 512	450 - 463	152 ± 24	
					471 ± 12	422 ± 12	82 - 128	
					471 ± 12	422 ± 12	176 - 222	
B02038	Quick-release	Available	436 - 459	387 - 410	152 ± 24			
			483 - 506	434 - 457	152 ± 24			
			487 ± 12	438 ± 12	82 - 128			
			487 ± 12	438 ± 12	176 - 222			
			452 - 475	403 - 426	152 ± 24			
B1047	B03009 Hinge set PB1040003	B02028	Top-mounted	Available	512 ± 5		148 ± 10	
					512 ± 5			
B1049	B03009 Hinge set PB1040003	B02027	Top-mounted	Available	440 ± 5		189 ± 38	
					440 ± 5			


Unit: mm

B1090 B1091




B1090

■ Round ■ Slow down

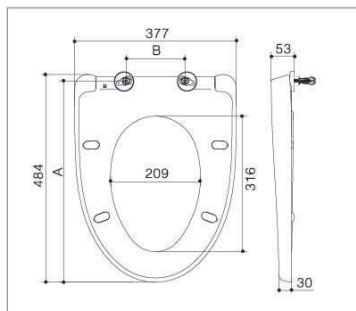

B1091

Disabled open-front seat
Self-sustaining at any angle

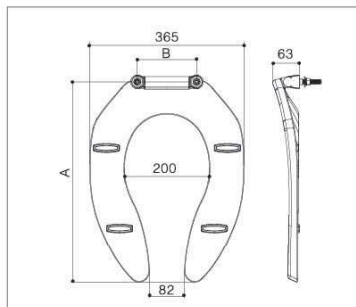

Item	Bolts available	Installation method	Slow down	A	B
B1090	B02005	Quick-release	Available	440 – 490	122 – 222
	B020051	Quick-release	Available	430 – 500	102 – 242
B1091		Bottom-mounted		474	140


Unit: mm

B1051 B1055




B1051

■ Elongated Round ■ Slow down

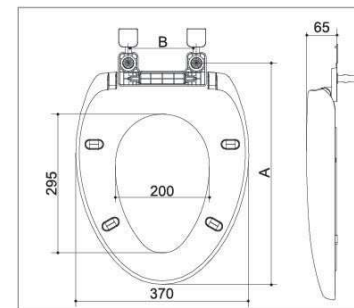

B1055

■ Round ■ Slow down

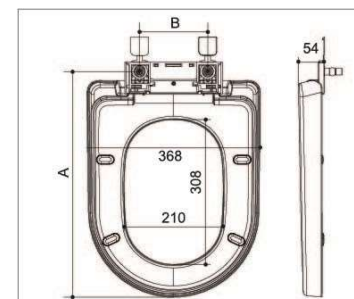

Item	Hinges available	Bolts available	Installation method	Slow down	A		B
					B1051	B1055	
B1051	B03002/B03003	B02017	Bottom-mounted	Available	448 ± 12	458 ± 12	160 ± 26
	B03003/B03004	B02025	Top-mounted	Available	471 ± 5	481 ± 5	145 ± 10
		L-60mm (without cap)	Bottom-mounted				
	B03007/B03008	B02032	Top-mounted	Available	463 ± 14	473 ± 14	143 ± 18
	B03005/B03006	B02032	one-button locker	Available	454 ± 14	464 ± 14	140 ± 21
B1055	B03006/B03007	B02034	Top-mounted	Available	441 ± 10	451 ± 10	145 ± 15
	B03008/B03009	B02036	Top-mounted	Available	430 ± 12	440 ± 12	102 – 128
			Top-mounted	Available	430 ± 12	440 ± 12	176 – 202
			Top-mounted	Available	405 – 418	415 – 428	152 ± 24
			Top-mounted	Available	442 – 455	452 – 465	152 ± 24
			Top-mounted	Available	446 ± 12	456 ± 12	102 – 128
			Top-mounted	Available	446 ± 12	456 ± 12	176 – 202
	B03008/B03009	B02036	Top-mounted	Available	421 – 434	431 – 444	152 ± 24
			Top-mounted	Available	458 – 471	468 – 481	152 ± 24
			Top-mounted	Available	430 ± 12	440 ± 12	82 – 128
Top-mounted			Available	430 ± 12	440 ± 12	176 – 222	
B03008/B03009	B02038	Quick-release	Available	395 – 418	405 – 428	152 ± 24	
		Quick-release	Available	442 – 465	452 – 475	152 ± 24	
		Quick-release	Available	446 ± 12	456 ± 12	82 – 128	
		Quick-release	Available	446 ± 12	456 ± 12	176 – 222	
		Quick-release	Available	411 – 434	421 – 444	152 ± 24	
B1051	B03009/B03004	B02027	Top-mounted	Available	448 ± 5	189 ± 38	


Unit: mm

B1056 B1058




B1056

■ Elongated Round ■ Slow down

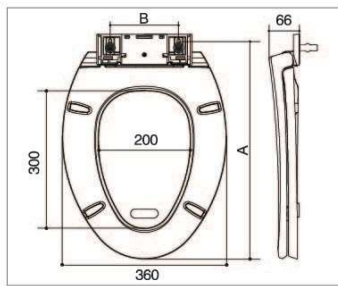

B1058

■ Round ■ Slow down




B1060 B1061




B1060

■ Round ■ Slow down

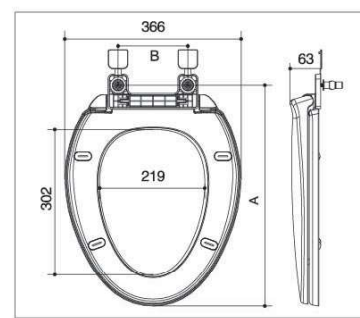

B1061

■ Round ■ Slow down

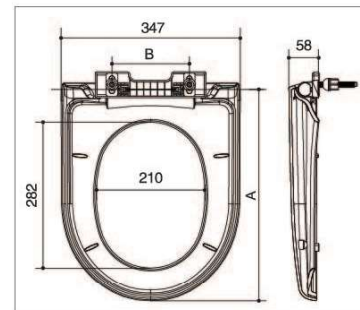

Item	Hinges available	Bolts available	Installation method	Slow down	A		B	
					B1056	B1058		
B1056	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	450 ± 12	410 ± 12	160 ± 26	
			Top-mounted	Available				
	B03003 Hinge set PB1023003	B02025	Bottom-mounted	Available	473 ± 5	433 ± 5	145 ± 10	
			Bottom-mounted	Available				
	B03007 Hinge set PB6021003 B03005 Hinge set PB1028003 B03006 Hinge set PB0204101 B03004 Hinge set PB1020006	B02032	Quick-release	Available	465 ± 14	425 ± 14	143 ± 18	
				Available	456 ± 14	416 ± 14	140 ± 21	
			one-button locker	Available	458 ± 14	418 ± 14	140 ± 21	
				Available	443 ± 10	403 ± 10	145 ± 15	
	B1058	B03008 Hinge set PB0203601	B02036	Top-mounted	Available	432 ± 12	392 ± 12	102 - 128
					Available	432 ± 12	392 ± 12	176 - 202
Quick-release				Available	407 - 420	367 - 380	152 ± 24	
				Available	444 - 457	404 - 417	152 ± 24	
Top-mounted				Available	448 ± 12	408 ± 12	102 - 128	
				Available	448 ± 12	408 ± 12	176 - 202	
Quick-release				Available	423 - 436	383 - 396	152 ± 24	
				Available	460 - 473	420 - 433	152 ± 24	
				Available	432 ± 12	392 ± 12	82 - 128	
				Available	432 ± 12	392 ± 12	176 - 222	
B1056	B02022	B02028	Top-mounted	Available	441 ± 5	148 ± 26		
				Available	473 ± 5	148 ± 10		
			Quick-release	Available	448 ± 12	408 ± 12	82 - 128	
				Available	448 ± 12	408 ± 12	176 - 222	
				Available	413 - 436	373 - 396	152 ± 24	
				Available	460 - 483	420 - 443	152 ± 24	
B1058	B03009 Hinge set PB1040003	B02027	Top-mounted	Available	410 ± 5	189 ± 38		

Unit: mm


Item	Hinges available	Bolts available	Installation method	Slow down	A		B	
					B1060	B1061		
B1060	B03002 Hinge set PB60040051	B02017	Bottom-mounted	Available	438 ± 12	411 ± 12	160 ± 26	
			Top-mounted	Available				
	B03003 Hinge set PB1023003	B02025	Bottom-mounted	Available	461 ± 5	434 ± 5	145 ± 10	
			Bottom-mounted	Available				
	B03007 Hinge set PB6021003 B03005 Hinge set PB1028003 B03006 Hinge set PB0204101 B03004 Hinge set PB1020006	B02032	Quick-release	Available	453 ± 14	426 ± 14	143 ± 18	
				Available	444 ± 14	417 ± 14	140 ± 21	
			one-button locker	Available	446 ± 14	419 ± 14	140 ± 21	
				Available	431 ± 10	404 ± 10	145 ± 15	
	B1061	B03008 Hinge set PB0203601	B02034	Top-mounted	Available	420 ± 12	393 ± 12	102 - 128
					Available	420 ± 12	393 ± 12	176 - 202
Quick-release				Available	395 - 408	368 - 381	152 ± 24	
				Available	432 - 445	405 - 418	152 ± 24	
Top-mounted				Available	436 ± 12	409 ± 12	102 - 128	
				Available	436 ± 12	409 ± 12	176 - 202	
Quick-release				Available	411 - 424	384 - 397	152 ± 24	
				Available	448 - 461	421 - 434	152 ± 24	
				Available	420 ± 12	393 ± 12	82 - 128	
				Available	420 ± 12	393 ± 12	176 - 222	
B1061	B02038	B02038	Quick-release	Available	385 - 408	358 - 381	152 ± 24	
				Available	432 - 455	405 - 428	152 ± 24	
			Quick-release	Available	436 ± 12	409 ± 12	82 - 128	
				Available	436 ± 12	409 ± 12	176 - 222	
				Available	401 - 424	374 - 397	152 ± 24	
				Available	448 - 471	421 - 444	152 ± 24	

Unit: mm


B1062 B1063



B1062
■ Round ■ Slow down

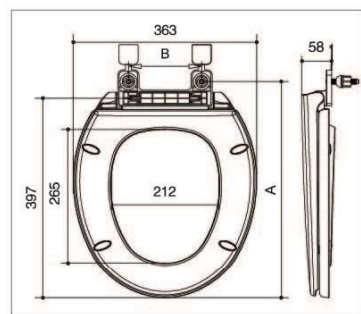


B1063
■ Round ■ Slow down

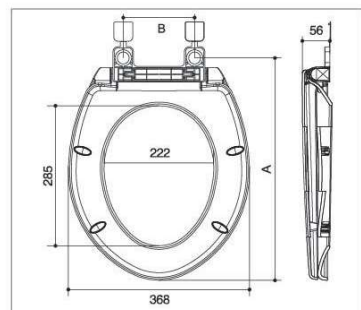


B1066 B1068



B1066
■ Round ■ Slow down

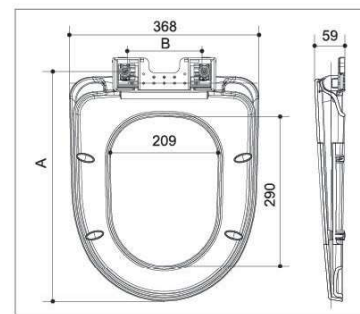

B1068
■ Round ■ Slow down

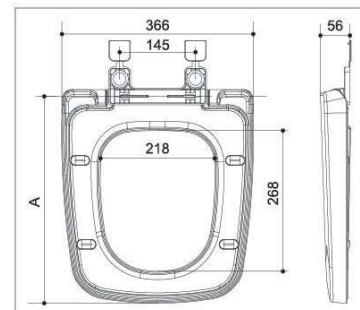

Item	Hinges available	Bolts available	Installation method	Slow down	A		
					B1062	B1063	B
B1062	B03002Hinge set PB60040051	B02017	Bottom-mounted	Available	407 ± 12	427 ± 12	160 ± 26
	B03003Hinge set PB1023003	B02025	Top-mounted	Available	430 ± 5	450 ± 5	145 ± 10
		Bottom-mounted	Available				
	B03007Hinge set PB6021003	B02032	Quick-release	Available	422 ± 14	442 ± 14	143 ± 18
B03005Hinge set PB1028003	one-button locker		Available	413 ± 14	433 ± 14	140 ± 21	
B1063	B03006Hinge set PB0204101	B02034	Quick-release	Available	415 ± 14	435 ± 14	140 ± 21
B03004Hinge set PB1020006	Quick-release		Available	400 ± 10	420 ± 10	145 ± 15	
B1066	B03008Hinge set PB0203601	B02036	Top-mounted	Available	389 ± 12	409 ± 12	102 - 128
					389 ± 12	409 ± 12	176 - 202
			Quick-release	Available	364 - 377	384 - 397	152 ± 24
					401 - 414	421 - 434	152 ± 24
					405 ± 12	425 ± 12	102 - 128
					405 ± 12	425 ± 12	176 - 202
	B03009Hinge set PB0203601	B02038	Top-mounted	Available	380 - 393	400 - 413	152 ± 24
					417 - 430	437 - 450	152 ± 24
			Quick-release	Available	389 ± 12	409 ± 12	82 - 128
					389 ± 12	409 ± 12	176 - 222
					354 - 377	374 - 397	152 ± 24
					401 - 424	421 - 444	152 ± 24
B1068	B02038	Quick-release	Available	405 ± 12	425 ± 12	82 - 128	
				405 ± 12	425 ± 12	176 - 222	
		Quick-release	Available	370 - 393	390 - 413	152 ± 24	
				417 - 440	437 - 460	152 ± 24	

Unit: mm

Item	Hinges available	Bolts available	Installation method	Slow down	A				
					B1066	B1068	B		
B1066	B03002Hinge set PB60040051	B02017	Bottom-mounted	Available	434 ± 12	406 ± 12	160 ± 26		
					B02025	Top-mounted	Available	457 ± 5	429 ± 5
	B03003Hinge set PB1023003	B02032	Bottom-mounted	Available	449 ± 14	421 ± 14	143 ± 18		
					Quick-release	Available	440 ± 14	412 ± 14	140 ± 21
B1068	B03006Hinge set PB0204101	B02034	Quick-release	Available	442 ± 14	414 ± 14	140 ± 21		
					one-button locker	Available	427 ± 10	399 ± 10	145 ± 15
			B03004Hinge set PB1020006	B02034	Quick-release	Available	416 ± 12	388 ± 12	102 - 128
							416 ± 12	388 ± 12	176 - 202
					Top-mounted	Available	391 - 404	363 - 376	152 ± 24
							428 - 441	400 - 413	152 ± 24
	432 ± 12	404 ± 12					102 - 128		
	432 ± 12	404 ± 12					176 - 202		
	B03008Hinge set PB0203601	B02036	Top-mounted	Available	407 - 420	379 - 392	152 ± 24		
					444 - 457	416 - 429	152 ± 24		
			Quick-release	Available	416 ± 12	388 ± 12	82 - 128		
					416 ± 12	388 ± 12	176 - 222		
381 - 404					353 - 376	152 ± 24			
428 - 451					400 - 423	152 ± 24			
B1068	B02038	Quick-release	Available	432 ± 12	404 ± 12	82 - 128			
				432 ± 12	404 ± 12	176 - 222			
		Quick-release	Available	397 - 420	369 - 392	152 ± 24			
				444 - 467	416 - 439	152 ± 24			

Unit: mm


PP TOILET SEAT

B1070 B1073




B1070

■ Round ■ Slow down

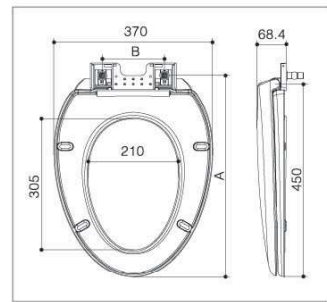

B1073

■ Round ■ Slow down

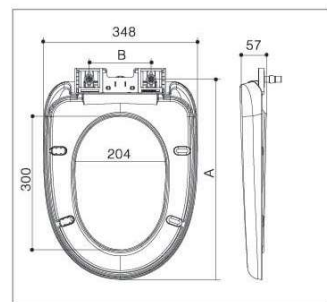


B1050 B1078




B1050

■ Elongated Round ■ Slow down

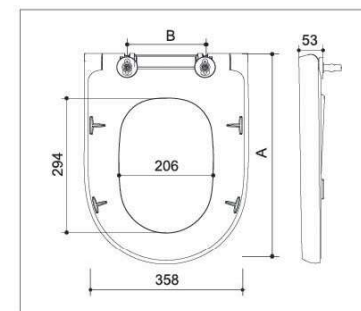

B1078

■ Round ■ Slow down

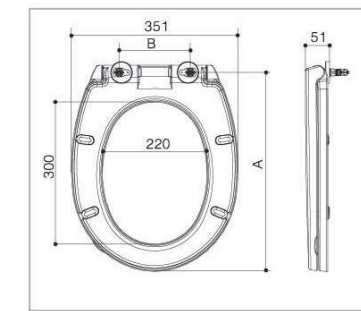

Item	Hinges available	Bolts available	Installation method	Slow down	A		B	
					B1070	B1073		
B1070	B03002Hinge set PB60040051	B02017	Bottom-mounted	Available	460 ± 12	443 ± 12	160 ± 26	
					475 ± 14	458 ± 14	143 ± 18	
	B03007Hinge set PB6021003	B02032	Quick-release	Available	466 ± 14	449 ± 14	140 ± 21	
					468 ± 14	451 ± 14	140 ± 21	
	B03005Hinge set PB1028003	B02034	Quick-release	Available	453 ± 10	436 ± 10	145 ± 15	
					442 ± 12	425 ± 12	102-128	
	B1073	B03008Hinge set PB0204101	B02036	Top-mounted	Available	442 ± 12	425 ± 12	176-202
						417-430	400-413	152 ± 24
		B03004Hinge set PB1020006	B02038	Quick-release	Available	454-467	437-450	152 ± 24
						458 ± 12	441 ± 12	102-128
B03008Hinge set PB0203601		B02036	Top-mounted	Available	458 ± 12	441 ± 12	176-202	
					433-446	416-429	152 ± 24	
B03003Hinge set PB1023003		B02038	Quick-release	Available	470-483	453-466	152 ± 24	
					442 ± 12	425 ± 12	82-128	
B1070		B03003Hinge set PB1023003	B02025	Top-mounted	Available	442 ± 12	425 ± 12	176-222
						407-430	390-413	152 ± 24
B1073	B03003Hinge set PB1023003	B02025	Top-mounted	Available	454-477	437-460	152 ± 24	
					458 ± 12	441 ± 12	82-128	
B1070	B03003Hinge set PB1023003	B02025	Bottom-mounted	Available	458 ± 12	441 ± 12	176-222	
					423-446	406-429	152 ± 24	
B1073	B03003Hinge set PB1023003	B02025	Bottom-mounted	Available	470-493	453-476	152 ± 24	
					466 ± 5		145 ± 10	

Unit: mm

Item	Bolts available	Installation method	Slow down	A	B
B1050	B02033	Quick-release	Available	445 ± 12	120-146
				445 ± 12	194-220
	B02037	Quick-release	Available	420-433	170 ± 24
				457-470	170 ± 24
B1078	B02005	Quick-release	Available	445 ± 12	100-146
				445 ± 12	194-240
	B02005	Quick-release	Available	410-433	170 ± 24
				457-480	170 ± 24
	B02005	Quick-release	Available	420 ± 12	64-90
				420 ± 12	138-164
B02005	Quick-release	Available	395-408	114 ± 24	
			432-445	114 ± 24	
B02005	Quick-release	Available	420 ± 12	44-90	
			420 ± 12	138-184	
B02005	Quick-release	Available	385-408	114 ± 24	
			432-455	114 ± 24	

Unit: mm